

PRODUCT RANGE SPECIFICATION

04VF_WAL-103LC – Walcro 103LC Concealed Toilet Flushing Valve, 20 mm

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	04VF_WAL-103LC{PSS}	Published catalogue data	14 Sep 2026

01 Product description and specification

Product description	The Walcro 103LC flushing valve is designed for concealed back-entry toilet installations. It uses a 20 mm BSP inlet and has a stated operating pressure range of 100–600 kPa. The flushing volume can be adjusted on site. The valve arrangement allows repeated operation without waiting for a cistern to refill.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Walcro 103LC concealed back-entry toilet flushing valve, catalogue reference 04VF_WAL-103LC. 20 mm BSP inlet; stated operating pressure range 100–600 kPa. Flushing volume is adjustable on site.

02 Models and configurations

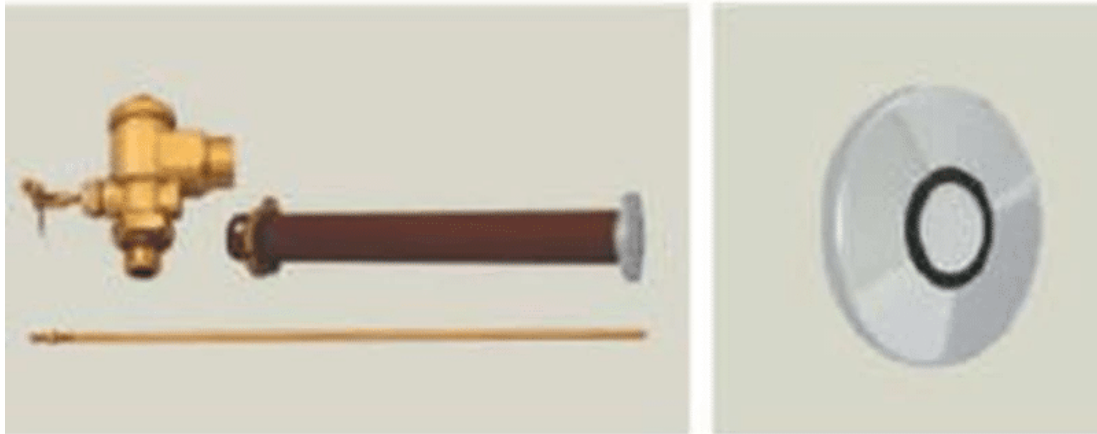
MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
04VF_WAL-103LC	Toilet Flushing Valve Walcro 103lc 20mm Concealed With Vr Button And Sleeve	Standard configuration

03 Application information

Intended applications	Public Restrooms
Industries	Government & Public Sector

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images**PRODUCT IMAGE**

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.