

PRODUCT RANGE SPECIFICATION

A45146(112) – Heavy Duty Recessed Sorting Table with End Outlet



PRODUCT IMAGE · Representative recessed sorting table with end outlet and inset outlet–end legs. Length and width vary by configuration.

❶ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE

Product range

DOCUMENT REFERENCE

A45146(112){PSS}

DATA STATUS

Published catalogue data

GENERATED ON

15 Oct 2026

Detailed item specifications

Select an item code for its detailed specification sheet, including model dimensions, technical specifications and drawings. For a printed copy, scan the QR code or visit the product page and select the item.

<https://basterfield.co.za/products/a45146112-heavy-duty-recessed-sorting-table-with-end-outlet#specifications>



01 Product description and specification

Product description

Heavy duty Grade 304 stainless steel sorting table with a 1.2mm worktop, 100mm recess and 300mm end outlet. Inset legs create an overhang for a receiving crate. Full stainless steel framework, cross bracing and black plastic adjustable feet.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Sorting Table Stainless Steel Grade 304 Heavy Duty 1.2mm Thickness with 100mm Recess, 300mm Wide Outlet at One End, Inset Outlet–End Legs, Full Stainless Steel Framework, Cross Bracing, Ø38.1mm Tubular Legs and Black Plastic Adjustable Feet. 1000mm Overall Height to Top Edge; 900mm Working Surface Height.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Working Height	900	mm	Recessed working-surface height: 1000mm overall height less the 100mm recess.
Overall height	1000	mm	Overall height measured to the top edge.
Material	Stainless Steel Grade 304	–	Material of the sorting-table worktop.
Material Thickness	1.2	mm	Thickness of the stainless steel worktop.
Product Range	Heavy Duty	–	Heavy duty construction.
Recessed Slab Depth	100	mm	Vertical depth from the top edge to the recessed working surface.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Slab Edge	Deep Recess with End Outlet	—	A deep recessed top with a 300mm wide opening at one end.
Framework Material	Stainless Steel	—	Full stainless steel underframework.
Cross Bracing	Yes	—	Cross bracing is included in the underframework.
Leg Profile	Round Tubular	—	Round tubular stainless steel legs with a Ø38.1mm outside diameter.
Leg Diameter	38.1	mm	Outside diameter of the round tubular stainless steel legs.
Feet Material	Black Plastic	—	Black plastic levelling feet.
Adjustable Feet	Yes	—	Feet adjust to level the table.
Outlet Width	300	mm	Width of the open discharge section at one end of the recessed top.
Outlet Position	One End	—	The outlet is an opening in the end wall of the recessed worktop.
Outlet-End Leg Arrangement	Inset to Provide Overhang	—	The legs at the outlet end are set back from the top to create an overhang and provide space to position a receiving container beneath the opening.

03 Models and configurations

ITEM CODE	LENGTH	WIDTH
A45146(112-1200x0600)	1200 mm	600 mm
A45146(112-1200x0650)	1200 mm	650 mm
A45146(112-1200x0700)	1200 mm	700 mm
A45146(112-1500x0600)	1500 mm	600 mm
A45146(112-1500x0650)	1500 mm	650 mm
A45146(112-1500x0700)	1500 mm	700 mm
A45146(112-1800x0600)	1800 mm	600 mm
A45146(112-1800x0650)	1800 mm	650 mm
A45146(112-1800x0700)	1800 mm	700 mm
A45146(112-2000x0600)	2000 mm	600 mm
A45146(112-2000x0650)	2000 mm	650 mm
A45146(112-2000x0700)	2000 mm	700 mm
A45146(112-2400x0600)	2400 mm	600 mm
A45146(112-2400x0650)	2400 mm	650 mm
A45146(112-2400x0700)	2400 mm	700 mm

04 Functional features



01	100mm Deep Recess The deep recessed work area helps contain food items while they are sorted and inspected by hand.
02	300mm End Outlet A 300mm wide opening at one end lets operators move sorted food items from the recessed surface into a crate or other receiving container below.
03	Inset Legs at the Outlet End The legs at the outlet end are set back from the top to create an overhang and provide space to position a receiving container beneath the opening.
04	Heavy Duty Grade 304 Worktop The worktop is made from 1.2mm Grade 304 stainless steel.
05	Full Stainless Steel Underframework The full stainless steel underframework includes cross bracing and round tubular legs with a Ø38.1mm outside diameter. Black plastic adjustable feet allow the table to be levelled.
06	Black Plastic Adjustable Feet Adjustable feet allow the sorting table to be levelled.
07	1000mm Overall Height Overall height is 1000mm to the top edge. The 100mm recess places the working surface at 900mm above floor level.


05 Application information

Intended applications	Dry Goods Sorting, Food Preparation Workstations
Industries	Agriculture & Horticulture, Food & Beverage Processing, Fresh Produce & Packhouses


06 Supply and support

Typical lead time	10–15 working days
Warranty	24 months

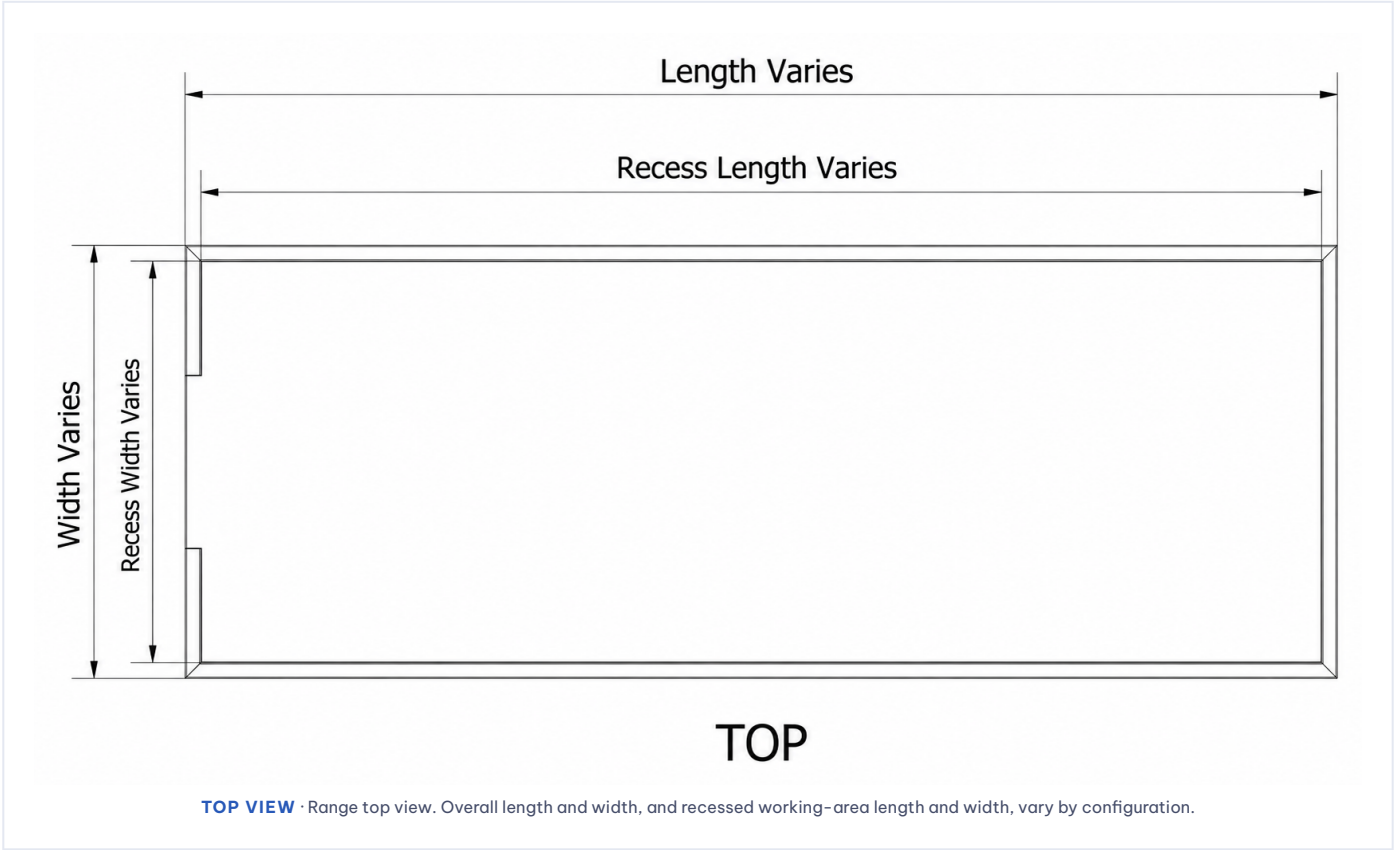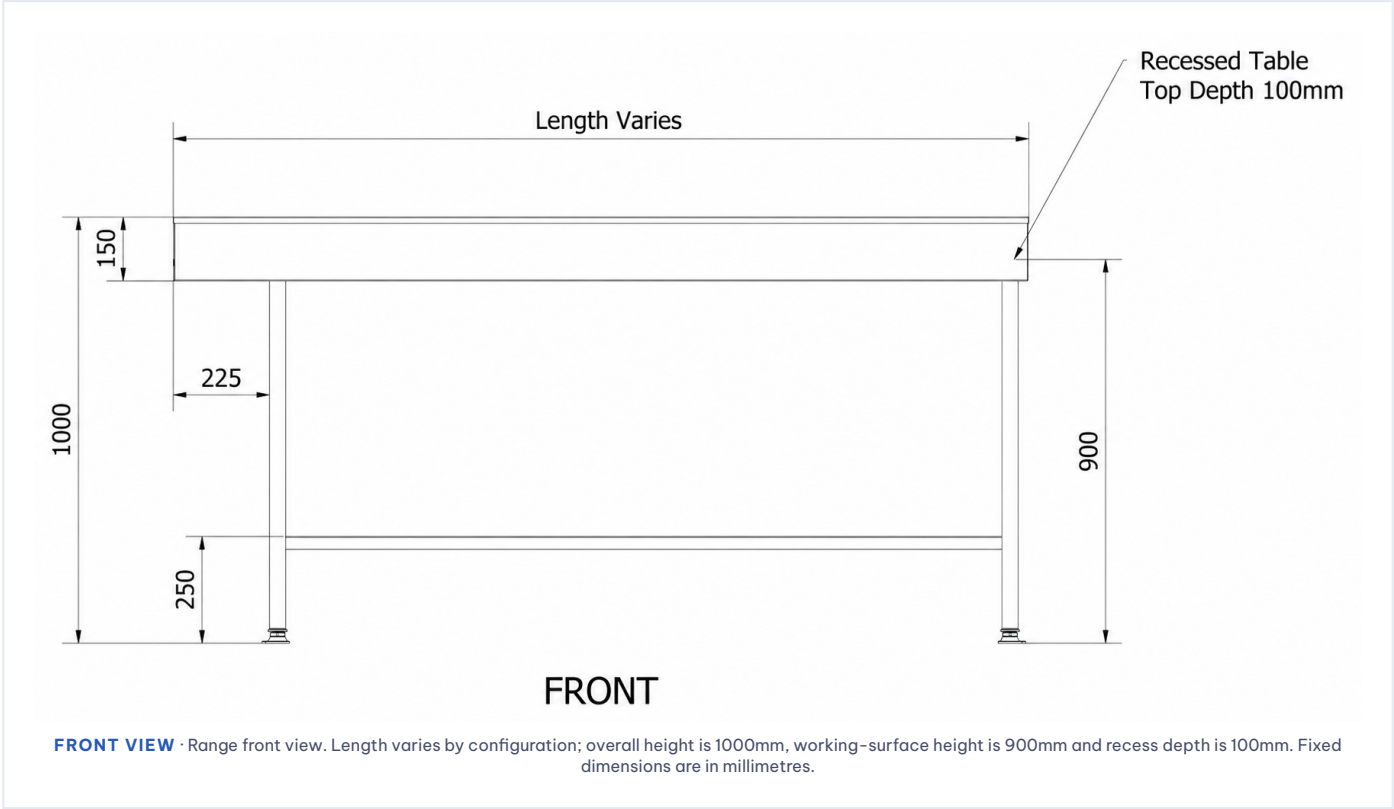

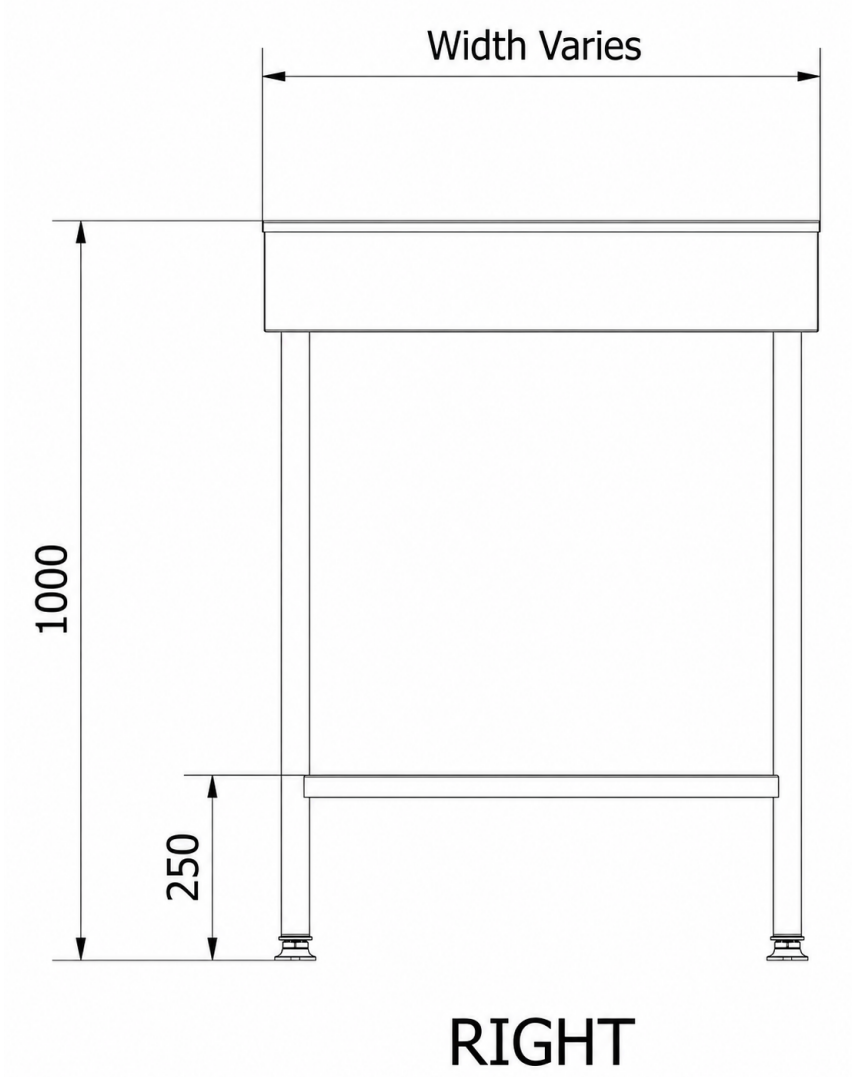

RIGHT VIEW · Range right view. Width varies by configuration; overall height is 1000mm. Fixed dimensions are in millimetres.

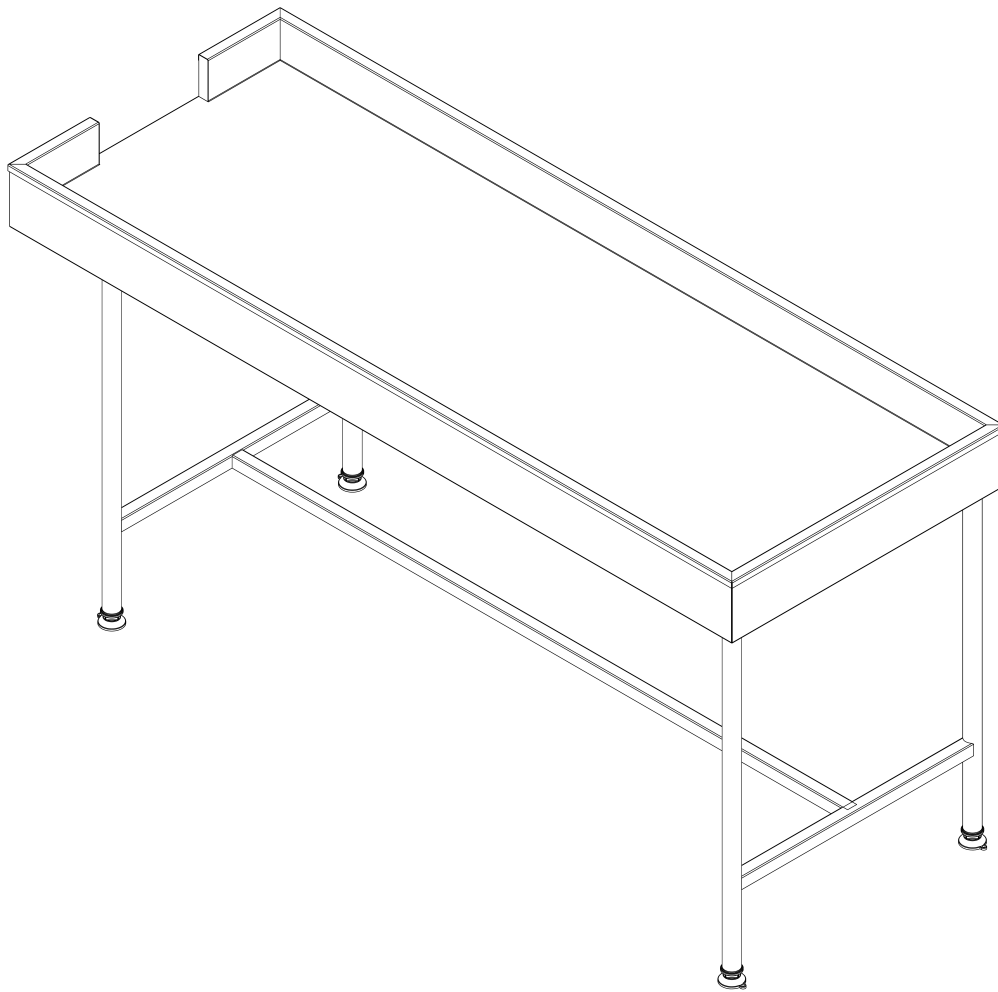

TOP RIGHT

ISOMETRIC VIEW · Representative isometric view of the recessed sorting table and stainless steel underframework. Length and width vary by configuration.

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.