

MODEL SPECIFICATION

A46450(115-0260x0140x0120) – Label Printer Tray
Stainless Steel Grade 304
1.5mm



PRODUCT IMAGE · 1.5mm Grade 304 stainless steel label printer tray - A46450(115-0260x0140x0120)

DOCUMENT SCOPE Model	DOCUMENT REFERENCE A46450(115-0260x0140x0120) {PSS}	DATA STATUS Published catalogue data	GENERATED ON 22 Oct 2026
-------------------------	--	---	-----------------------------

01 Model specification

Label Printer Tray Stainless Steel Grade 304 1.5mm Thickness 260mm (L) x 140mm (W) x 120mm (H) with Fully-Welded Construction, 30mm Deep Tray, 2 x Ø6mm Rear Mounting Holes and 50mm x 30mm Cable Cutout

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	–	Grade 304 stainless steel used for the tray construction.
Length	260	mm	Overall projection from the rear mounting face to the front of the tray.
Width	140	mm	Overall side-to-side width of the tray and rear mounting plate.
Height	120	mm	Overall height from the underside of the base to the top of the rear mounting plate.
Material Thickness	1.5	mm	Sheet thickness of this label printer tray; available in 2mm and 1.5mm.
Construction	Fully-Welded	–	Fully-welded label printer tray with raised tray edges and an upright rear mounting plate.
Mounting Hole Diameter	6	mm	Diameter of each of the two holes in the rear mounting plate.
Bracket Mounting Hole Pitch	90	mm	Centre-to-centre spacing of the two rear mounting holes.

03 Dimensions and mass


PARAMETER	VALUE	UNIT
Length	260	mm
Width	140	mm
Overall height	120	mm

04 Model and supply data

Parent product	A46450 – Label Printer Tray
Typical lead time	10–15 working days
Warranty	12 months


05 Specification notes

Configuration description	Fully-welded label printer tray manufactured from 1.5mm Grade 304 stainless steel for pharmaceutical and cannabis production labelling stations. Overall dimensions are 260mm (L) x 140mm (W) x 120mm (H), with a 30mm deep tray. The rear plate has two Ø6mm mounting holes on 90mm centres and R2 upper corners. A 50mm x 30mm obround cable cutout with R15 ends is provided in the tray base. Check the supplied general arrangement drawings against the printer footprint and connection clearances.
Short Form Specification	SPECIFICATION USE Use this description when specifying this model. Label Printer Tray Stainless Steel Grade 304 1.5mm Thickness 260mm (L) x 140mm (W) x 120mm (H) with Fully-Welded Construction, 30mm Deep Tray, 2 x Ø6mm Rear Mounting Holes and 50mm x 30mm Cable Cutout, 90mm Mounting-Hole Centres and R2 Upper Rear-Plate Corners
Detailed specification	• Item Type: Label Printer Tray • Construction: Fully-Welded • Material: Stainless Steel Grade 304 • Material Thickness: 1.5mm • Overall Dimensions: 260mm (L) x 140mm (W) x 120mm (H) • Tray Depth: 30mm • Rear Mounting Holes: 2 x Ø6mm • Rear Mounting Hole Centres: 90mm • Mounting Hole Centre to Nearest Side Edge: 25mm • Mounting Hole Centre Height Above Base: 90mm • Upper Rear-Plate Corner Radius: R2 • Cable Cutout: 50mm x 30mm, Obround with R15 Ends • Cable Cutout Centreline from Inside Face of Rear Plate: 32mm

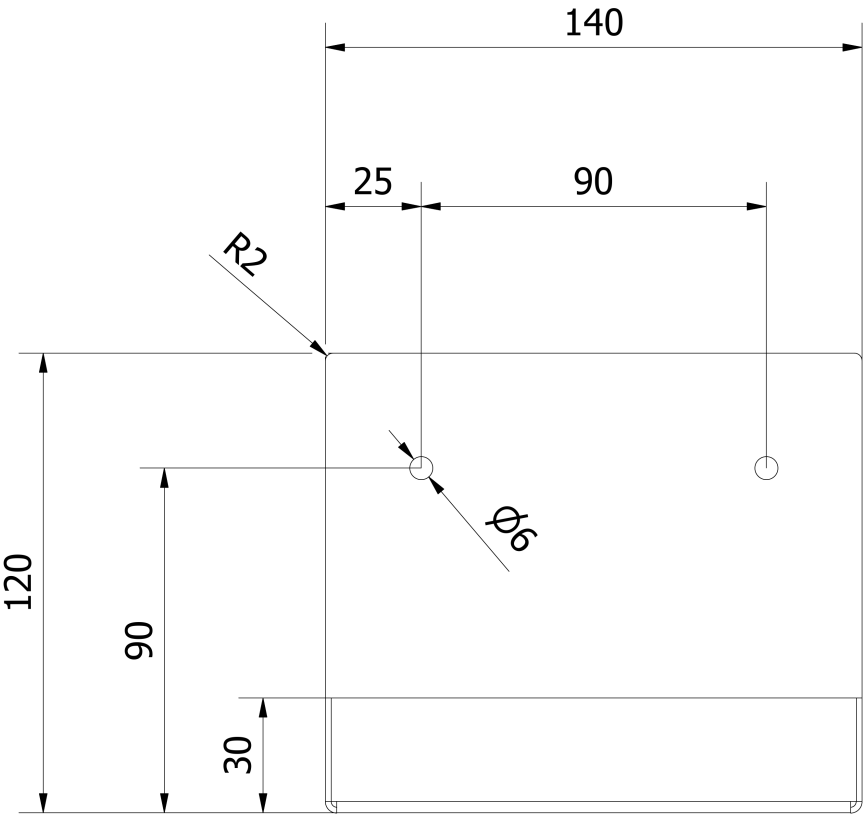

FRONT

FRONT VIEW · Front elevation - A46450(115-0260x0140x0120)

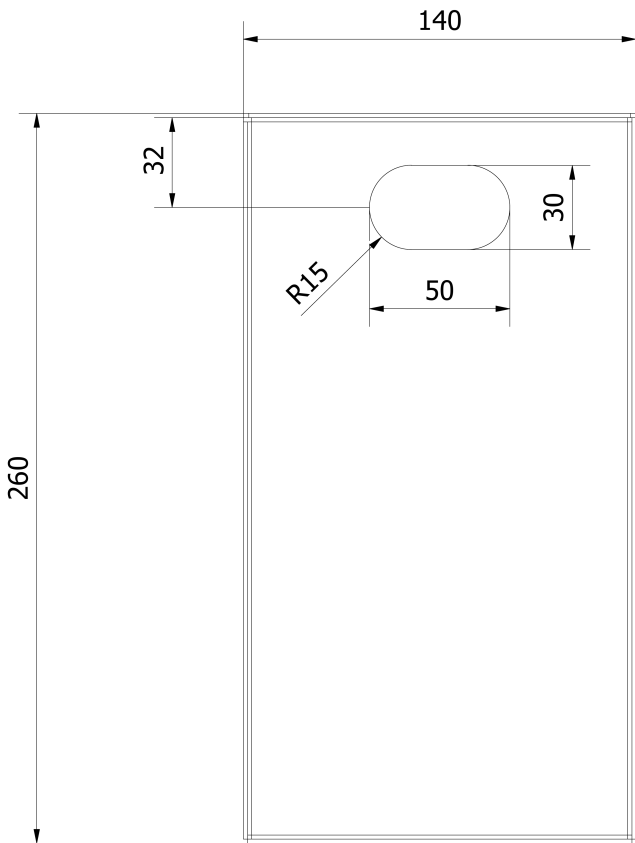


TOP

TOP VIEW · Top view - A46450(115-0260x0140x0120)



RIGHT

RIGHT VIEW · Right elevation - A46450(115-0260x0140x0120)

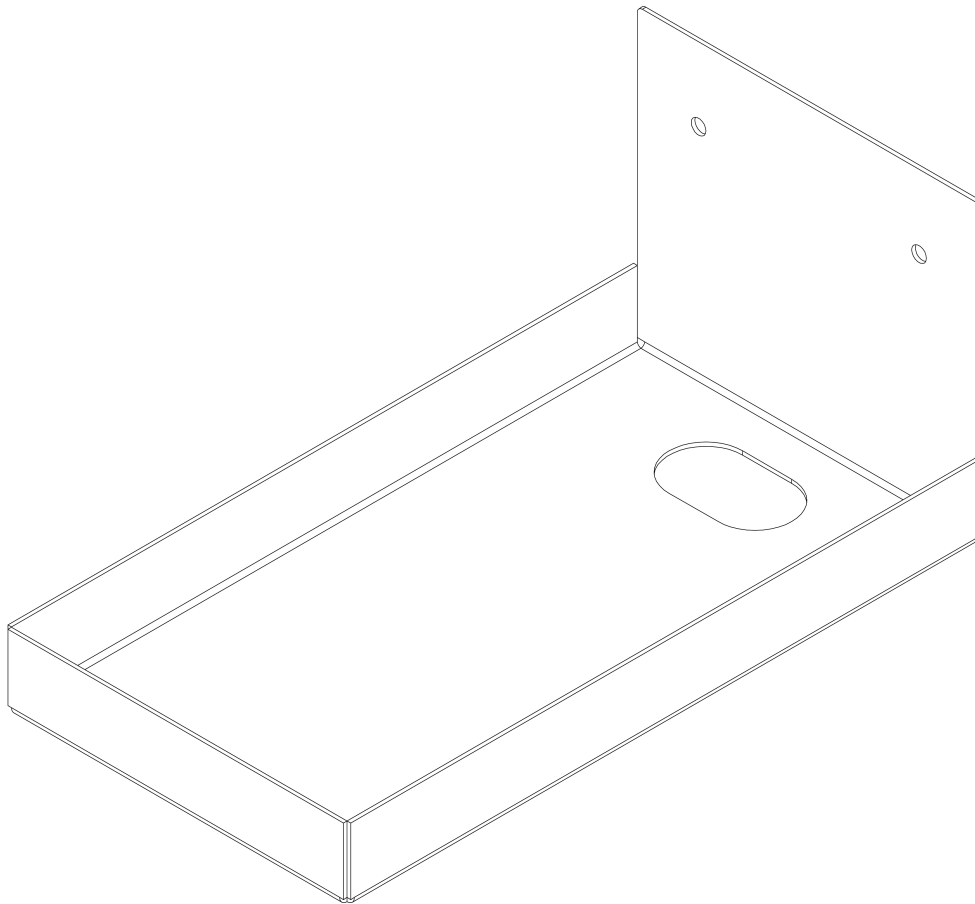

TOP RIGHT

ISOMETRIC VIEW · Top-right isometric view - A46450(115-0260x0140x0120)

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.