PRODUCT RANGE SPECIFICATION

# A46450 – Label Printer Tray



**PRODUCT IMAGE** · 2mm Grade 304 stainless steel label printer tray - A46450

ⓘ Product image is representative of the range and may not reflect the actual item.

| DOCUMENT SCOPE | DOCUMENT REFERENCE | GENERATED ON |
|---|---|---|
| **Product range** | **A46450{PSS}** | **12 Nov 2026** |

**Detailed item specifications**

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/a46450-label-printer-tray#specifications

## 01 Product description and specification

| | |
|---|---|
| **Product description** | Fully-welded Grade 304 stainless steel label printer tray with rear mounting holes and an obround cable cutout. Available in 2mm and 1.5mm thickness. |
| **Short Form Specification** | **SPECIFICATION USE**<br>Use this description when specifying this product range.<br><br>Label Printer Tray Stainless Steel Grade 304 2mm or 1.5mm Thickness 260mm (L) x 140mm (W) x 120mm (H) with Fully-Welded Construction, 30mm Deep Tray, 2 x Ø6mm Rear Mounting Holes on 90mm Centres and 50mm x 30mm Obround Cable Cutout |

## 02 Technical specifications

| PARAMETER | VALUE | UNIT | TECHNICAL NOTE |
|---|---|---|---|
| **Construction** | Fully-Welded | – | Fully-welded label printer tray with raised tray edges and an upright rear mounting plate. |
| **Mounting Hole Diameter** | 6 | mm | Diameter of each of the two holes in the rear mounting plate. |
| **Bracket Mounting Hole Pitch** | 90 | mm | Centre-to-centre spacing of the two rear mounting holes. |

## 03 Configuration options

| | |
|---|---|
| **Material Thickness** | 1.5 mm; 2 mm |

Options vary by model; not every combination is available. Use the product page to select a model.


121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

## 04 Functional features

**01 Grade 304 Stainless Steel**
Fully-welded stainless steel construction for a dedicated label printer support tray.

**02 Two Material Thicknesses**
Choose 2mm or 1.5mm material thickness with the same 260mm x 140mm x 120mm overall dimensions.

**03 30mm Deep Tray**
Raised tray edges provide a 30mm deep tray below the 120mm-high rear mounting plate.

**04 Rear Mounting Holes**
Two Ø6mm holes on 90mm centres. Hole centres are 25mm from the side edges and 90mm above the base.

**05 Obround Cable Cutout**
A 50mm x 30mm cutout with R15 ends routes cables through the tray base. Its centreline is 32mm from the inside face of the rear plate.

**06 Radiused Rear Plate Corners**
R2 upper rear-plate corners are shown on the general arrangement drawings supplied with the specification sheets.

## 05 Application information

| | |
|---|---|
| **Intended applications** | Pharmaceutical Support Areas, Processing & Production |
| **Industries** | Cannabis, Pharmaceutical Manufacturing |

## 06 Supply and support

| | |
|---|---|
| **Typical lead time** | 10–15 working days |
| **Warranty** | 12 months |

## 07 Frequently asked questions

**What is this tray used for?**
It provides a dedicated support tray for a label printer at pharmaceutical and cannabis production labelling stations. The product is the stainless steel tray; a printer is not included.

**What material and thickness options are available?**
Both versions are fully welded in Grade 304 stainless steel. Choose 2mm or 1.5mm material thickness. The external dimensions and mounting layout are the same for both versions.


**What are the dimensions, and will my printer fit?**
Overall dimensions are 260mm (L) x 140mm (W) x 120mm (H), with a 30mm deep tray. These are external dimensions. Check your printer footprint, cable connections and operating clearances against the drawings before ordering.

**How is the tray mounted?**
The rear plate has two Ø6mm mounting holes on 90mm centres. Each hole centre is 25mm from its nearest side edge and 90mm above the base. Select fixings and a mounting surface appropriate to the installation and printer weight.


**What provision is made for printer cables?**
The tray base has a 50mm x 30mm obround cable cutout with R15 ends. The cutout centreline is 32mm from the inside face of the rear plate.

**Are drawings and specification sheets available?**
Yes. Download the product specification sheet or select a thickness to download its item specification sheet. The sheets include the product image and front, top, right and isometric general arrangement drawings.

## Product drawings and images

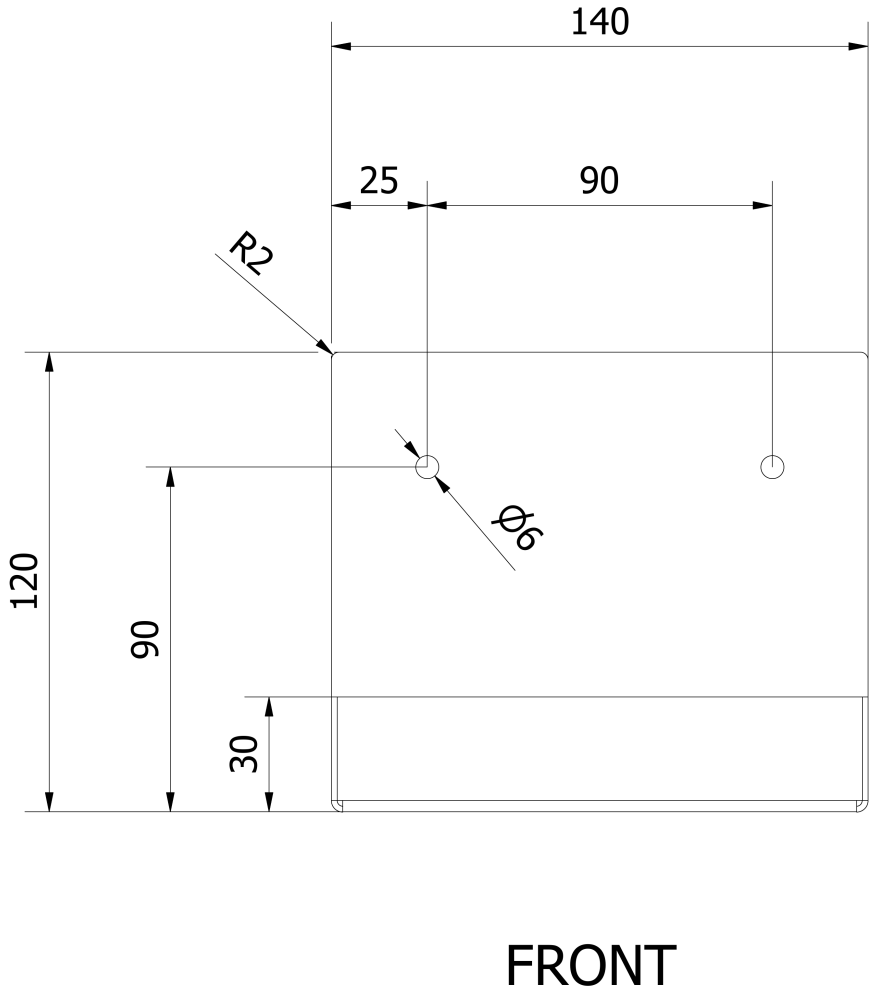


**FRONT VIEW** · Front elevation - A46450

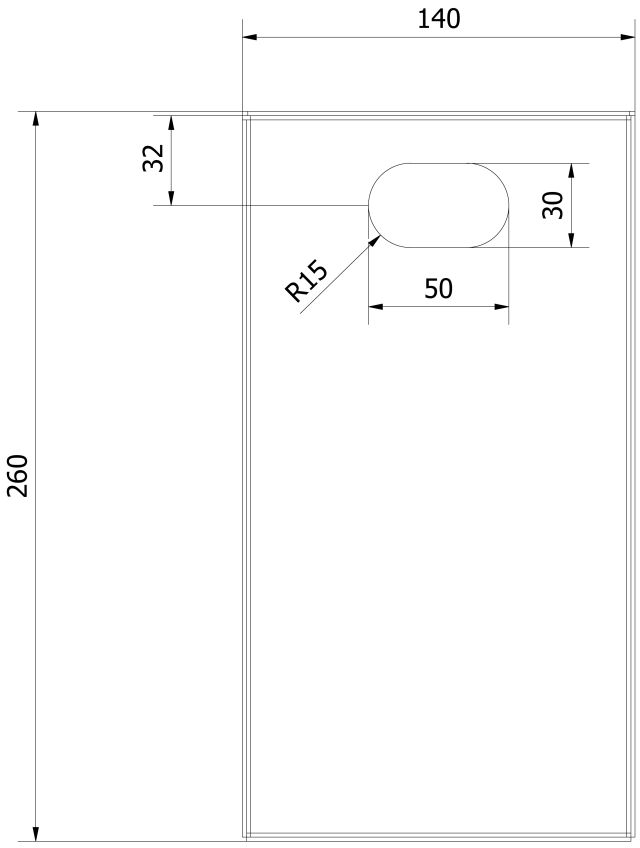



TOP

**TOP VIEW** · Top view - A46450




# RIGHT

**RIGHT VIEW** · Right elevation – A46450

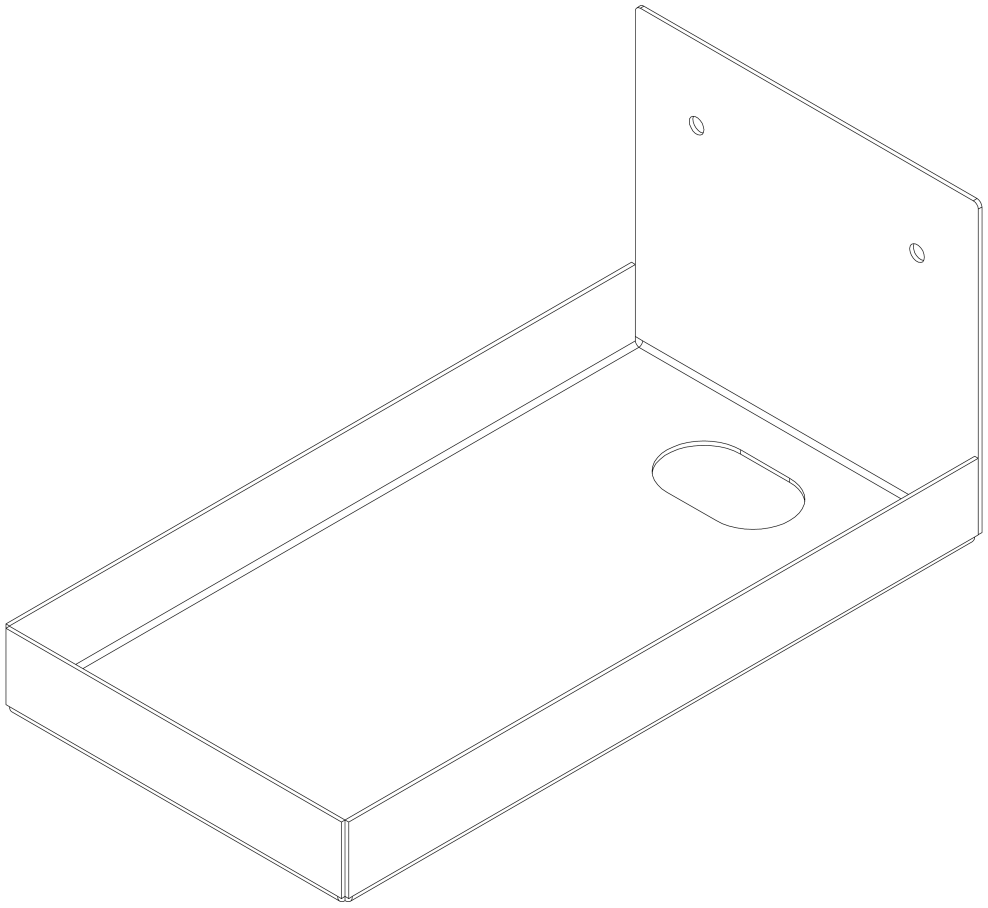

# TOP RIGHT

**ISOMETRIC VIEW** · Top-right isometric view - A46450

E&OE. Specifications are subject to change without notice.


121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357