

PRODUCT RANGE SPECIFICATION

A66210 – Stainless Steel Mixing Paddle Flat Face

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE A66210{PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	Grade 304 stainless steel mixing paddle with a flat, square-edged face for stirring and mixing ingredients in food processing vessels. The sharp, defined edges allow for precise mixing, stirring, and folding of ingredients, ensuring a thorough and even consistency. Choose between solid or perforated face designs for different mixing needs—solid for denser mixtures and perforated for reducing resistance in liquid mixing. With two available lengths (900 mm and 1200 mm), this paddle provides excellent reach for deep containers and large batches.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield A66210. Stainless Steel Mixing Paddle Flat Face. Length: 900 mm, 1200 mm. Face Style: Perforated, Solid. With two available lengths (900 mm and 1200 mm), this paddle provides excellent reach for deep containers and large batches.

02 Models and configurations

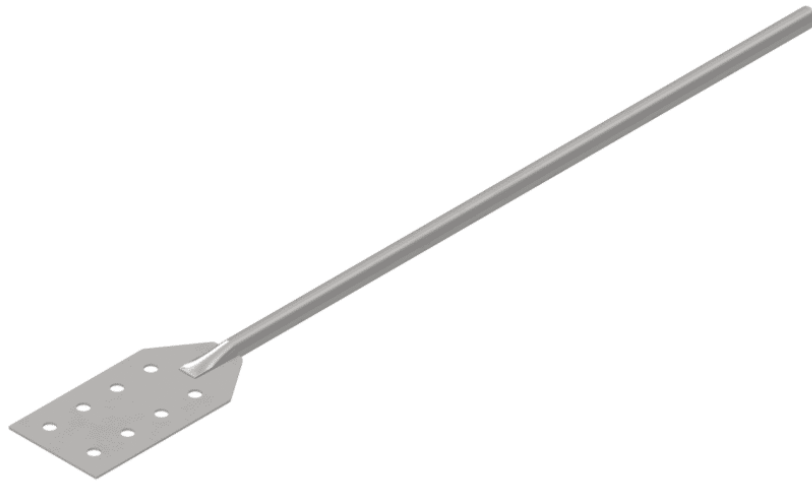
MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
A66210(P-0900)	Mixing Paddle Stainless Steel Grade 304 Square	Face Style: Perforated Length: 900 mm
A66210(P-1200)	A66210(P-1200) Stainless Steel Mixing Paddle Square Face with Perforations 1200mm Length Face Style: Perforated. Length: 1200.	Face Style: Perforated Length: 1200 mm
A66210(S-0900)	Mixing Paddle Stainless Steel Grade 304 Square Face 900mm (L) x 210mm (W) x 105mm (H)	Face Style: Solid Length: 900 mm
A66210(S-1200)	A66210(S-1200) Stainless Steel Mixing Paddle Square Face 1200mm Length Face Style: Solid. Length: 1200.	Face Style: Solid Length: 1200 mm

03 Application information

Intended applications	Mixing & Agitation
Industries	Food & Beverage Processing, Foodservice & Catering

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images**PRODUCT IMAGE**

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.