
MODEL SPECIFICATION

B17635(N) – Squat Pan with Integral Rim - No Trap



PRODUCT IMAGE

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Model	B17635(N){PSS}	14 Nov 2026

01 Model specification

Grade 304 Stainless Steel Squat Pan with Integral Flushing Rim and No Integral Trap.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Trap Type	Without Integral Trap	–	–

03 Model and supply data

Parent product	B17635 — Squat Pans
Typical lead time	10–15 working days
Warranty	12 months

04 Specification notes

Configuration description

Floor-mounted squat pan with an integral flushing rim for public and institutional toilet installations.

Selected configuration: Trap Type: Without Intergral Trap.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this model.

Basterfield B17635N. Floor-mounted squat pan with an integral flushing rim for public and institutional toilet installations. Selected configuration: Trap Type: Without Intergral Trap.

Detailed specification

- Model: B17635N
- Trap Type: Without Intergral Trap

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

05 Frequently asked questions

How is the squat pan installed?

Build the pan into a prepared floor recess, with the footplate at finished floor level. Coordinate support, waterproofing, finished floor levels and pipe connections before closing the floor.

What are the dimensions of B17635(PB)?

The top measures 595 mm (L) × 635 mm (W). Overall height is 311 mm. The overall extent including inlet and outlet projections is 701 mm.

What is the waste outlet size?

B17635(PB) has a Ø102 mm waste outlet for connection to Ø110 mm soil sewerage systems. Use a connector suitable for the pan outlet and the selected soil pipe system.

Which flush inlet does B17635(PB) use?

The flush inlet enters from the rear and is tapered to accept a suitable bung. Match the bung and flush pipe to the selected flushing arrangement.

Which trap configurations are available?

B17635(PB) has an integral P-trap. B17635S is the S-trap model and B17635N is supplied without an integral trap. Select the configuration to suit the drainage layout; the attached dimensioned drawings show B17635(PB).

What material is the pan made from?

The squat pan is manufactured from Grade 304 stainless steel, with an integral flushing rim and textured foot positions.


Where can the squat pan be used?

Typical applications include public toilets, schools and university ablutions, correctional facilities, mining and industrial ablution blocks, and institutional washrooms where a squatting toilet is specified.


Which model code should I specify for the P-trap pan?

Specify Basterfield B17635(PB) for the Grade 304 stainless steel squat pan with an integral P-trap and a rear-entry tapered flush inlet suitable for bungs.


Product drawings and images

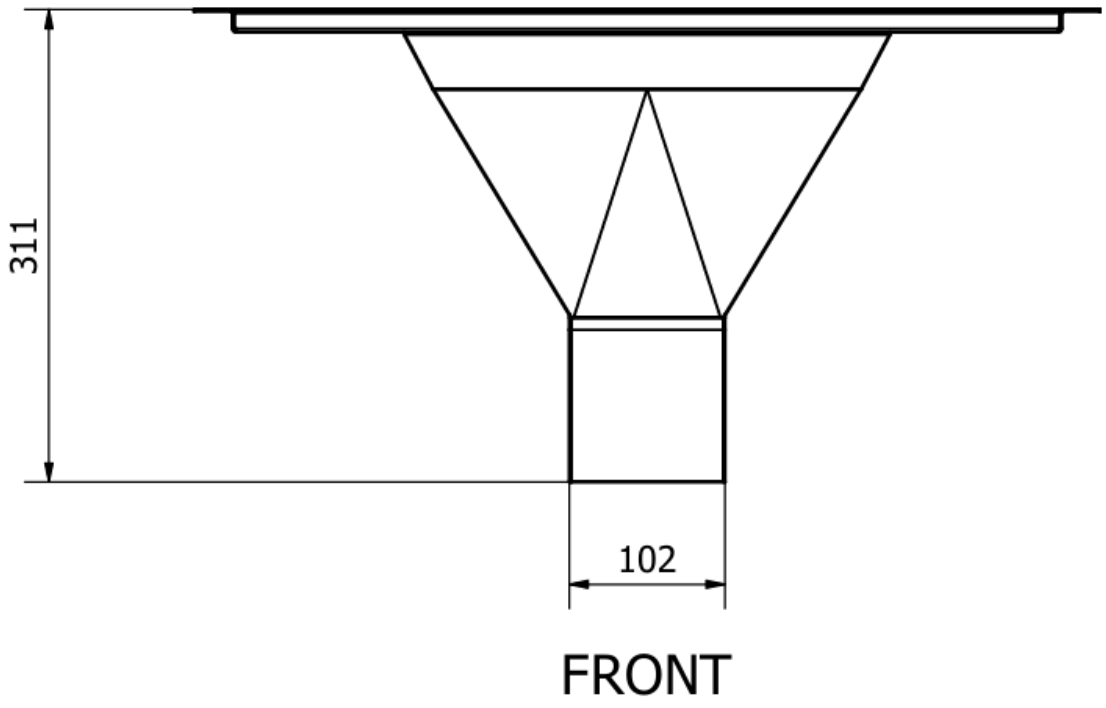


FRONT VIEW · B17635(PB) only — front view (dimensions in mm)

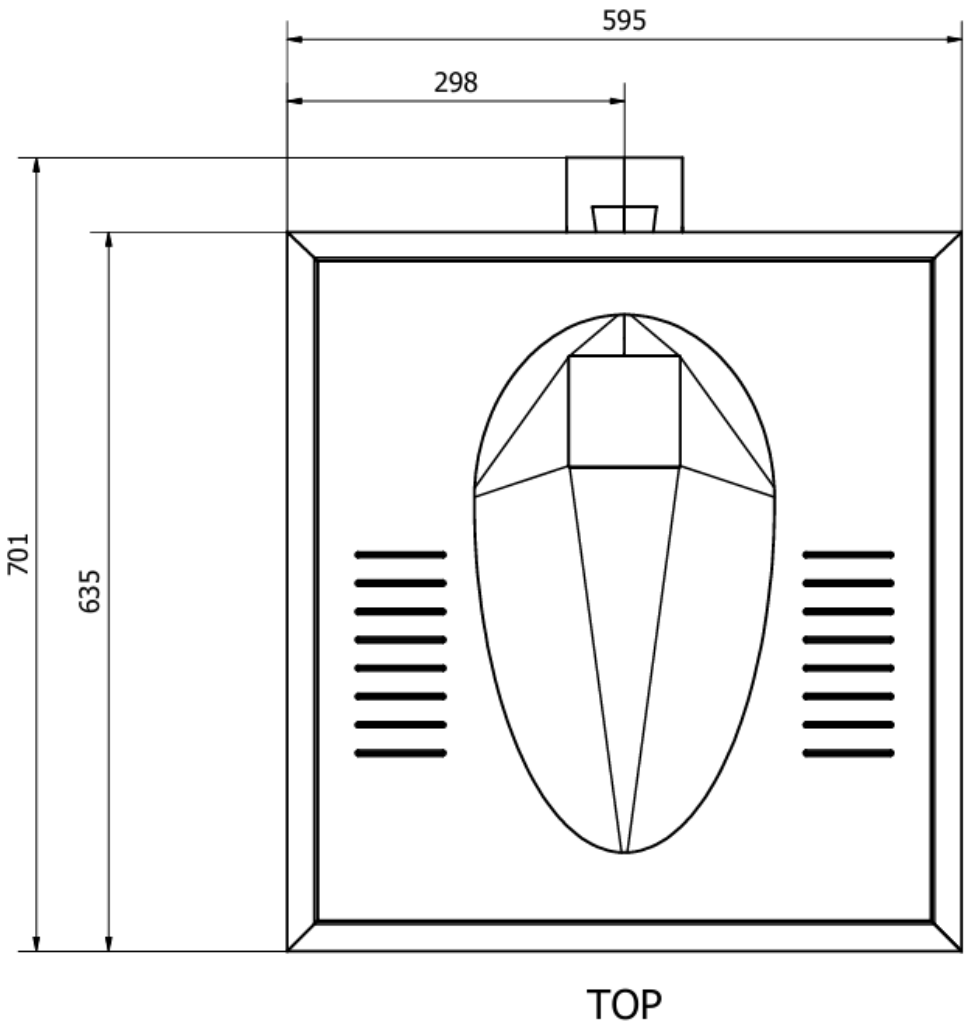

TOP VIEW · B17635(PB) only — top view (dimensions in mm)

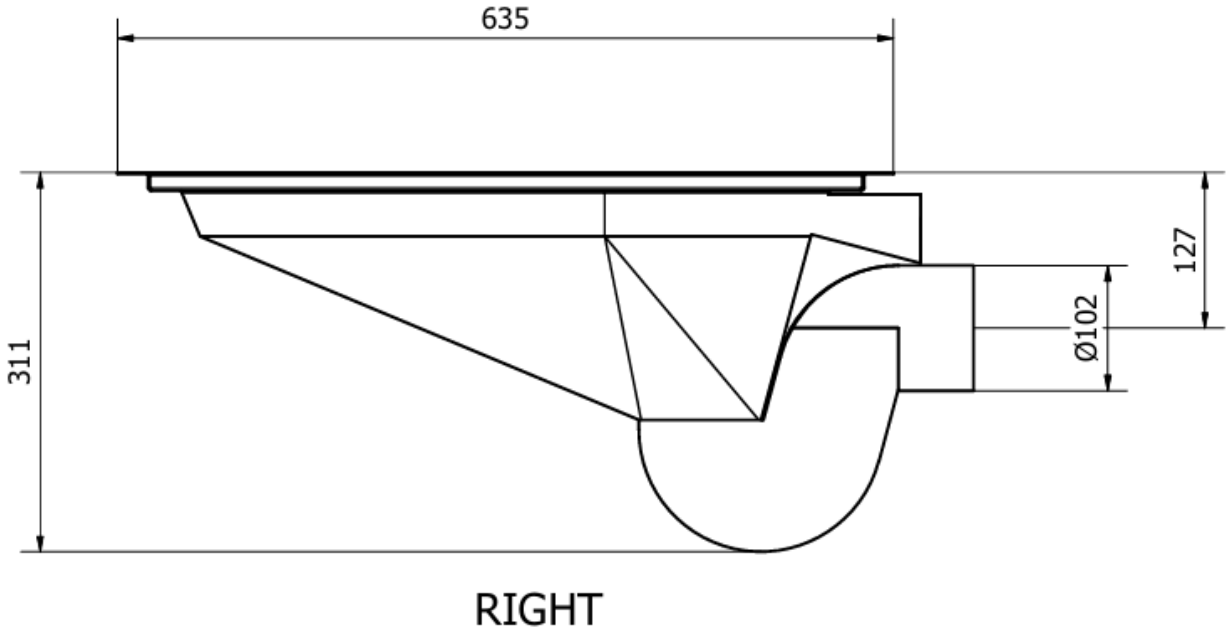

RIGHT VIEW · B17635(PB) only — right view (dimensions in mm)

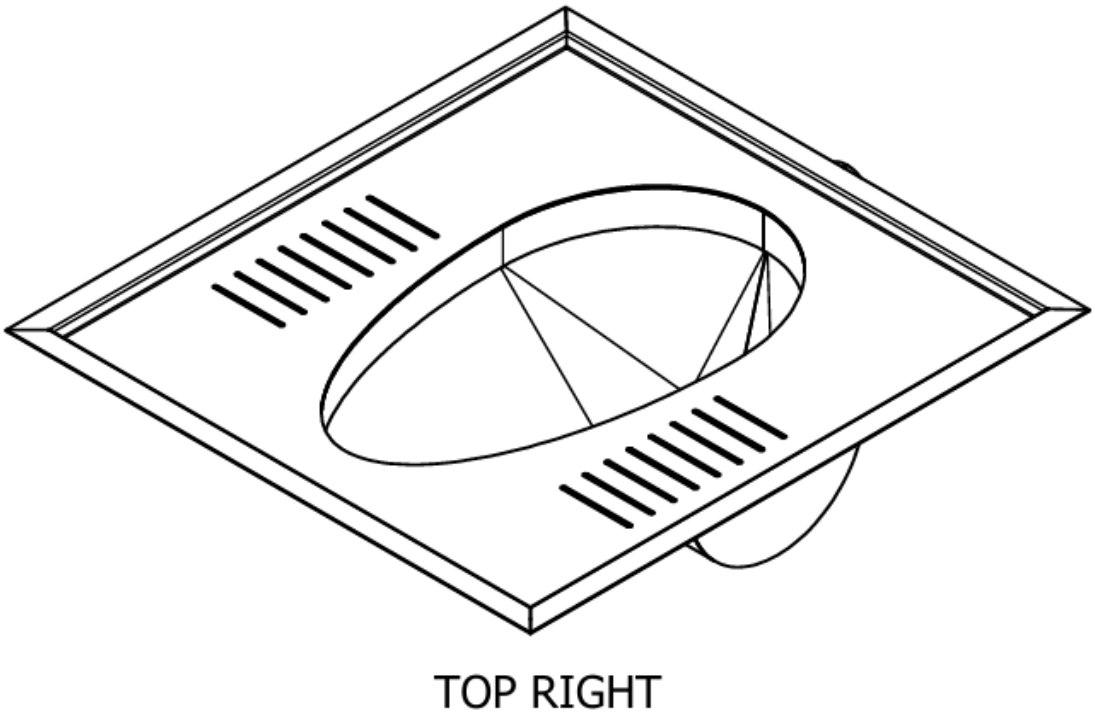

ISOMETRIC VIEW · B17635(PB) only — top-right view

E&OE. Specifications are subject to change without notice.