

MODEL SPECIFICATION

B17635(PB) – Grade 304 Stainless Steel Squat Pan with Integral Flushing Rim, Rear-Entry Tapered Flush Inlet Suitable for Bungs, and Integral P-Trap.



PRODUCT IMAGE

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Model	B17635(PB){PSS}	Published catalogue data	5 Oct 2026

01 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Trap Type	P-Trap	–	–
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Length	595	mm	Length of the top; excludes pipe projections.
Width	635	mm	Width of the top; overall extent including inlet and outlet projections is 701 mm.
Height	311	mm	Overall height of 311 mm.
Waste Outlet Diameter	102	mm	For connection to Ø110 mm soil sewerage systems using a suitable connector.
Mounting Type	Recessed into floor	–	Built into the floor, with the footplate at finished floor level.
Flushing Inlet Orientation	Rear entry	–	Tapered flush inlet suitable for bungs.

02 Dimensions and mass

PARAMETER	VALUE	UNIT
Length	595	mm
Width	635	mm
Overall height	311	mm

03 Model and supply data


Parent product	B17635 – Squat Pans
----------------	---------------------

Typical lead time	10–15 working days
Warranty	12 months


04 Specification notes

Configuration description	B17635(PB) is a Grade 304 stainless steel squat pan with an integral P-trap, flushing rim and textured foot positions. It has a rear-entry tapered flush inlet suitable for bungs and a Ø102 mm waste outlet for connection to Ø110 mm soil sewerage systems using a suitable connector. The top measures 595 mm (L) × 635 mm (W), with an overall height of 311 mm. The overall extent including inlet and outlet projections is 701 mm. Recess the pan into a prepared floor opening, with the footplate flush with the finished floor level. Coordinate floor support, waterproofing, flush pipework and drainage connections before installation. Specify model B17635(PB) when ordering or scheduling this P-trap configuration.
Short Form Specification	SPECIFICATION USE Use this description when specifying this model. Specify Basterfield B17635(PB), a Grade 304 stainless steel squat pan with an integral flushing rim, textured foot positions and integral P-trap. The pan has a rear-entry tapered flush inlet suitable for bungs and a Ø102 mm waste outlet for connection to a Ø110 mm soil sewerage system using a suitable connector. Top dimensions: 595 mm (L) × 635 mm (W); overall height: 311 mm. Overall extent including inlet and outlet projections: 701 mm. Recess the pan into the floor with the footplate flush with the finished floor level. Coordinate floor support, waterproofing, flush pipework and drainage connections before installation.
Detailed specification	• Model: B17635(PB) • Material: Stainless Steel Grade 304 • Installation: Recessed into the floor; footplate flush with finished floor level • Flushing: Integral flushing rim • Flush inlet: Rear-entry tapered inlet suitable for bungs • Trap: Integral P-trap • Waste outlet: Ø102 mm diameter • Soil sewerage connection: Ø110 mm system using a suitable connector • Top dimensions: 595 mm (L) × 635 mm (W) • Overall extent including inlet and outlet projections: 701 mm • Overall height: 311 mm • Foot positions: Textured tread features


Product drawings and images

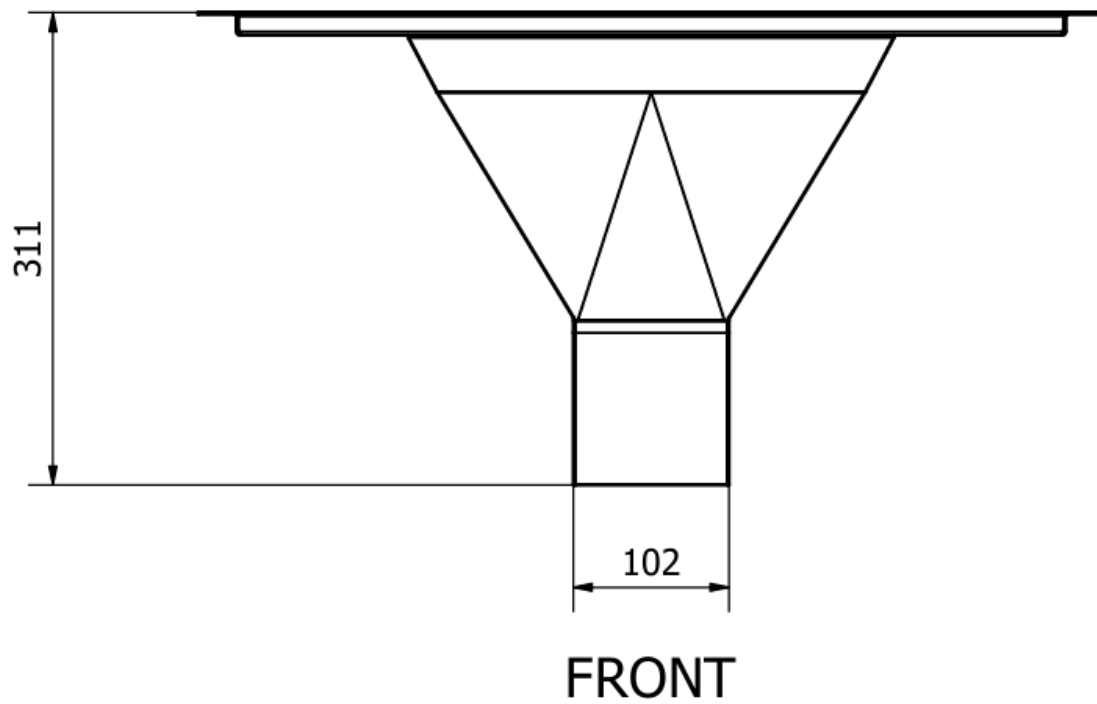

FRONT VIEW · B17635(PB) only – front view (dimensions in mm)

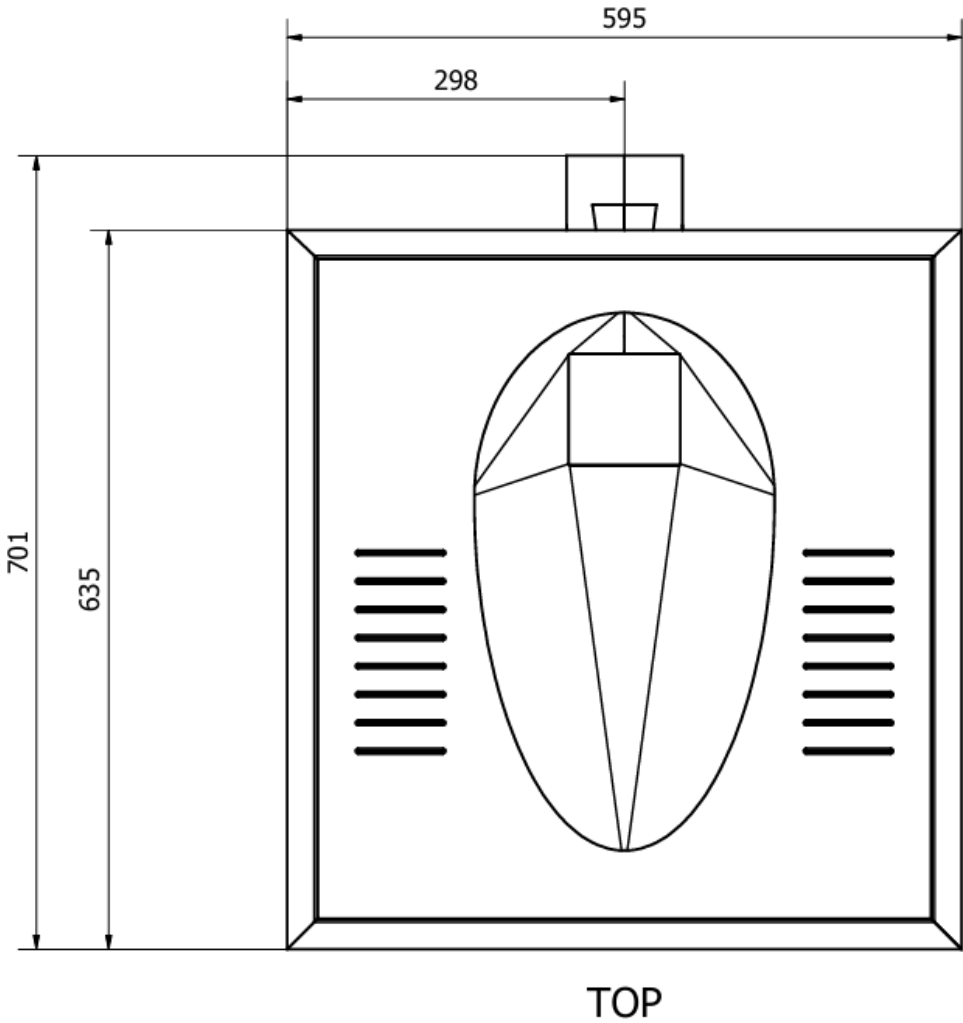


TOP VIEW · B17635(PB) only – top view (dimensions in mm)

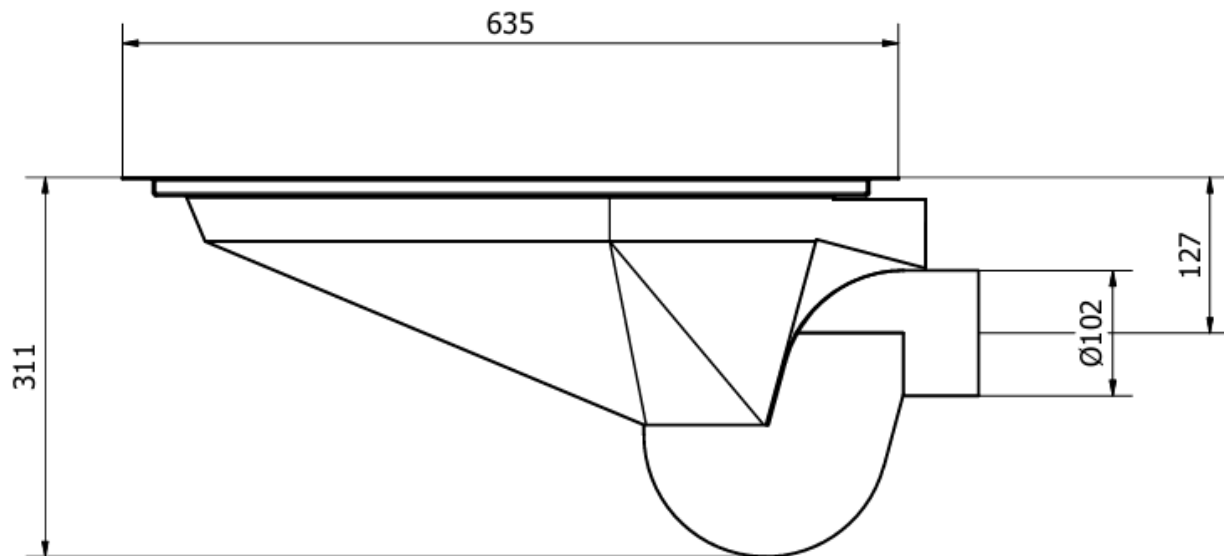

RIGHT

RIGHT VIEW · B17635(PB) only – right view (dimensions in mm)

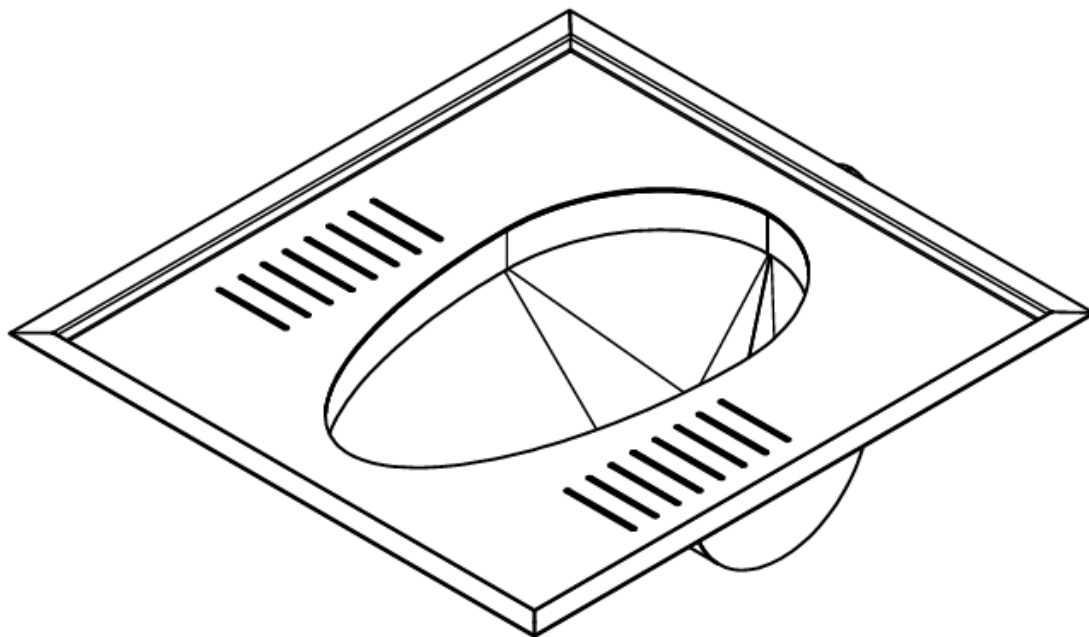

TOP RIGHT

ISOMETRIC VIEW · B17635(PB) only – top-right view

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.