

PRODUCT RANGE SPECIFICATION

B17635 – Squat Pans



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

|                |                    |                          |              |
|----------------|--------------------|--------------------------|--------------|
| DOCUMENT SCOPE | DOCUMENT REFERENCE | DATA STATUS              | GENERATED ON |
| Product range  | B17635{PSS}        | Published catalogue data | 5 Oct 2026   |

01 Product description and specification

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product description      | <p>The Basterfield B17635 range comprises Grade 304 stainless steel squat pans with an integral flushing rim and textured foot positions. The pan is designed to be built into a floor recess, with the footplate at finished floor level. It provides a squatting toilet option for communal and institutional ablutions.</p> <p>The current B17635(PB) model incorporates an integral P-trap and a rear-entry tapered flush inlet suitable for bungs. Its Ø102 mm waste outlet connects to Ø110 mm soil sewerage systems using a suitable connector. The top measures 595 mm (L) × 635 mm (W). Overall height is 311 mm. The overall extent including inlet and outlet projections is 701 mm.</p> <p>Typical applications include public restrooms, school and university ablutions, correctional facilities, mining and industrial ablution blocks, and institutional washrooms. The stainless steel surfaces and accessible footplate support routine cleaning as part of the surrounding floor area.</p> <p>Select the trap arrangement to suit the drainage layout: B17635(PB) with an integral P-trap, B17635S with an S-trap, or B17635N without an integral trap. Coordinate the flush pipe, bung, drainage connector, floor support and waterproofing with the installation design.</p> |
| Short Form Specification | <div><div>SPECIFICATION USE</div><p>Use this description when specifying this product range.</p><p>Specify Basterfield B17635(PB), a Grade 304 stainless steel squat pan with an integral flushing rim, textured foot positions and integral P-trap. The pan has a rear-entry tapered flush inlet suitable for bungs and a Ø102 mm waste outlet for connection to a Ø110 mm soil sewerage system using a suitable connector. Top dimensions: 595 mm (L) × 635 mm (W); overall height: 311 mm. Overall extent including inlet and outlet projections: 701 mm. Recess the pan into the floor with the footplate flush with the finished floor level. Coordinate floor support, waterproofing, flush pipework and drainage connections before installation.</p></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

02 Technical specifications

| PARAMETER | VALUE                     | UNIT | TECHNICAL NOTE                                                                                                              |
|-----------|---------------------------|------|-----------------------------------------------------------------------------------------------------------------------------|
| Material  | Stainless Steel Grade 304 | —    | The primary material used in the construction of the item. Certain components may be manufactured from different materials. |

03 Models and configurations

| MODEL      | DESCRIPTION                                                                                                                             | PUBLISHED CONFIGURATION                                                 |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| B17635(N)  | Grade 304 Stainless Steel Squat Pan with Integral Flushing Rim and No Integral Trap.                                                    | Trap Type: Without Integral Trap                                        |
| B17635(PB) | Grade 304 Stainless Steel Squat Pan with Integral Flushing Rim, Rear-Entry Tapered Flush Inlet Suitable for Bungs, and Integral P-Trap. | Trap Type: P-Trap<br>Overall dimensions: 595 × 635 × 311 mm (L × W × H) |
| B17635(S)  | Grade 304 Stainless Steel Squat Pan with Integral Flushing Rim and S-Trap.                                                              | Trap Type: S-Trap                                                       |

04 Functional features

|    |                                                                                                                                                  |
|----|--------------------------------------------------------------------------------------------------------------------------------------------------|
| 01 | <b>Grade 304 stainless steel</b><br>Stainless steel construction provides a durable, cleanable pan for communal and institutional ablutions.     |
| 02 | <b>Built into the floor</b><br>The pan is designed to be recessed into the floor, with the footplate at finished floor level.                    |
| 03 | <b>Integral flushing rim</b><br>A built-in rim distributes flushing water around the pan from a rear-entry flush inlet.                          |
| 04 | <b>Textured foot positions</b><br>Raised tread features define the foot positions on either side of the pan.                                     |
| 05 | <b>P-trap with bung inlet</b><br>B17635(PB) combines an integral P-trap with a rear-entry tapered flush inlet suitable for bungs.                |
| 06 | <b>102 mm waste outlet</b><br>The B17635(PB) waste outlet is Ø102 mm for connection to Ø110 mm soil sewerage systems using a suitable connector. |

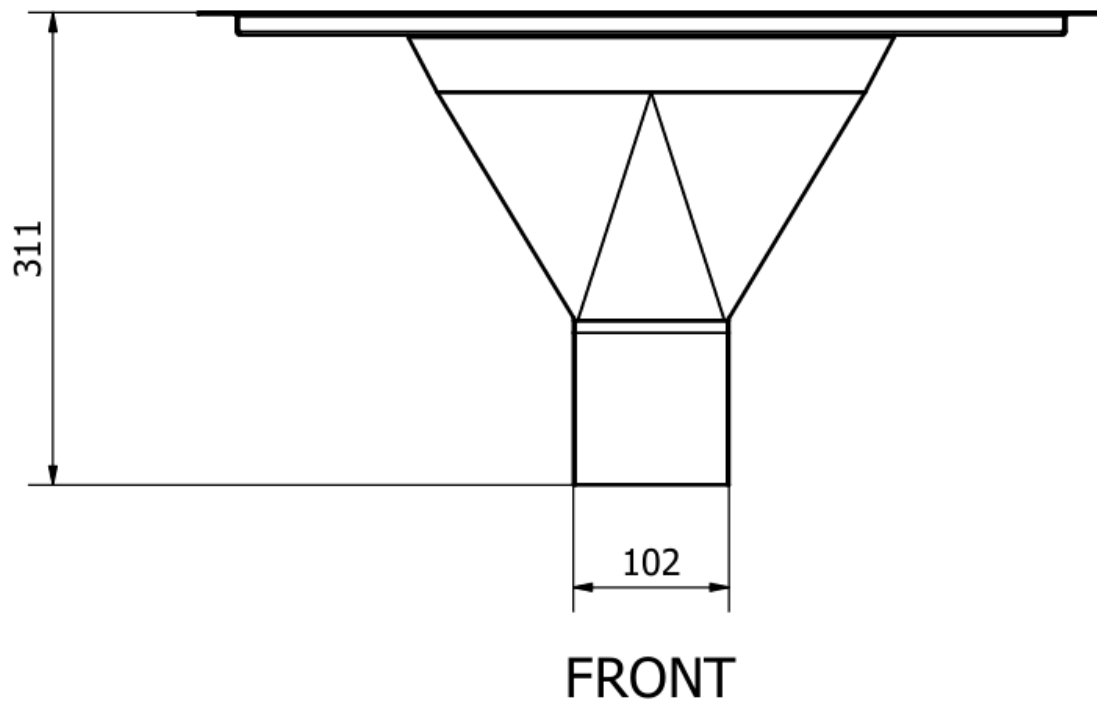
05 Application information

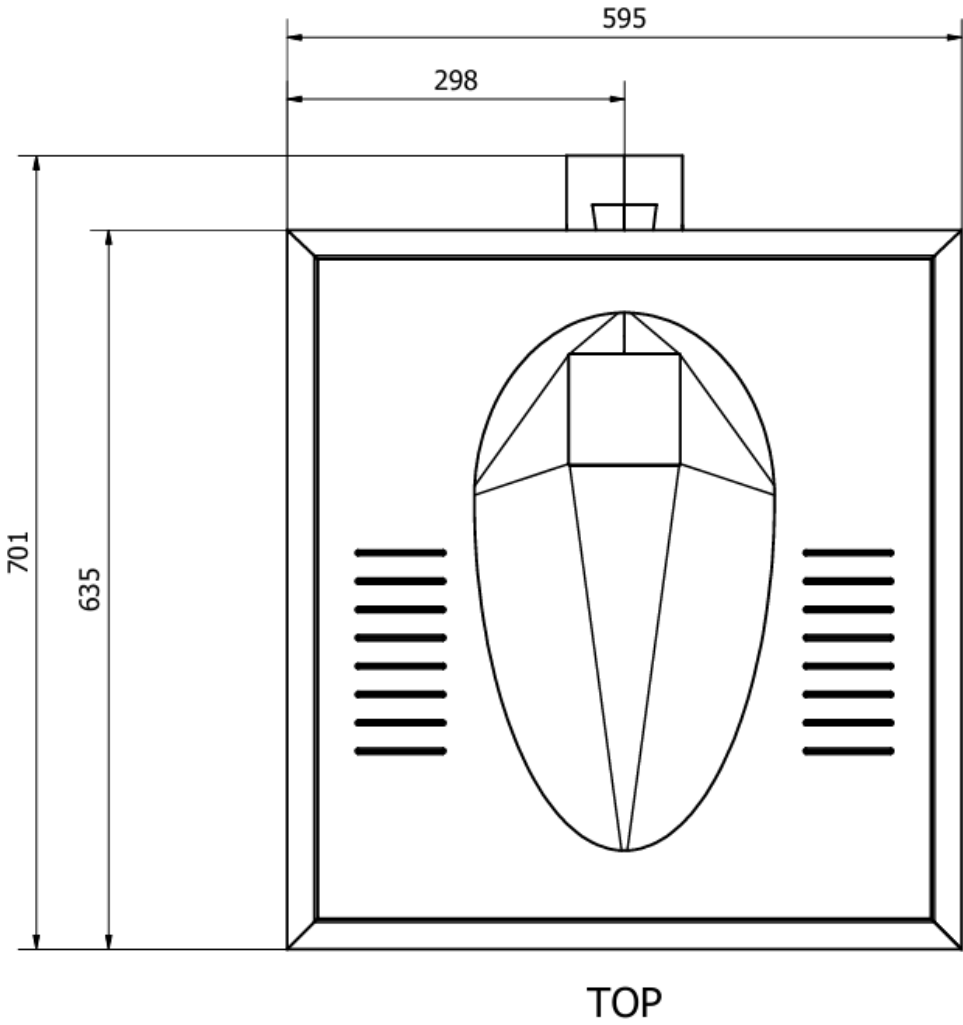
|                       |                                                                                                                                                     |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Intended applications | Public Restrooms, Restrooms & Ablutions, Secure Ablutions                                                                                           |
| Industries            | Colleges & Universities, General Manufacturing, Government & Public Sector, Hospitals & Clinics, Justice & Corrections, Mining & Quarrying, Schools |

06 Supply and support

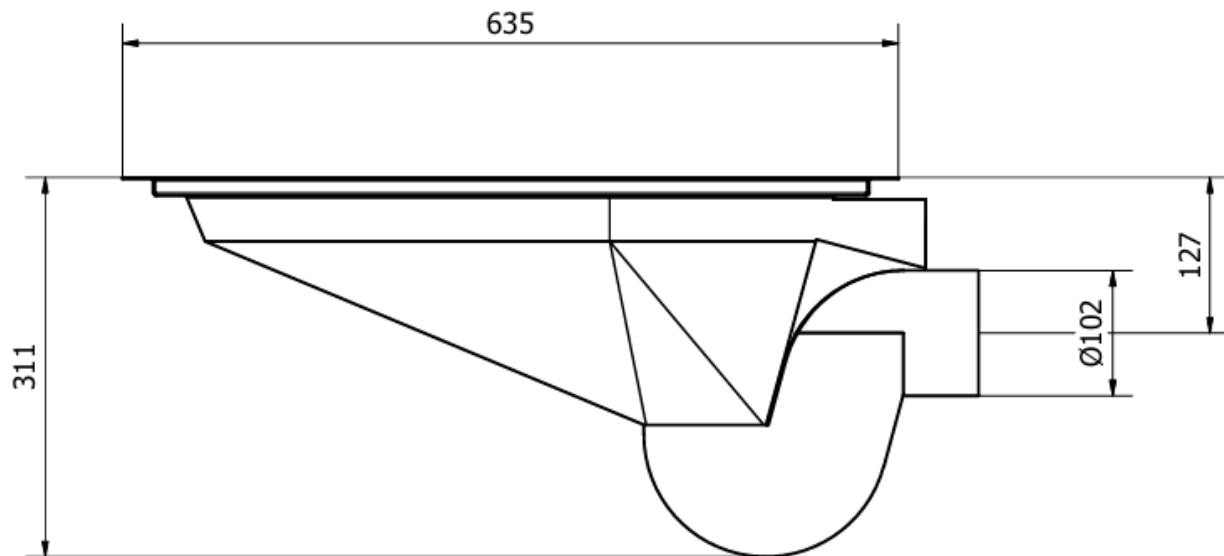
|                   |                    |
|-------------------|--------------------|
| Typical lead time | 10–15 working days |
| Warranty          | 12 months          |

## Product drawings and images

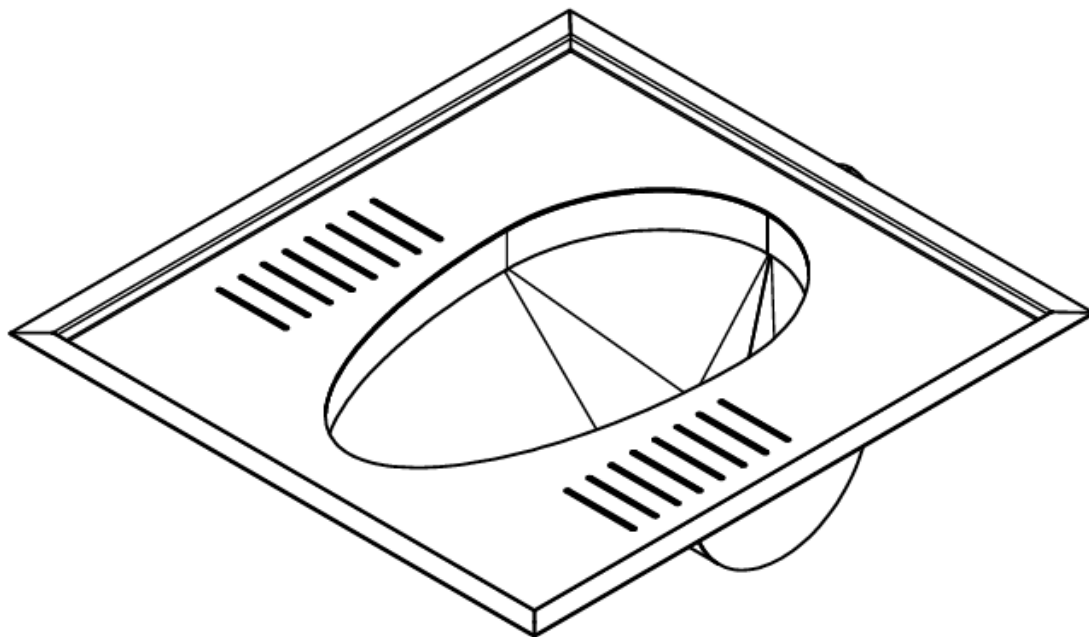
**FRONT VIEW** · B17635(PB) only – front view (dimensions in mm)



TOP VIEW · B17635(PB) only – top view (dimensions in mm)

**RIGHT**

**RIGHT VIEW** · B17635(PB) only – right view (dimensions in mm)

**TOP RIGHT**

**ISOMETRIC VIEW** · B17635(PB) only – top-right view

**VERIFICATION REQUIRED** Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.