PRODUCT RANGE SPECIFICATION

B17635 – Squat Pans



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B17635{PSS}	14 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b17635-squat-pans#specifications

01 Product description and specification

Product description

Grade 304 stainless steel squat pan designed to be built into the floor, with an integral flushing rim and textured foot positions. The B17635(PB) P-trap model has a rear-entry tapered inlet suitable for bungs and a Ø102 mm waste outlet for Ø110 mm soil sewerage systems. Its top measures 595 × 635 mm, with overall height of 311 mm. For public, educational, correctional and industrial ablutions where a squatting toilet is specified.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Specify Basterfield B17635(PB), a Grade 304 stainless steel squat pan with an integral flushing rim, textured foot positions and integral P-trap. The pan has a rear-entry tapered flush inlet suitable for bungs and a Ø102 mm waste outlet for connection to a Ø110 mm soil sewerage system using a suitable connector. Top dimensions: 595 mm (L) × 635 mm (W); overall height: 311 mm. Overall extent including inlet and outlet projections: 701 mm. Recess the pan into the floor with the footplate flush with the finished floor level. Coordinate floor support, waterproofing, flush pipework and drainage connections before installation.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.

03 Configuration options

Trap Type	P-Trap; S-Trap; Without Integral Trap

Options vary by model; not every combination is available. Use the product page to select a model.

04 Functional features

01 Grade 304 stainless steel
Stainless steel construction provides a durable, cleanable pan for communal and institutional ablutions.

02 Built into the floor
The pan is designed to be recessed into the floor, with the footplate at finished floor level.

03 Integral flushing rim
A built-in rim distributes flushing water around the pan from a rear-entry flush inlet.

04 Textured foot positions
Raised tread features define the foot positions on either side of the pan.

05 P-trap with bung inlet
B17635(PB) combines an integral P-trap with a rear-entry tapered flush inlet suitable for bungs.

06 102 mm waste outlet
The B17635(PB) waste outlet is Ø102 mm for connection to Ø110 mm soil sewerage systems using a suitable connector.

05 Application information

Intended applications	Public Restrooms, Restrooms & Ablutions, Secure Ablutions
Industries	Colleges & Universities, General Manufacturing, Government & Public Sector, Hospitals & Clinics, Mining & Quarrying, Prisons & Detention Facilities, Schools

06 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

07 Frequently asked questions

How is the squat pan installed?
Build the pan into a prepared floor recess, with the footplate at finished floor level. Coordinate support, waterproofing, finished floor levels and pipe connections before closing the floor.

What are the dimensions of B17635(PB)?
The top measures 595 mm (L) × 635 mm (W). Overall height is 311 mm. The overall extent including inlet and outlet projections is 701 mm.

What is the waste outlet size?
B17635(PB) has a Ø102 mm waste outlet for connection to Ø110 mm soil sewerage systems. Use a connector suitable for the pan outlet and the selected soil pipe system.

Which flush inlet does B17635(PB) use?
The flush inlet enters from the rear and is tapered to accept a suitable bung. Match the bung and flush pipe to the selected flushing arrangement.

Which trap configurations are available?
B17635(PB) has an integral P-trap. B17635S is the S-trap model and B17635N is supplied without an integral trap. Select the configuration to suit the drainage layout; the attached dimensioned drawings show B17635(PB).


What material is the pan made from?
The squat pan is manufactured from Grade 304 stainless steel, with an integral flushing rim and textured foot positions.

Where can the squat pan be used?
Typical applications include public toilets, schools and university ablutions, correctional facilities, mining and industrial ablution blocks, and institutional washrooms where a squatting toilet is specified.


Which model code should I specify for the P-trap pan?

Specify Basterfield B17635(PB) for the Grade 304 stainless steel squat pan with an integral P-trap and a rear-entry tapered flush inlet suitable for bungs.


Product drawings and images

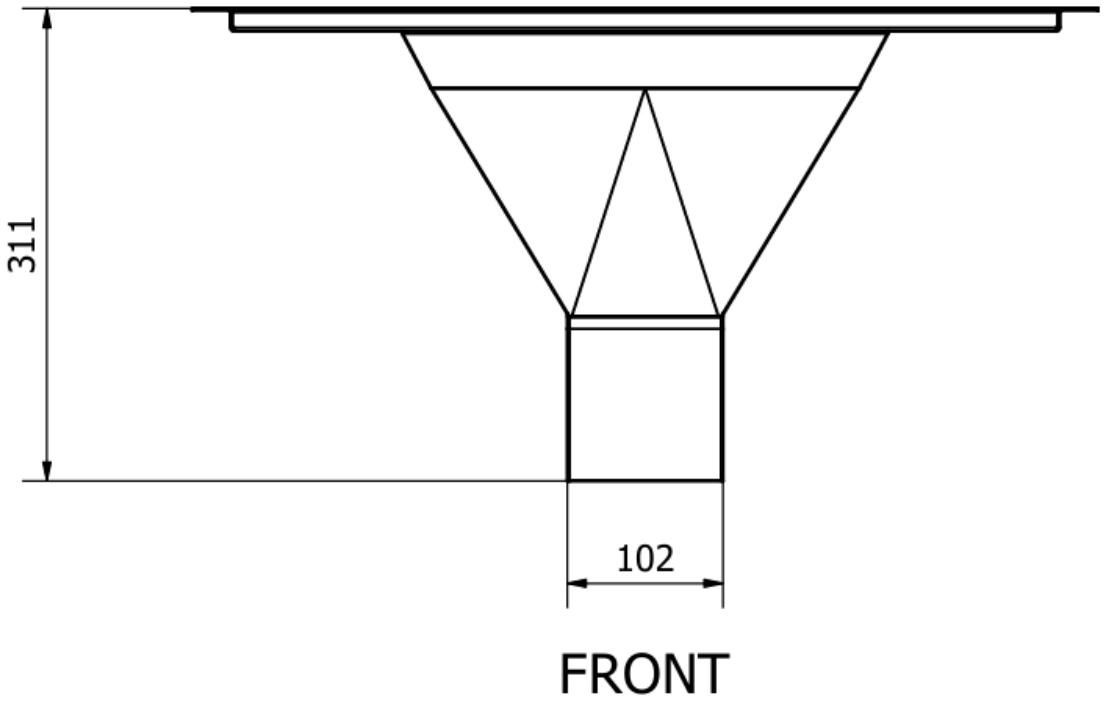


FRONT VIEW · B17635(PB) only — front view (dimensions in mm)

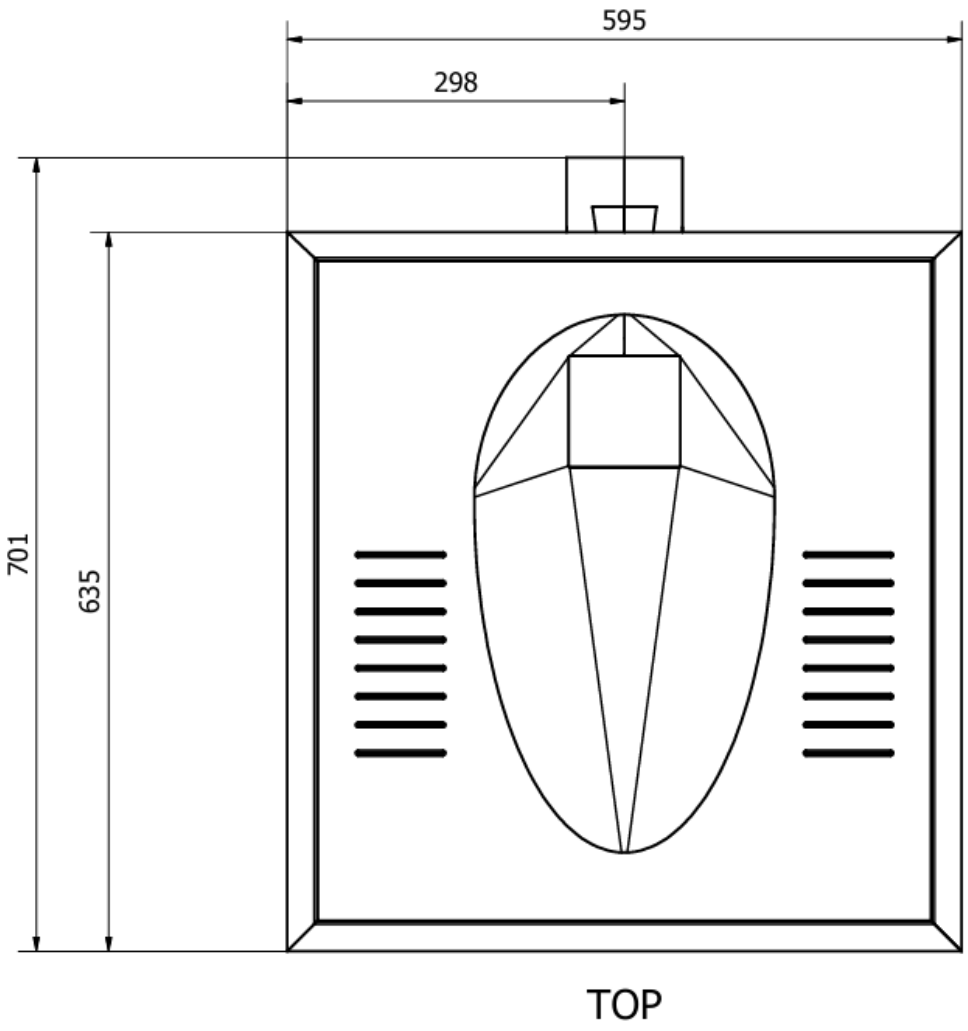

TOP VIEW · B17635(PB) only — top view (dimensions in mm)

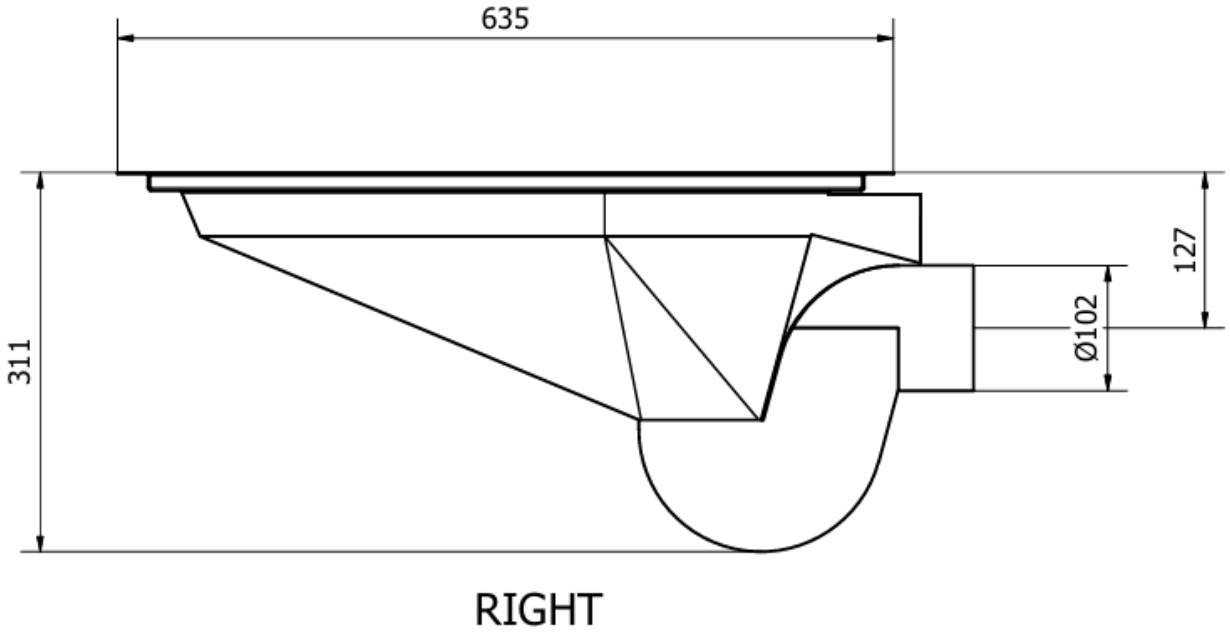

RIGHT VIEW · B17635(PB) only — right view (dimensions in mm)

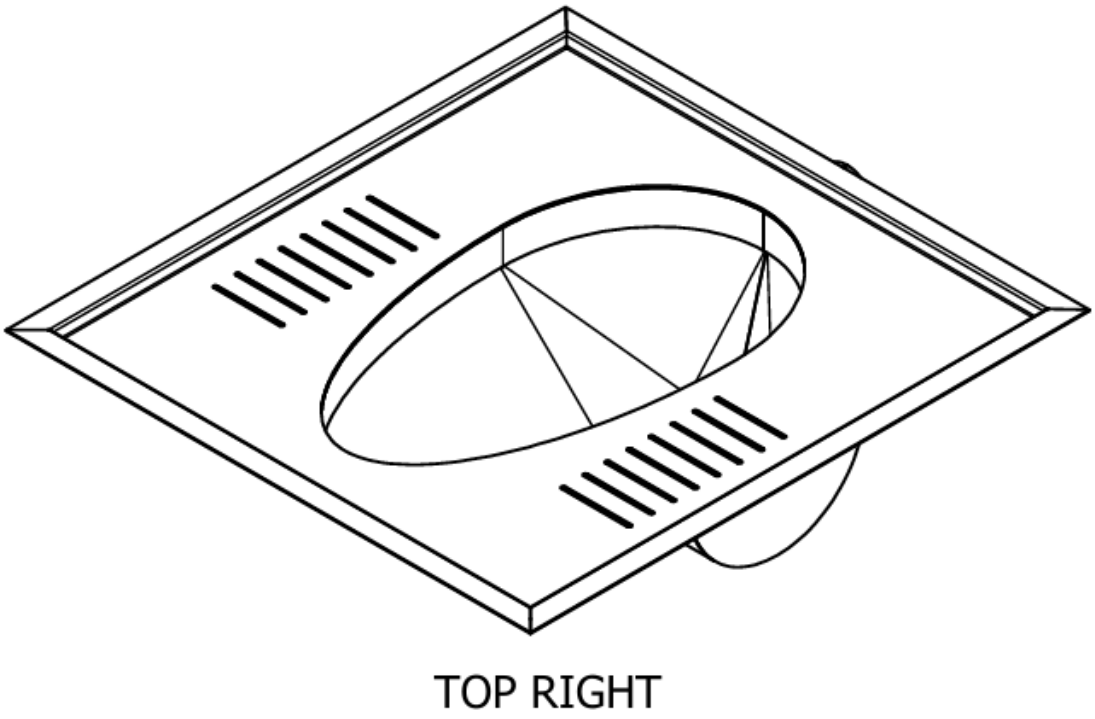

ISOMETRIC VIEW · B17635(PB) only — top-right view

E&OE. Specifications are subject to change without notice.