PRODUCT RANGE SPECIFICATION

B17642 – Stainless Steel Pedestal Toilets



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B17642{PSS}	14 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b17642-stainless-steel-pedestal-toilets#specifications

01 Product description and specification

Product description

Basterfield floor-mounted WC pans in 1.2 mm Grade 304 stainless steel for schools, public and institutional washrooms. B17642(P) has a horizontal P-trap outlet; B17642(S) has a vertical S-trap outlet. Both feature a brushed satin finish, integral flushing rim, back-entry flush inlet and a 102 mm outside-diameter outlet for 110 mm PVC soil pipe. Floor flanges have 6 mm fixing holes. Seat holes are provided; toilet seats and flushing systems must be specified separately.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield B17642 floor-mounted pedestal WC pan in 1.2 mm Grade 304 stainless steel, brushed satin finish. Select B17642(P) for a horizontal P-trap outlet or B17642(S) for a vertical S-trap outlet. Both models have a 102 mm outside-diameter waste outlet for 110 mm PVC soil pipe, an integral flushing rim and a rear-entry flush-pipe inlet. Base flanges have pre-drilled 6 mm fixing holes; standard seat-mounting holes are provided. Toilet seat specified separately. Choose one separately priced flushing system: B17110(L380-CPB) 9 L stainless steel cistern with PVC flush pipe and rubber bung; 04VF_WAL-106B Walcro 106B exposed lever-operated back-entry valve; or 04VF_WAL-103LC Walcro 103LC concealed back-entry valve with VR push button and concealed pipes.

02 Configuration options

Trap Type	P-Trap; S-Trap

Options vary by model; not every combination is available. Use the product page to select a model.

03 Functional features

01 **1.2 mm Grade 304 stainless steel**
Both models use 1.2 mm Grade 304 stainless steel for public and institutional washroom installations.

02 **P-trap and S-trap models**
B17642(P) provides a horizontal outlet; B17642(S) provides a vertical outlet to suit the waste-pipe layout.

03 **102 mm waste outlet**
The 102 mm outside-diameter outlet is suitable for connection to 110 mm PVC soil pipe.

04 **Integral rim with back-entry flushing**
An integral flushing rim and rear-entry flush-pipe inlet allow the selected pan to be paired with a suitable cistern or flush valve.

05 **Floor-fixing flanges**
Pre-drilled 6 mm holes in the base flanges provide the floor-mounting points.

06 **Brushed satin finish**
The brushed satin surface and radiused edges support routine cleaning.

07 **Standard seat-mounting holes**
Seat holes are provided. Specify the toilet seat and flushing system separately when ordering.

04 Application information

Intended applications	Public Restrooms, Secure Ablutions
Industries	Government & Public Sector, Prisons & Detention Facilities, Restaurants & Cafés, Schools

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Frequently asked questions

What is the difference between B17642(P) and B17642(S)?
B17642(P) has a P-trap with a horizontal waste outlet. B17642(S) has an S-trap with a vertical waste outlet. Choose the model that matches the waste-pipe layout for the installation.

What material and thickness are used?
Both models are manufactured from 1.2 mm Grade 304 stainless steel with a brushed satin finish.

What size is the waste outlet?
The waste outlet has an outside diameter of 102 mm and is suitable for connection to 110 mm PVC soil pipe.

How is the pan secured?
The pan is floor mounted using the pre-drilled 6 mm fixing holes in the base flanges. Confirm the fixing arrangement for the installation.

Which flushing systems can be used?
Choose one separately priced flushing system: B17110(L380-CPB) 9 L stainless steel cistern with PVC flush pipe and rubber bung; 04VF_WAL-106B Walcro 106B exposed lever-operated back-entry valve; or 04VF_WAL-103LC Walcro 103LC concealed back-entry valve with VR push button and concealed pipes.

Are the toilet seat and flushing system included?
The listed models are WC pans with seat-mounting holes. Toilet seats and flushing systems are available on request and must be specified separately when ordering.

Where can the B17642 range be used?
The range is intended for public and institutional washrooms, including schools, hospitality venues, public ablutions and correctional facilities.

Where are the pans manufactured?
The B17642 pans are manufactured in South Africa.


Product drawings and images




PRODUCT IMAGE



PRODUCT IMAGE

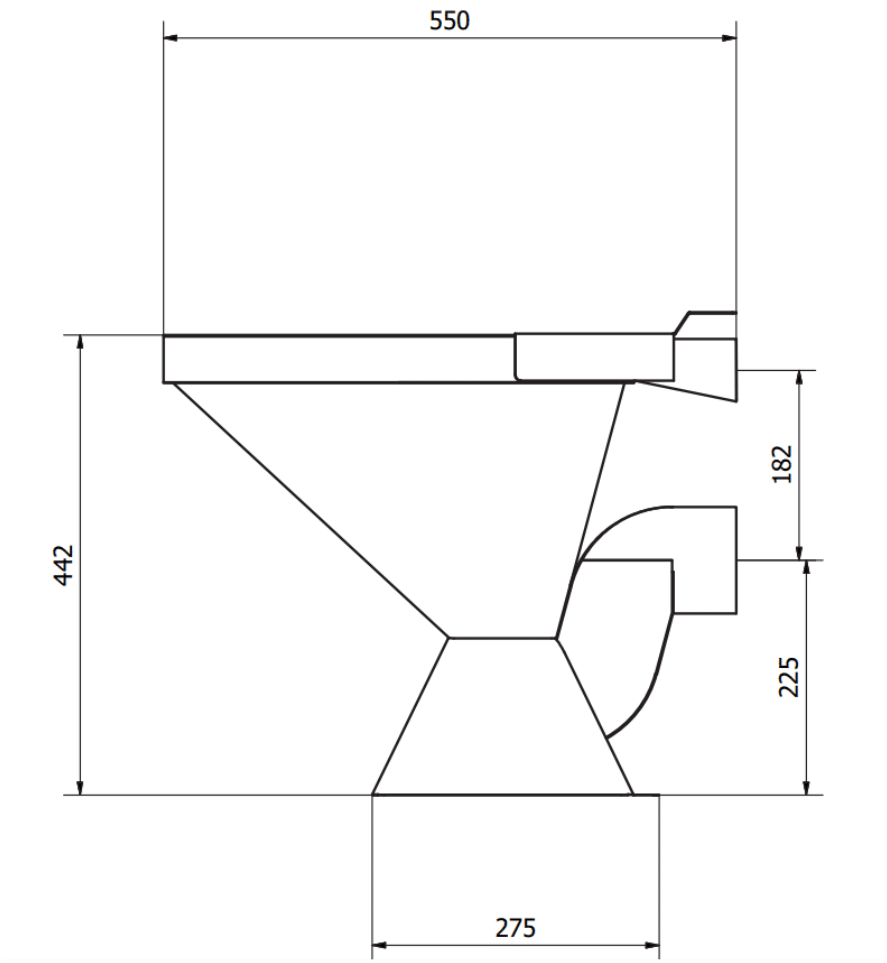

PRODUCT IMAGE

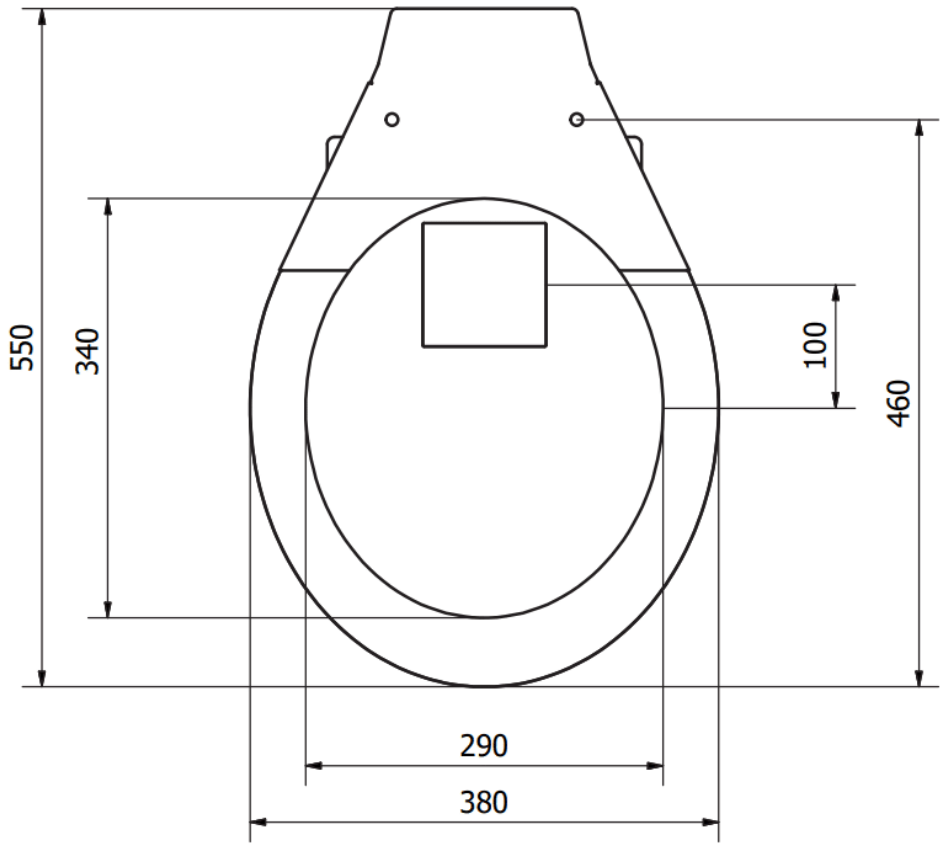

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.