

PRODUCT RANGE SPECIFICATION

B17652 – Stainless Steel Prison Toilet with External Mounting Flanges

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	B17652{PSS}	Published catalogue data	14 Sep 2026

01 Product description and specification

Product description	Shrouded Grade 304 stainless steel toilet pan with external mounting flanges for correctional and other secure washroom installations. Manufactured from heavy-duty Grade 304 stainless steel with 1.2 mm gauge thickness, this one-piece fixture provides exceptional resistance to vandalism and abuse whilst maintaining stringent hygiene standards. This secure WC pan incorporates carefully engineered dimensions of 550 mm (L) from wall to front x 360 mm (W) x 433 mm (H) for standard installations, featuring an integral stainless steel P-trap with 110 mm waste outlet for installation with existing sewerage systems. The integral flushing rim ensures thorough waste removal whilst promoting water conservation. The rear-entry flush pipe inlet accommodates a rubber inlet sealing bung, providing secure and leak-free connections. The unit's versatile design allows operation via either concealed flush valve or concealed cistern, both installed behind the wall to maximise security and simplify maintenance procedures. External flange mounting enables robust fixation to both floor and wall surfaces using anchor bolts, ensuring absolute stability under extreme conditions. Installation flexibility extends to customisable inlet and outlet pipe extensions, available in 250 mm lengths that extend through the wall, with bespoke options available upon request. The unit is supplied without seat mounting holes as standard, maintaining the secure, tamper-resistant design philosophy. For alternative mounting requirements, the B17653 model offers through-the-back installation with internal mounting flanges.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B17652. Stainless Steel Prison Toilet with External Mounting Flanges. Extended Pipes: No, Yes. The rear-entry flush pipe inlet accommodates a rubber inlet sealing bung, providing secure and leak-free connections. Installation flexibility extends to customisable inlet and outlet pipe extensions, available in 250 mm lengths that extend through the wall, with bespoke options available upon request.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17652(P)	Prisons Shrouded Wc Pan With P Trap And External Flange Mounting	Extended Pipes: No
B17652(PE)	Prisons Shrouded Wc Pan P Trap External Flanges And 250mm Long Extended Pipes	Extended Pipes: Yes

03 Application information

Intended applications	Secure Ablutions (Correctional)
-----------------------	---------------------------------

03 Application information

Industries	Correctional Services
------------	-----------------------

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months


Product drawings and images



PRODUCT IMAGE



PRODUCT IMAGE

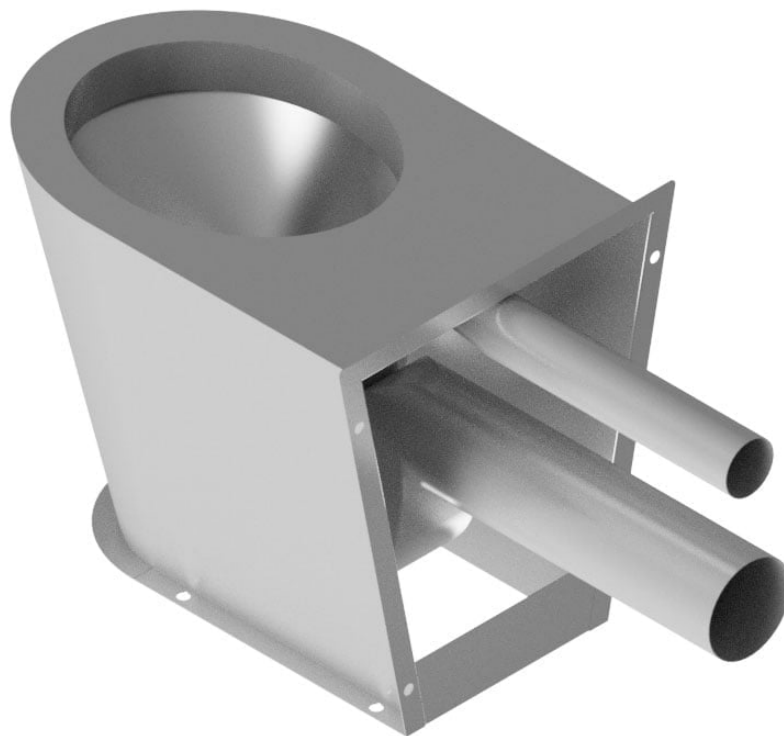

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.