

PRODUCT RANGE SPECIFICATION

B17654(PB) – Wall-Mounted Stainless Steel Toilet with P-Trap

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B17654(PB){PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	---------------------------------------	---	-----------------------------

01 Product description and specification

Product description	Wall-mounted Grade 304 stainless steel toilet pan with a P-trap and back-entry flush inlet for commercial and institutional washrooms. Precision-engineered from 1.2 mm thick Grade 304 (18/10) stainless steel, the unit offers exceptional strength, corrosion resistance, and hygiene, making it suited to high-traffic and security-sensitive environments. This wall-mounted model is specifically designed for use with concealed flush systems, including in-wall cisterns and flush valves. Its sleek form conceals all plumbing, offering both tamper resistance and ease of maintenance. The hygienic brushed satin finish, seamless construction, and fully enclosed design minimise dirt traps and enhance durability in demanding applications. The pan features a 62 mm diameter tapered back-entry flush inlet, suitable for standard concealed flushing mechanisms, and a 102 mm OD outlet designed for direct connection to 110 mm PVC soil pipes. A heavy-duty stainless steel wall-mounting plate with four pre-punched 12 mm fixing holes provides a secure and tamper-resistant installation method. Once mounted, the WC pan slides onto the plate and fastens securely from the sides. Seat holes can be provided upon request and must be specified when ordering.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B17654(PB). Wall-Mounted Stainless Steel Toilet with P-Trap. The pan features a 62 mm diameter tapered back-entry flush inlet, suitable for standard concealed flushing mechanisms, and a 102 mm OD outlet designed for direct connection to 110 mm PVC soil pipes. A heavy-duty stainless steel wall-mounting plate with four pre-punched 12 mm fixing holes provides a secure and tamper-resistant installation method.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17654(PB)	Wall Mounted Wc Pan To B17654{pss}	Standard configuration


03 Application information

Intended applications	Public Restrooms
Industries	Government & Public Sector

04 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

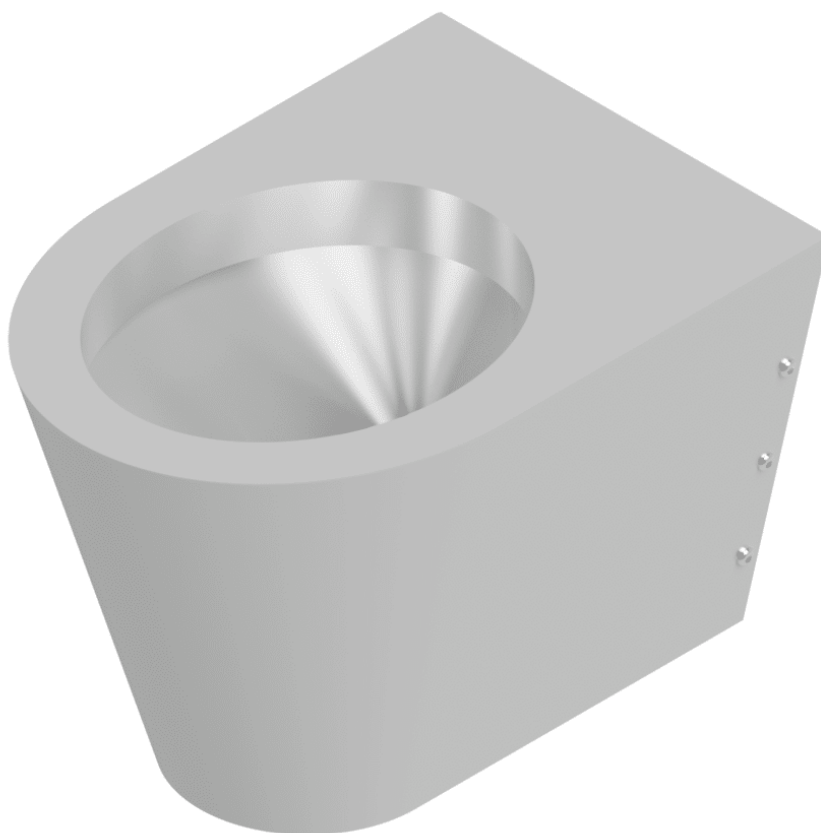
**PRODUCT IMAGE**




PRODUCT IMAGE

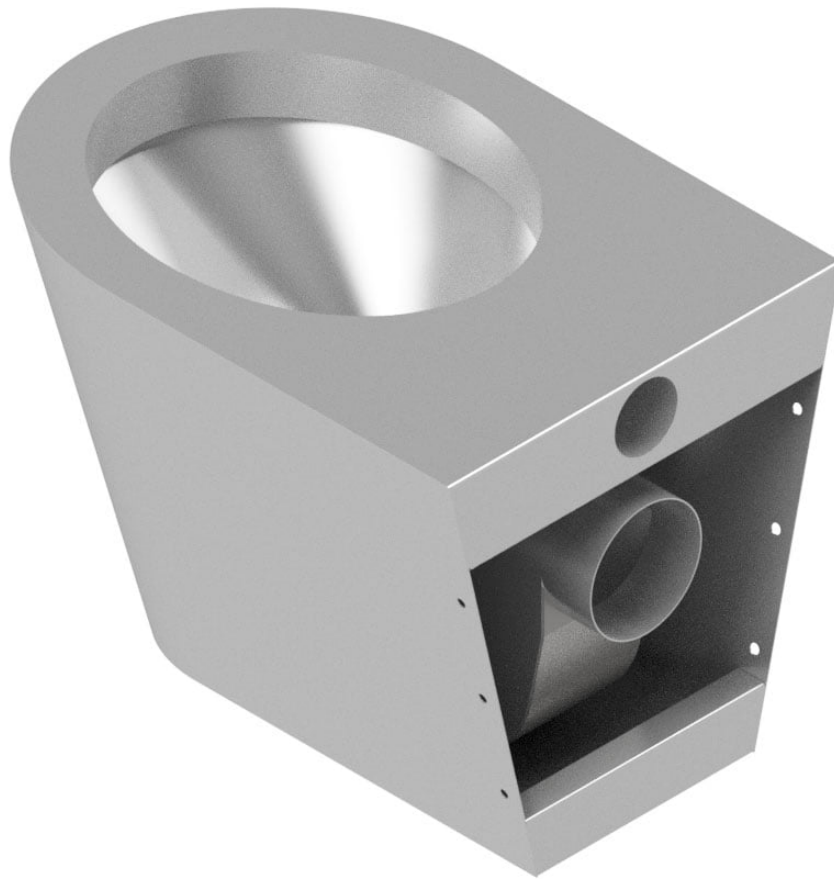

PRODUCT IMAGE

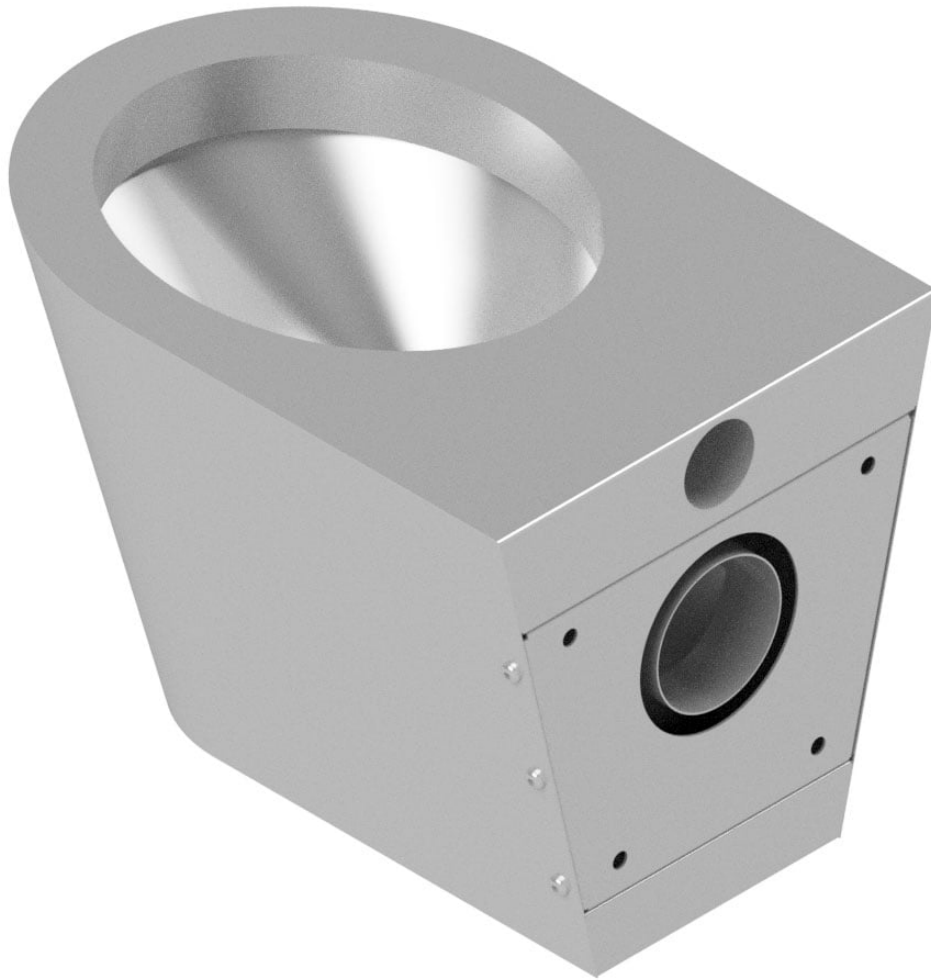


PRODUCT IMAGE

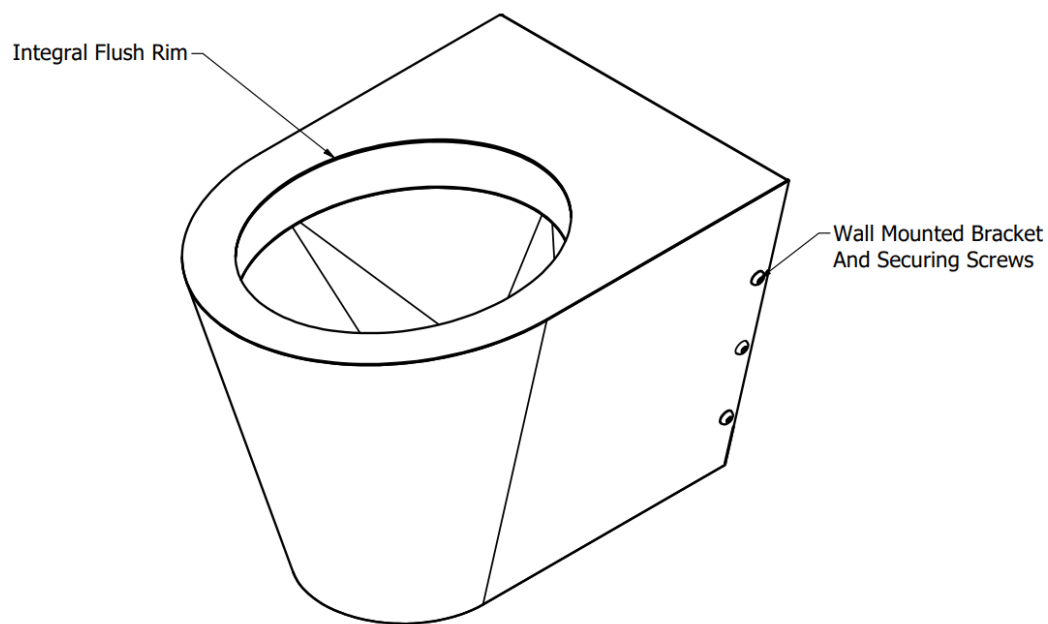


TOP RIGHT

PRODUCT IMAGE

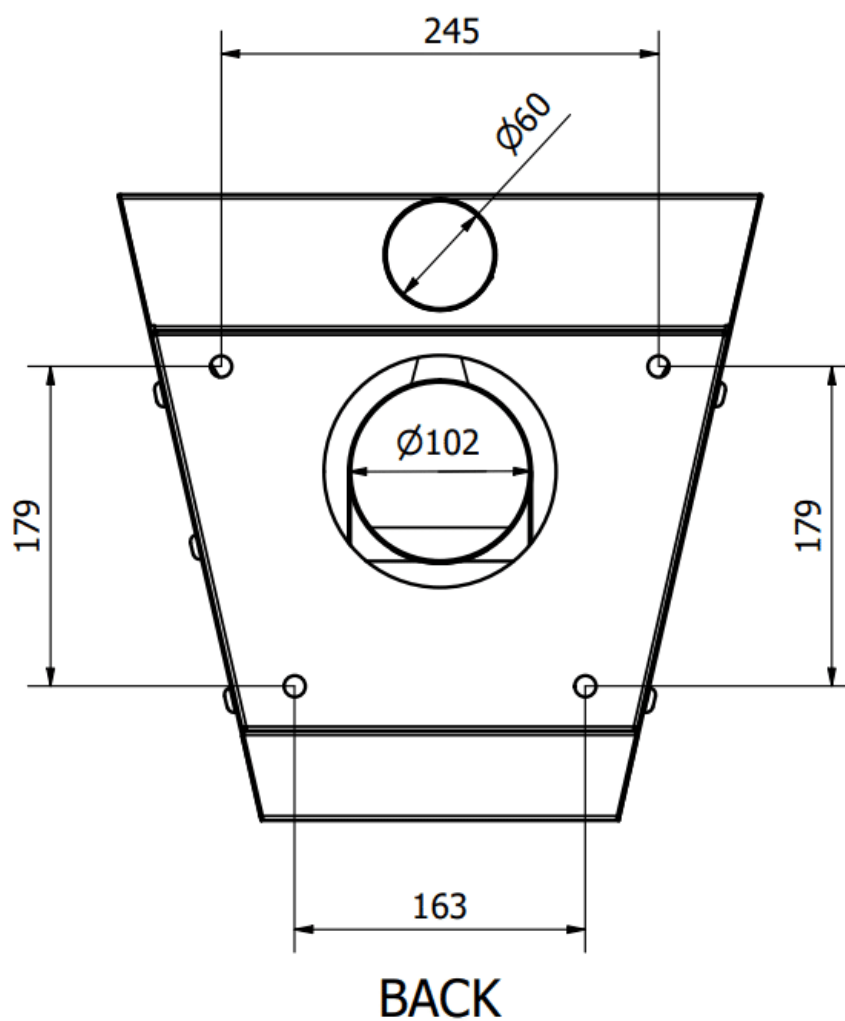


PRODUCT IMAGE

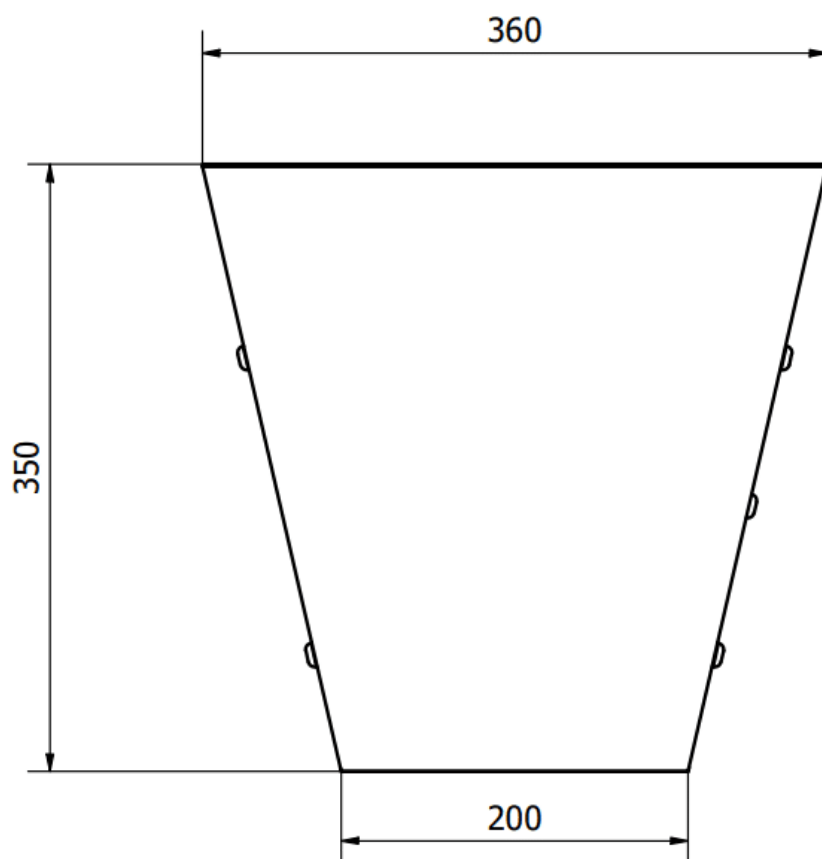


FRONT

PRODUCT IMAGE

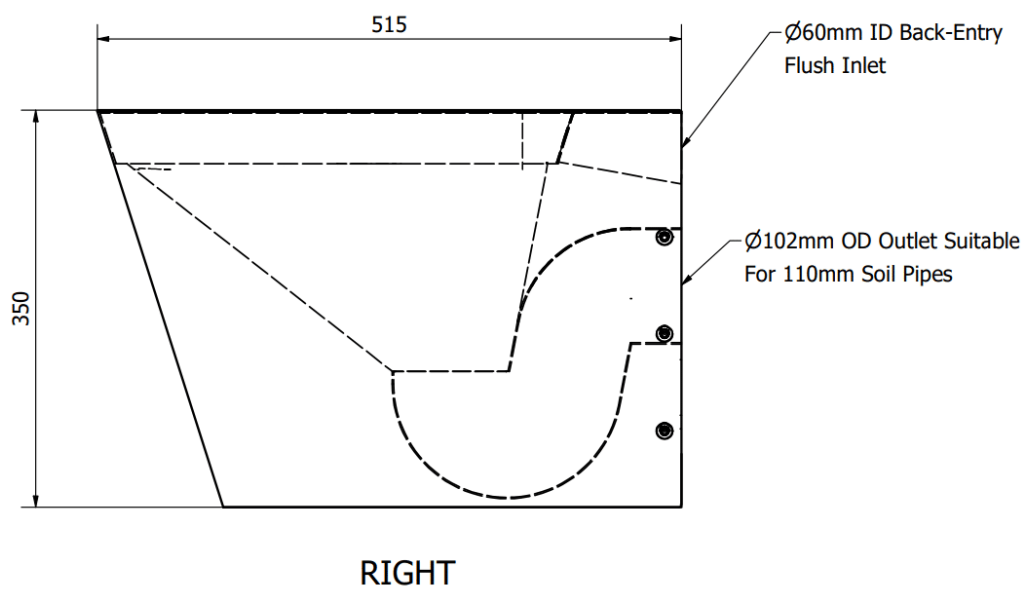

PRODUCT IMAGE

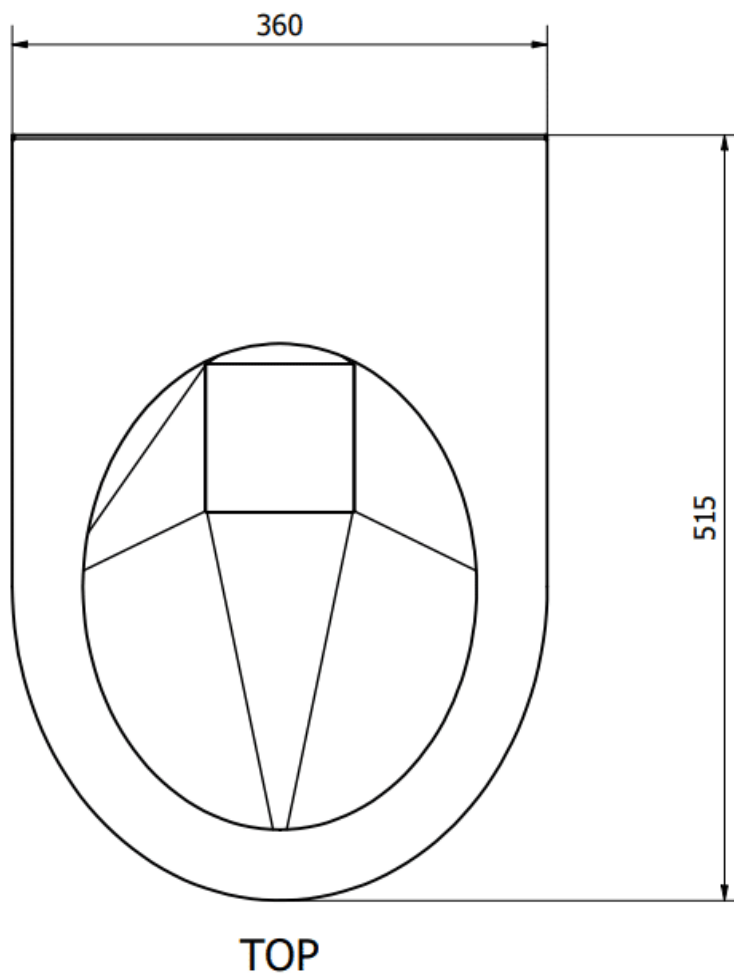

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.