
MODEL SPECIFICATION

B17654(PB) – Toilet Wall-Mounted P-Trap Back-Entry



PRODUCT IMAGE

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Model	B17654(PB){PSS}	14 Nov 2026

01 Model specification

Wall-Mounted WC Pan, Grade 304 Stainless Steel, 1.2mm Material Thickness, Ø62mm Tapered Back-Entry Flush Inlet, 102mm OD Waste Outlet for 110mm PVC Soil Pipe, with P-Trap and Wall Plate with Four Ø12mm Fixing Holes, without Pre-Punched Toilet Seat Mounting Holes, Basterfield B17654(PB)

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Seat Mounting Holes	Not Pre-Punched	—	Whether the WC pan has pre-punched toilet seat mounting holes.

03 Model and supply data

Parent product	B17654(PB) — Wall-Mounted Stainless Steel Toilet with P-Trap
Typical lead time	10–15 working days
Warranty	12 months

04 Specification notes

Configuration description

The B17654(PB) is the wall-mounted Grade 304 stainless steel P-trap WC pan without pre-punched toilet seat mounting holes.

Both configurations use 1.2 mm stainless steel, a tapered 62 mm back-entry flush inlet and a 102 mm OD waste outlet for a 110 mm PVC soil pipe. The pan slides onto its stainless steel wall plate and is secured from the sides. The wall plate has four 12 mm fixing holes. Specify a compatible concealed cistern or flush valve for the installation.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this model.

Basterfield B17654(PB) wall-mounted WC pan; Grade 304 stainless steel, 1.2 mm; P-trap; tapered 62 mm back-entry flush inlet; 102 mm OD waste outlet for 110 mm PVC soil pipe; wall plate with four 12 mm fixing holes; brushed satin finish; seat mounting holes not pre-punched.

Detailed specification

- Model: B17654(PB)
- Product type: Wall-mounted WC pan
- Material: Grade 304 stainless steel
- Material thickness: 1.2 mm
- Finish: Brushed satin
- Trap: P-trap
- Flush inlet: Back entry, tapered, 62 mm diameter
- Waste outlet: 102 mm OD for 110 mm PVC soil pipe
- Mounting: Stainless steel wall plate; pan secured from the sides
- Wall-plate fixing holes: Four, 12 mm diameter
- Seat mounting holes: Not Pre-Punched
- Flushing system: Compatible concealed cistern or flush valve

05 Frequently asked questions

Which seat mounting hole option should I select?

Select Not Pre-Punched for the standard B17654(PB) pan, or Pre-Punched for B17654(PB-H). The latter is the same toilet with holes pre-punched for mounting a toilet seat.

How is the pan mounted?

The stainless steel wall plate has four pre-punched 12 mm fixing holes. The pan slides onto the plate and is secured from the sides. These wall-plate fixing holes are separate from the selectable toilet seat mounting holes.

What are the flush inlet and waste outlet sizes?

Both options have a tapered 62 mm diameter back-entry flush inlet and a 102 mm outside-diameter waste outlet for connection to a 110 mm PVC soil pipe.


Which flushing arrangement does this pan use?

The back-entry inlet is intended for a compatible concealed cistern or concealed flush valve. Specify the required arrangement for the installation.


Product drawings and images




PRODUCT IMAGE

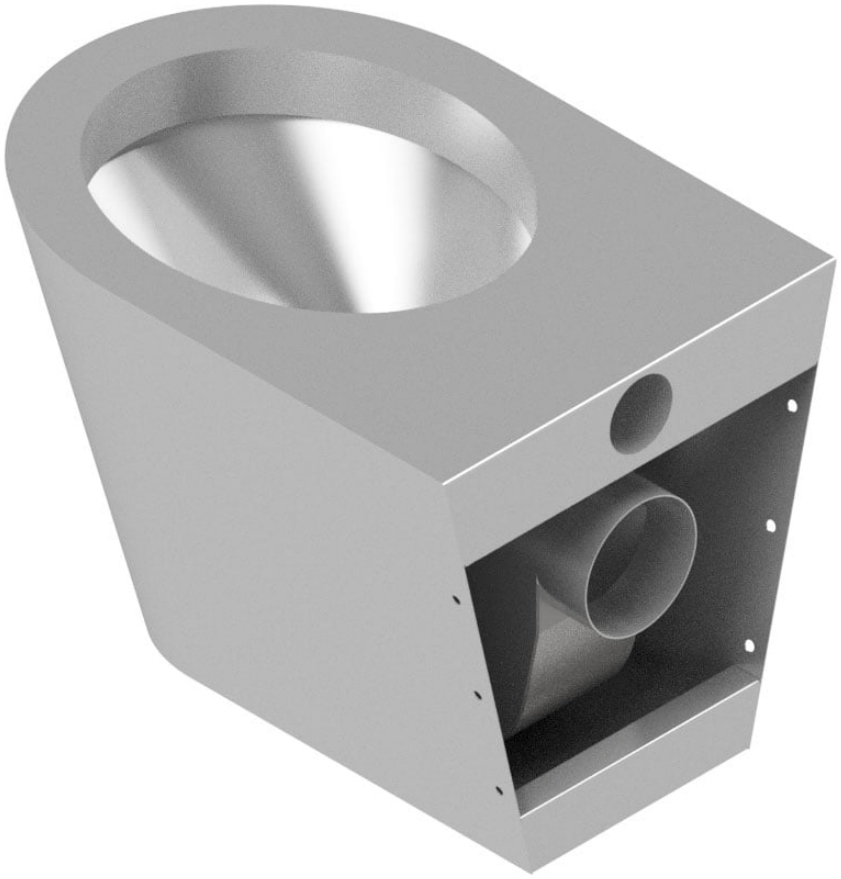

PRODUCT IMAGE

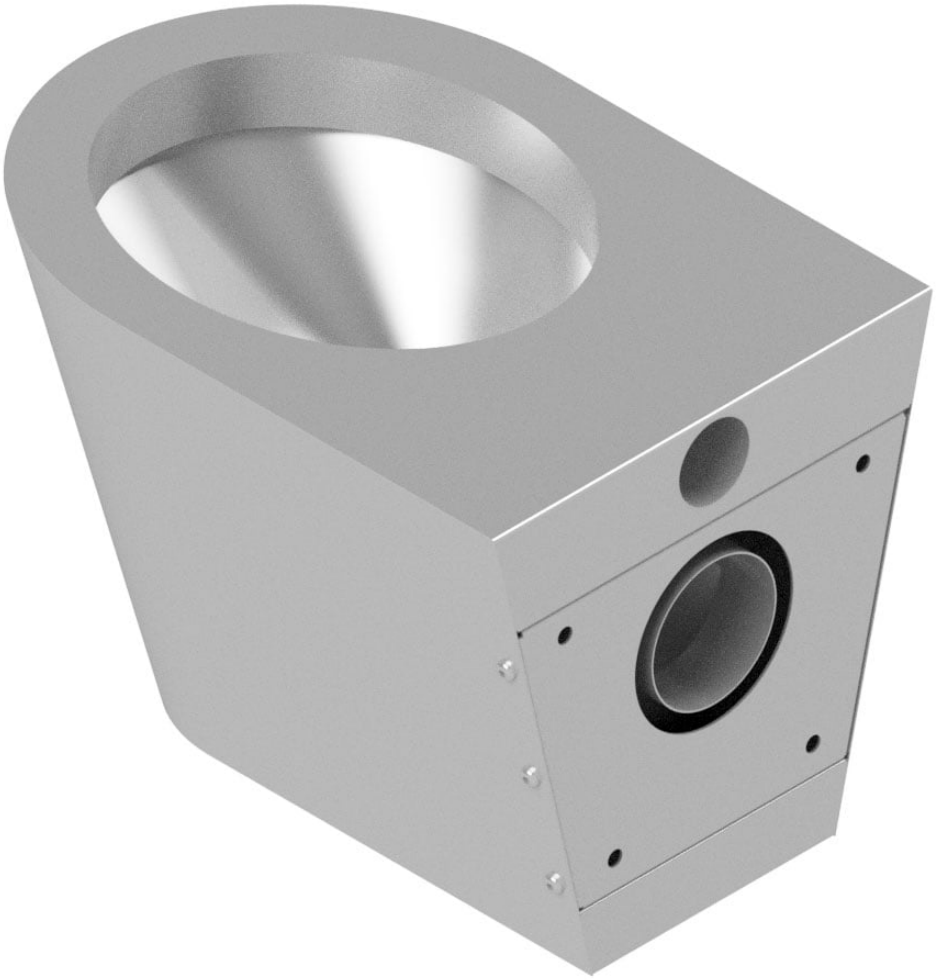


PRODUCT IMAGE

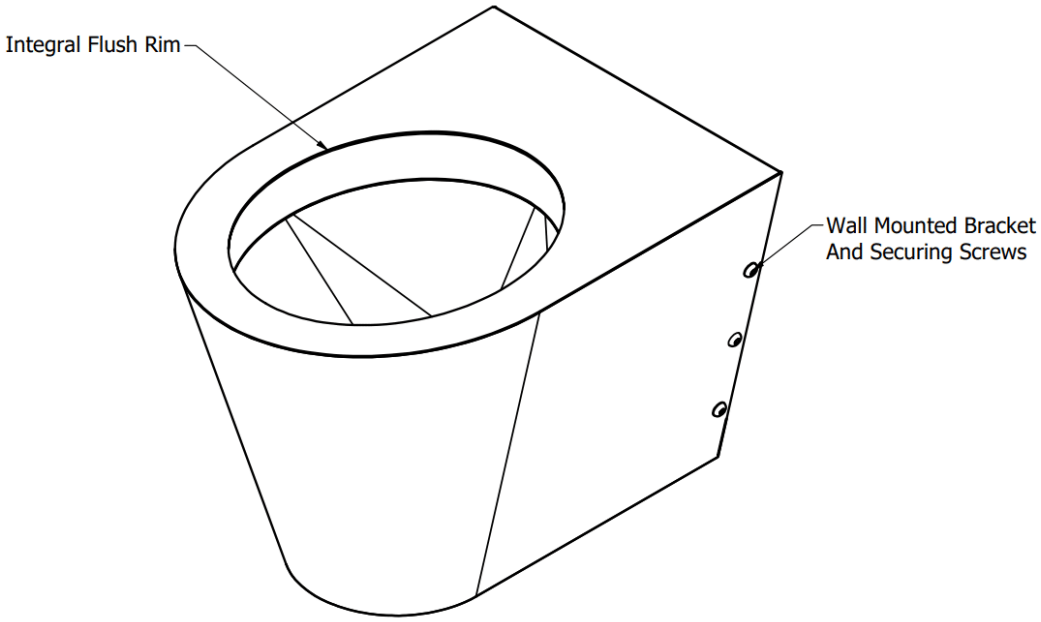


TOP RIGHT


PRODUCT IMAGE

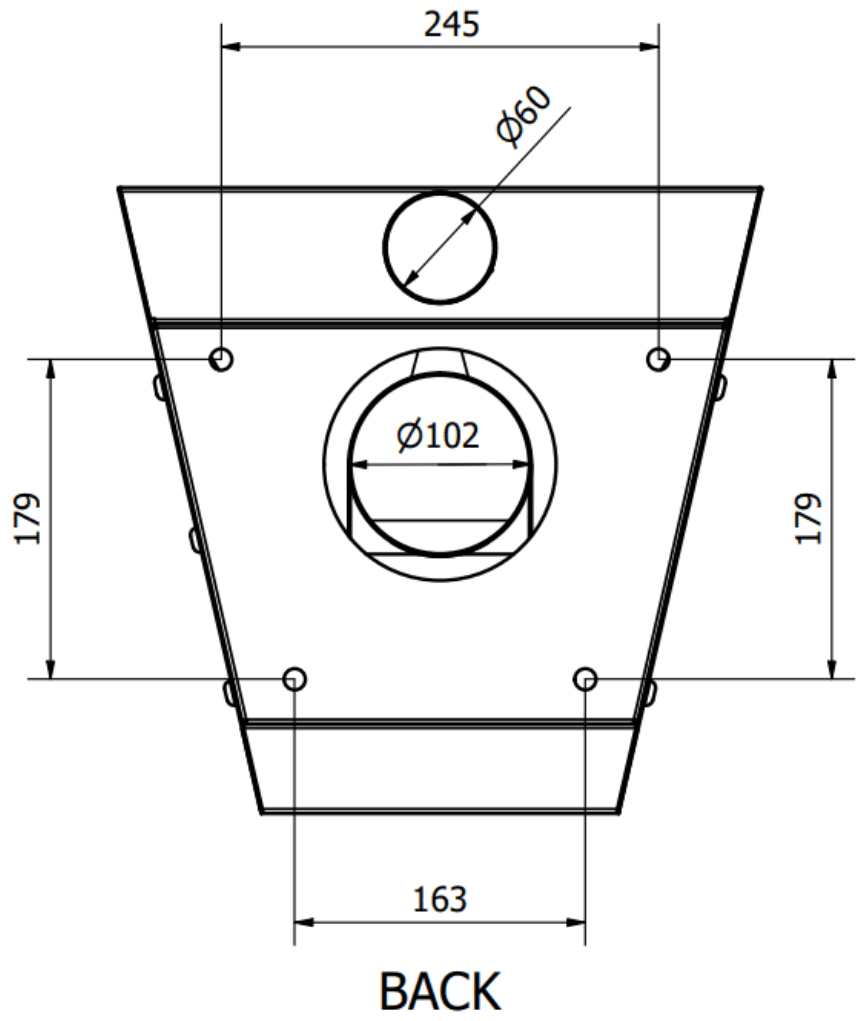

PRODUCT IMAGE

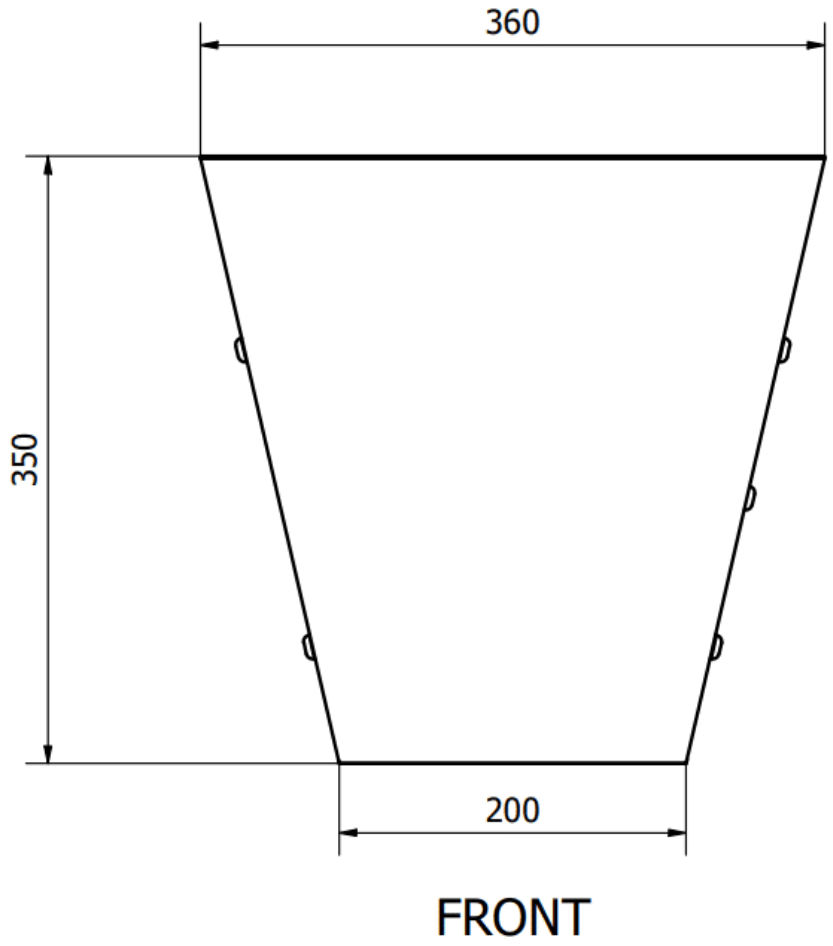


PRODUCT IMAGE

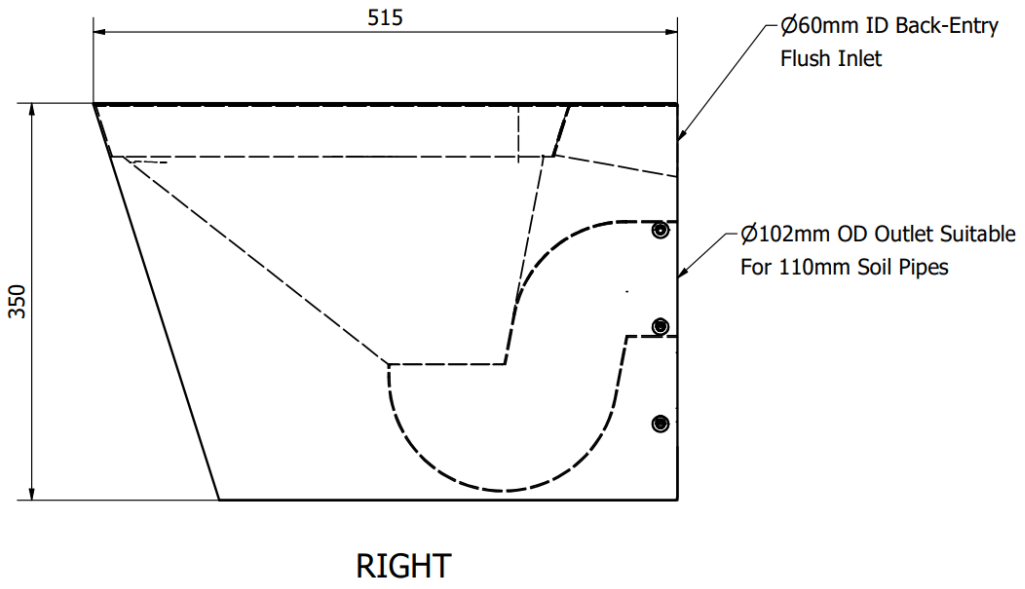

RIGHT

PRODUCT IMAGE

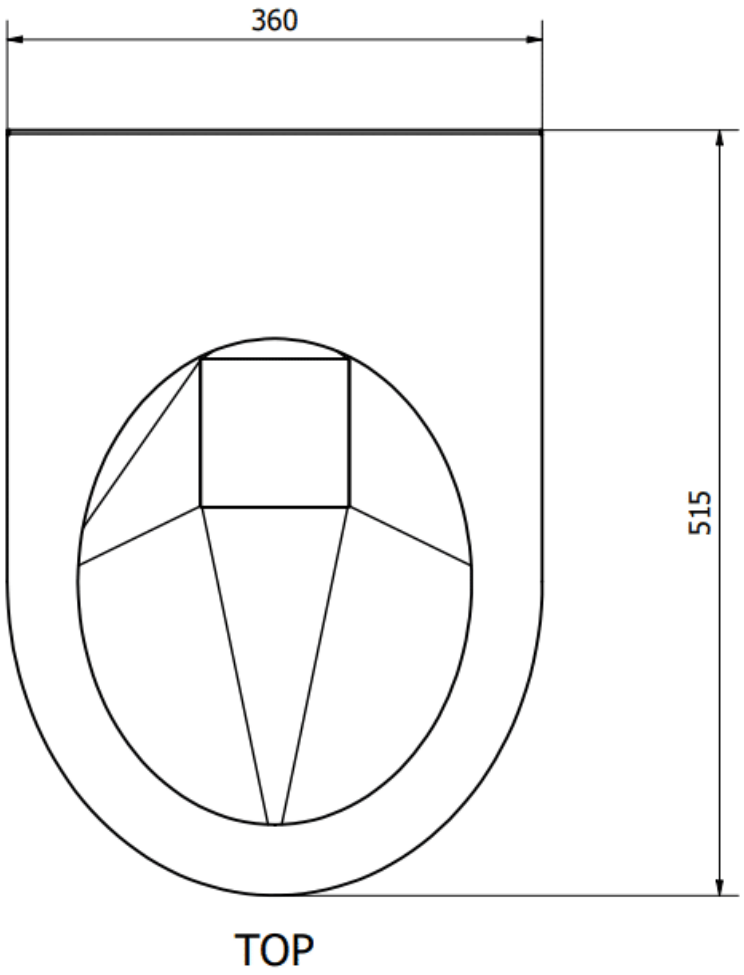

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.