
PRODUCT RANGE SPECIFICATION

B17654(PB) – Wall-Mounted Stainless Steel Toilet with P-Trap



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B17654(PB){PSS}	14 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b17654pb-wall-mounted-stainless-steel-toilet-with-p-trap#specifications

01 Product description and specification

Product description	Wall-mounted Grade 304 stainless steel WC pan with P-trap and back-entry flushing; choose without or with pre-punched toilet seat mounting holes.
Short Form Specification	**SPECIFICATION USE** Use this description when specifying this product range. Basterfield B17654(PB) wall-mounted WC pan range; Grade 304 stainless steel, 1.2 mm; P-trap; tapered 62 mm back-entry flush inlet; 102 mm OD waste outlet for 110 mm PVC soil pipe; brushed satin finish; wall plate with four 12 mm fixing holes; pan secured from the sides. Seat mounting holes not pre-punched for B17654(PB), or pre-punched for B17654(PB-H), as selected.

02 Configuration options

Seat Mounting Holes	Not Pre-Punched; Pre-Punched

Options vary by model; not every combination is available. Use the product page to select a model.

03 Functional features

01 **Two Seat Mounting Options**
Choose B17654(PB) without pre-punched seat mounting holes or B17654(PB-H) with the holes pre-punched.

02 **Wall-Plate Mounting**
A stainless steel plate has four pre-punched 12 mm fixing holes; the pan slides onto it and secures from the sides.

03 **Defined Flush and Waste Connections**
Both options have a tapered 62 mm back-entry flush inlet and a 102 mm OD waste outlet for a 110 mm PVC soil pipe.

04 **Grade 304 Stainless Steel**
Both pans use 1.2 mm Grade 304 stainless steel with a brushed satin finish.

04 Application information

Intended applications	Public Restrooms

04 Application information

Industries	Government & Public Sector

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Frequently asked questions

Which seat mounting hole option should I select?

Select Not Pre-Punched for the standard B17654(PB) pan, or Pre-Punched for B17654(PB-H). The latter is the same toilet with holes pre-punched for mounting a toilet seat.

How is the pan mounted?

The stainless steel wall plate has four pre-punched 12 mm fixing holes. The pan slides onto the plate and is secured from the sides. These wall-plate fixing holes are separate from the selectable toilet seat mounting holes.

What are the flush inlet and waste outlet sizes?

Both options have a tapered 62 mm diameter back-entry flush inlet and a 102 mm outside-diameter waste outlet for connection to a 110 mm PVC soil pipe.


Which flushing arrangement does this pan use?

The back-entry inlet is intended for a compatible concealed cistern or concealed flush valve. Specify the required arrangement for the installation.


Product drawings and images




PRODUCT IMAGE

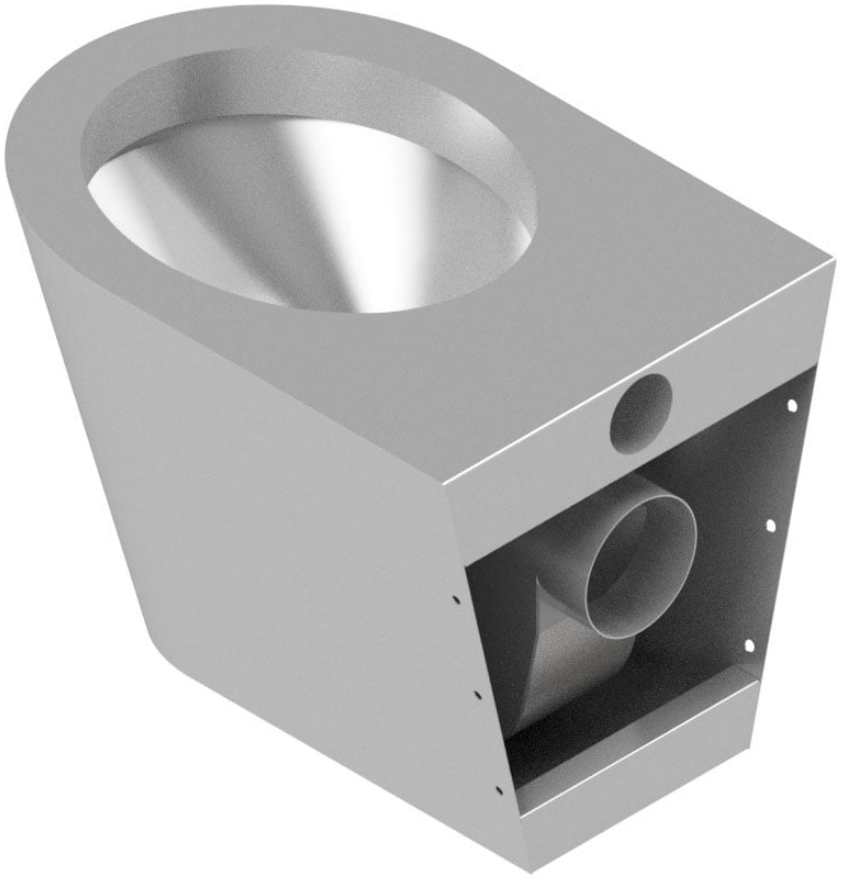

PRODUCT IMAGE

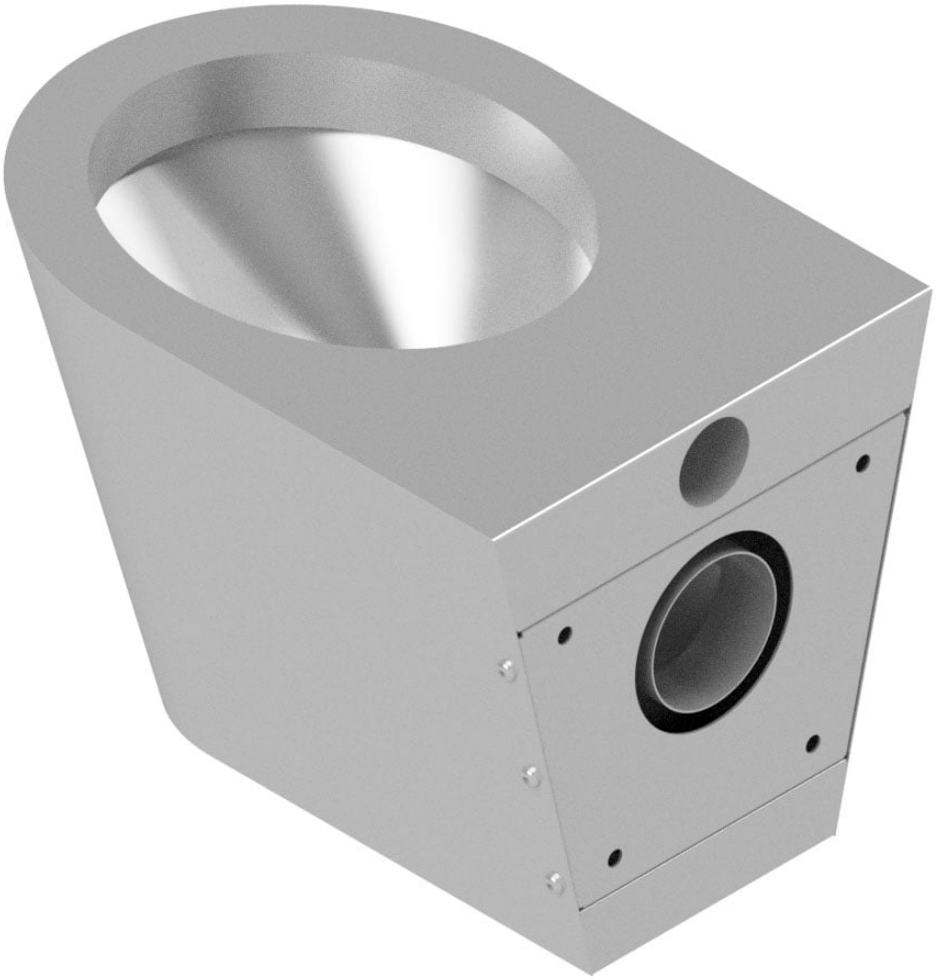


PRODUCT IMAGE

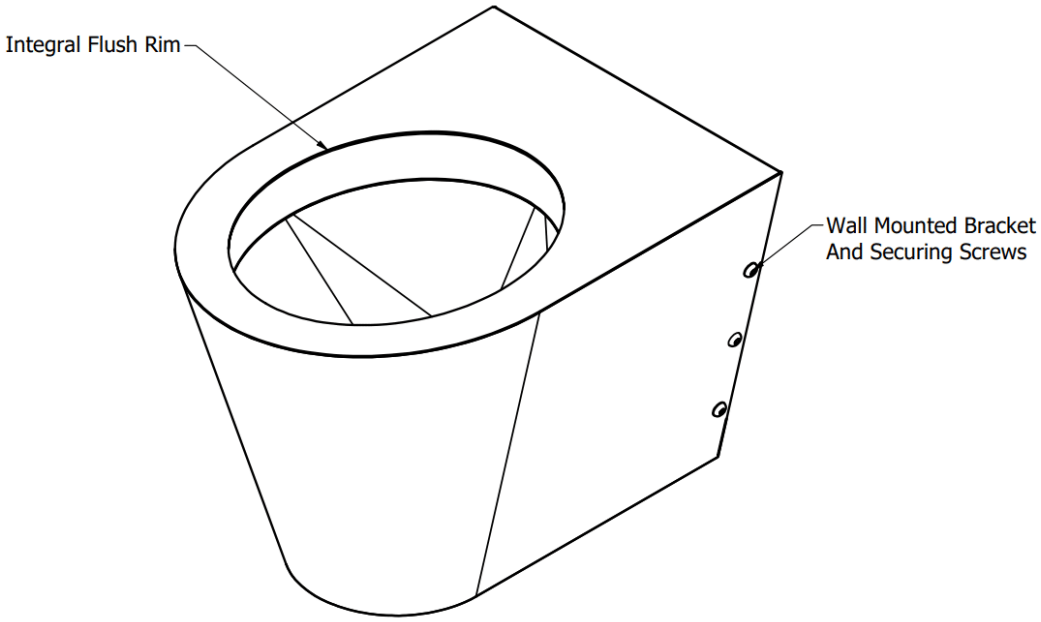


TOP RIGHT


PRODUCT IMAGE

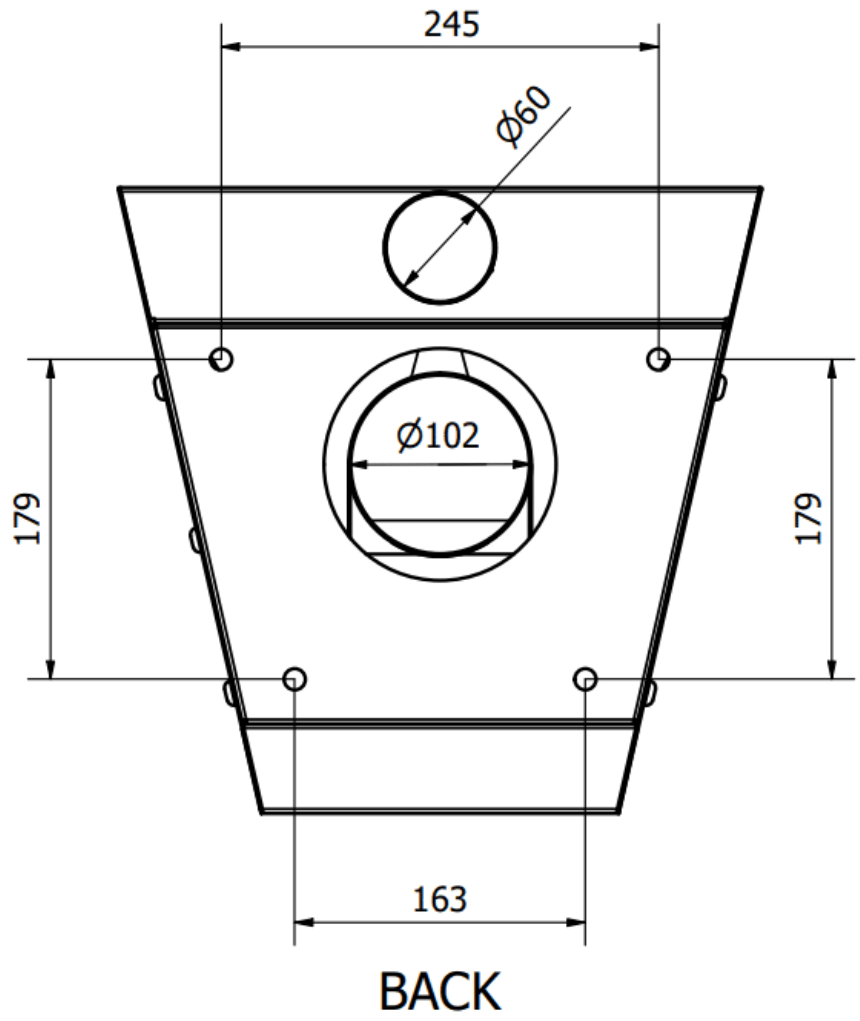

PRODUCT IMAGE

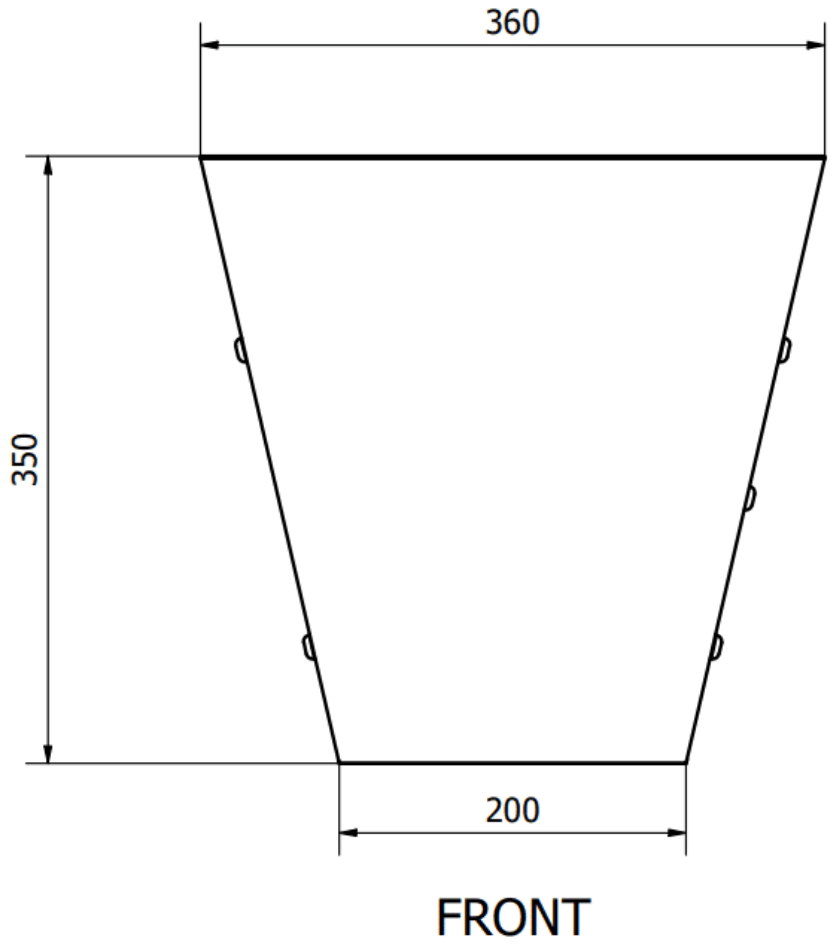


PRODUCT IMAGE

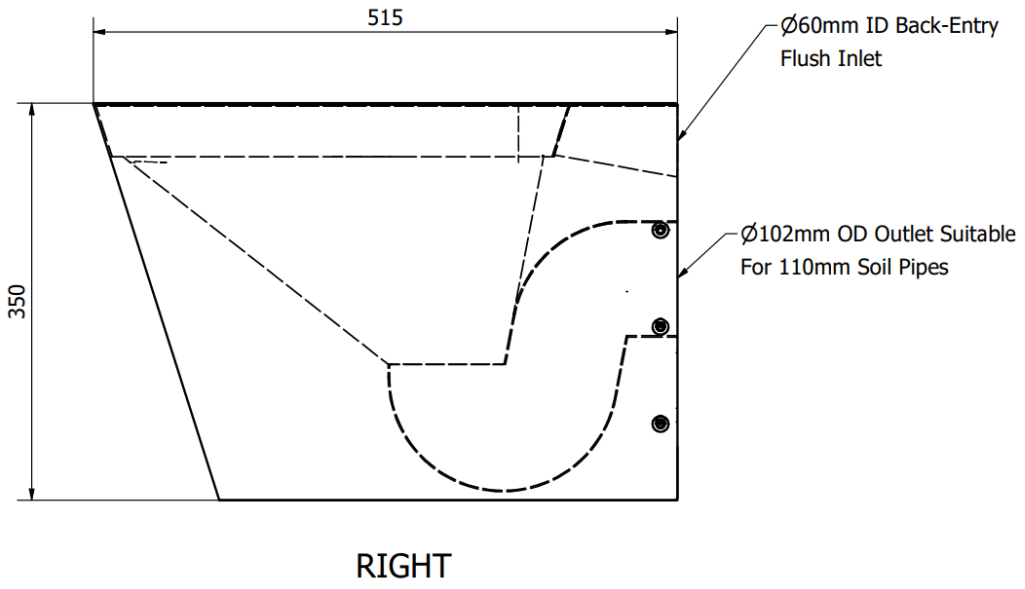

RIGHT

PRODUCT IMAGE

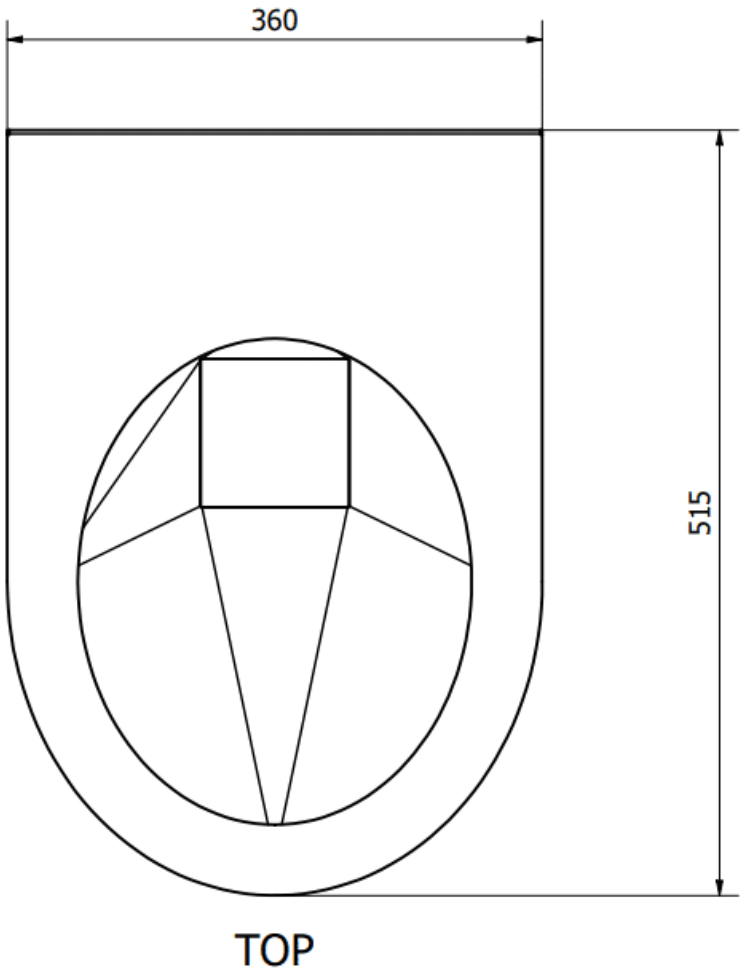

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.