


PRODUCT RANGE SPECIFICATION

B17655(PB) – Shrouded Floor-Mounted Stainless Steel Toilet with P-Trap



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE

Product range

DOCUMENT REFERENCE

B17655(PB){PSS}

DATA STATUS

Published catalogue data

GENERATED ON

5 Oct 2026

01 Product description and specification

Product description

Shrouded Grade 304 stainless steel toilet pan with a P-trap, back-entry flush inlet and floor and wall mounting provisions.

It incorporates a concealed flushing rim and an integrated P-trap with a 102 mm outlet suitable for standard 110 mm sewer connections. The back entry inlet is designed to suit concealed cistern or flush valve systems. The pan is secured with internal mounting flanges—rear and floor-mounted—with 12 mm diameter holes for M10 security bolts. Removable access panels on both sides are fastened using button head security screws with hex inserts, providing ease of maintenance without compromising security.

An optional feature includes pre-drilled mounting holes for a standard toilet seat (must be specified at order). Designed and manufactured in South Africa, the B17655(PB) delivers durability, hygiene, and reduced maintenance costs in challenging environments.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B17655(PB). Shrouded Floor-Mounted Stainless Steel Toilet with P-Trap. It incorporates a concealed flushing rim and an integrated P-trap with a 102 mm outlet suitable for standard 110 mm sewer connections. The pan is secured with internal mounting flanges—rear and floor-mounted—with 12 mm diameter holes for M10 security bolts.

02 Models and configurations


MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17655(PB)	Floor and Wall Shrouded WC Pan to B17655(PB)(PSS) P Trap Back Entry	Standard configuration

03 Application information

Intended applications	Public Restrooms
Industries	Government & Public Sector

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

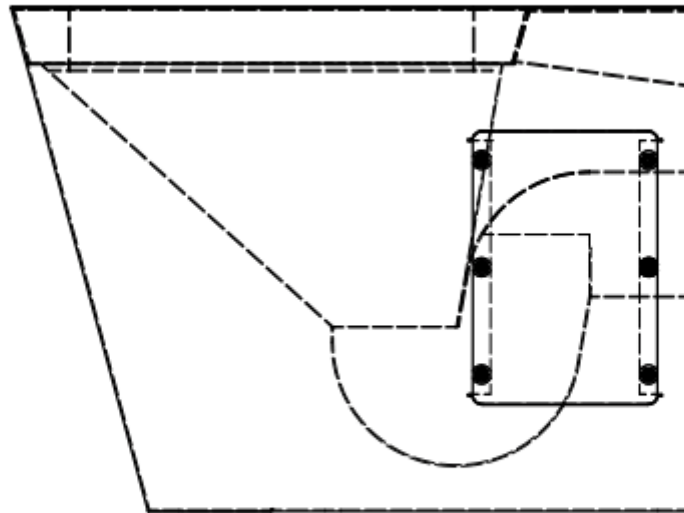Product drawings and images

RIGHT

PRODUCT IMAGE



PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.