
MODEL SPECIFICATION

B17656(CTP) – Toilet Close Coupled P-Trap, No Pre-Punched Holes

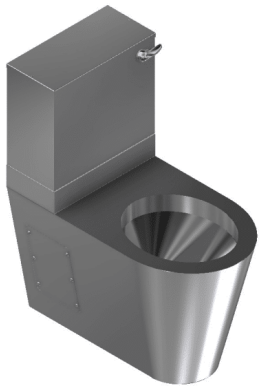

PRODUCT IMAGE

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Model	B17656(CTP){PSS}	Published catalogue data	3 Nov 2026

01 Model specification

Toilet Close Coupled Stainless Steel Grade 304 with Shrouded Design, Top Entry, P-Trap, No Pre-Punched Toilet Seat Mounting Holes, Stainless Steel Cistern and Internal Flushing Mechanism (Basterfield B17656(CTP))

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Trap Type	P-Trap	–	–
Seat Mounting Holes	Not Pre-Punched	–	Whether the WC pan has pre-punched toilet seat mounting holes.

03 Dimensions and mass

PARAMETER	VALUE	UNIT
Length	650	mm
Width	360	mm
Overall height	800	mm

04 Model and supply data

Parent product	B17656 — Close Coupled Shrouded Stainless Steel Toilets
Typical lead time	10–15 working days
Warranty	12 months

05 Specification notes

Configuration description

The B17656(CTP) is a close-coupled, shrouded Grade 304 stainless steel toilet with top-entry flushing, an integral P-Trap outlet, and a satin brushed finish. It is supplied complete with a close-coupled stainless steel cistern and internal flushing mechanism, without pre-punched toilet seat mounting holes.

Overall dimensions are 650 mm long × 360 mm wide × 800 mm high, with a seat height of 410 mm. An integral flushing rim provides bowl wash-down, while the front-mounted flush lever operates the flushing mechanism.

Side access panels provide maintenance access to the plumbing and flushing mechanism. The floor-mounted suite is intended for high-traffic commercial, institutional and public sanitary installations, including public ablutions, healthcare facilities, correctional facilities, schools, transport hubs and industrial washrooms.

Designed and manufactured in South Africa.

Short Form Specification

> **SPECIFICATION USE**
> Use this description when specifying this model.

Basterfield B17656(CTP): Grade 304 Close-Coupled Shrouded Stainless Steel Toilet, Satin Brushed Finish, Top Entry, P-Trap, without pre-punched toilet seat mounting holes. Complete with Stainless Steel Cistern and Internal Flushing Mechanism. Overall Dimensions: 650mm (L) × 360mm (W) × 800mm (H); Seat Height: 410mm.

Detailed specification

Specification	Detail
Model	B17656(CTP)
Product type	Close-coupled shrouded stainless steel toilet
Material / construction	Grade 304 stainless steel
Finish	Satin brushed
Overall dimensions	650 mm (L) × 360 mm (W) × 800 mm (H)
Seat height	410 mm
Trap type	Integral P-Trap waste outlet
Flush entry	Top entry
Flushing system	Close-coupled stainless steel cistern with internal flushing mechanism
Flush activation	Front-mounted flush lever / handle
Bowl wash-down	Integral flushing rim
Maintenance access	Side access panels for plumbing and flushing mechanism
Mounting	Floor mounted
Typical applications	Public ablutions, healthcare facilities, correctional facilities, schools, transport hubs and industrial washrooms
Origin	Designed and manufactured in South Africa
Seat Mounting Holes	Not Pre-Punched

06 Frequently asked questions

What is included with the B17656 close-coupled toilet?

It is supplied complete with a close-coupled stainless steel cistern and internal flushing mechanism.

What are the overall dimensions and seat height?

Overall dimensions are 650 mm long × 360 mm wide × 800 mm high. The seat height is 410 mm.

Which waste outlet and flush entry does it use?

All models use top-entry flushing. B17656(CTP) and B17656(CTP-H) have an integral P-Trap outlet; B17656(CTS-H) has an integral S-Trap outlet.

How is the toilet flushed?

A front-mounted flush lever / handle operates the internal flushing mechanism, and the integral flushing rim provides bowl wash-down.

How is the flushing mechanism accessed for maintenance?

Side access panels provide maintenance access to the plumbing and flushing mechanism.

What material and finish are used?

The suite is manufactured from Grade 304 stainless steel with a satin brushed finish.


Where are the B17656 toilets manufactured?

It is designed and manufactured in South Africa.


What does the -H suffix mean?

The -H suffix means pre-punched toilet seat mounting holes. Choose B17656(CTP-H) for P-Trap with holes or B17656(CTS-H) for S-Trap with holes. B17656(CTP) is the P-Trap model without pre-punched seat mounting holes.


Product drawings and images

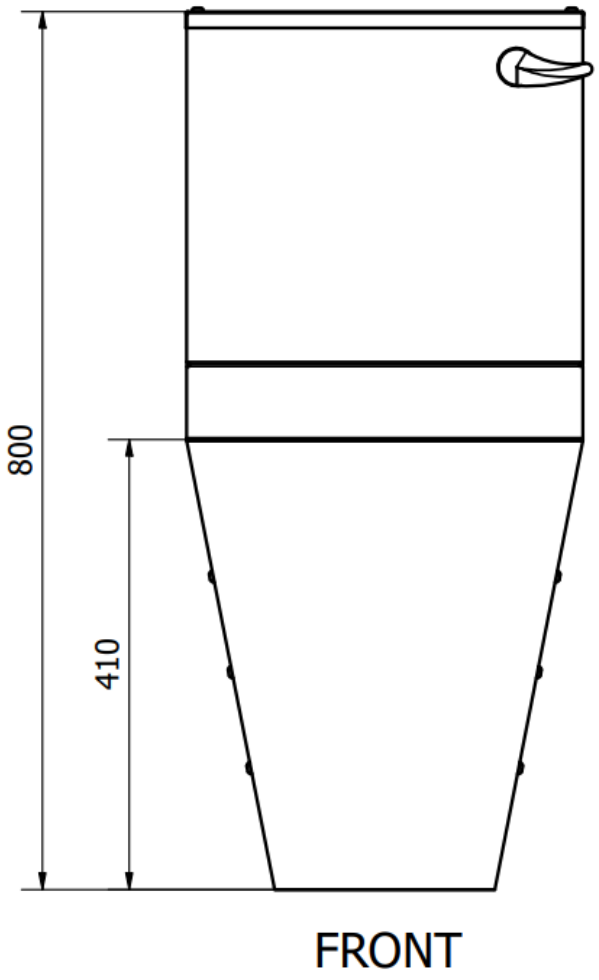


FRONT VIEW · B17656(CTP) front view; dimensions in millimetres.

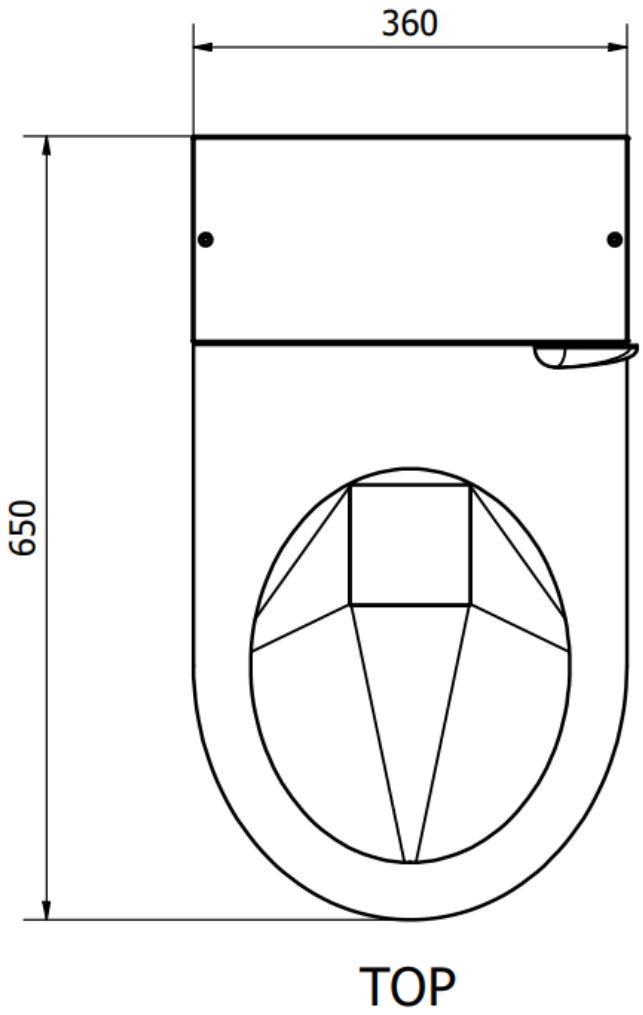

TOP VIEW · B17656(CTP) top view; dimensions in millimetres.

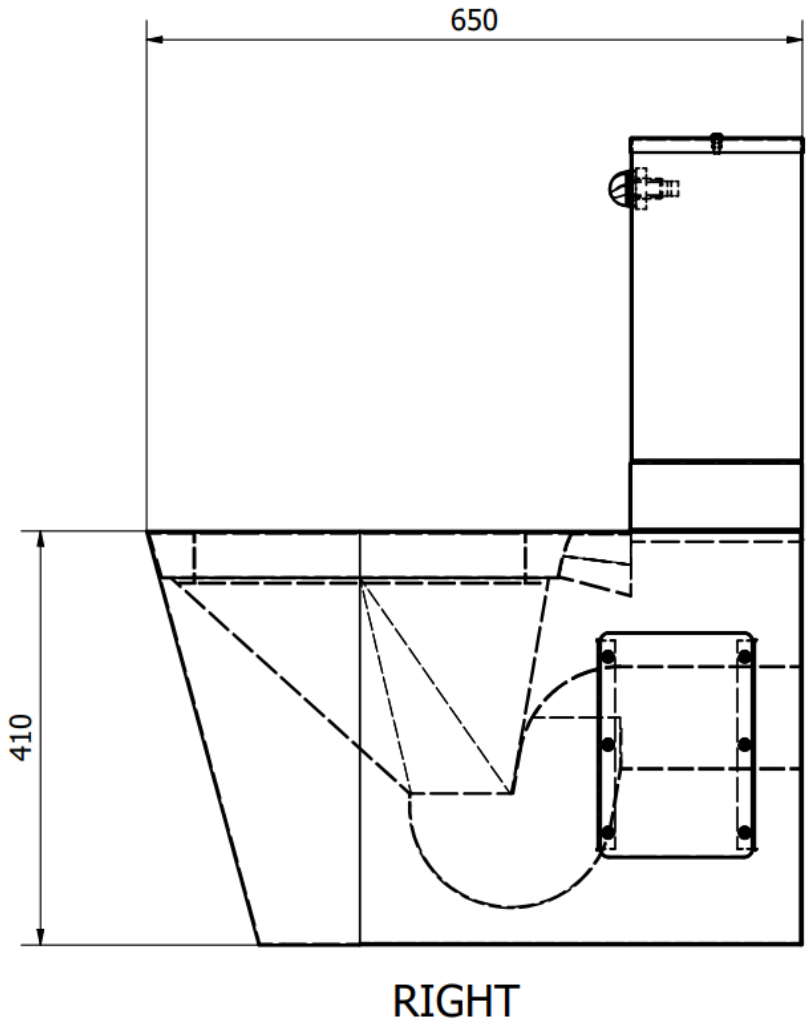

RIGHT VIEW · B17656(CTP) right-side view; dimensions in millimetres.

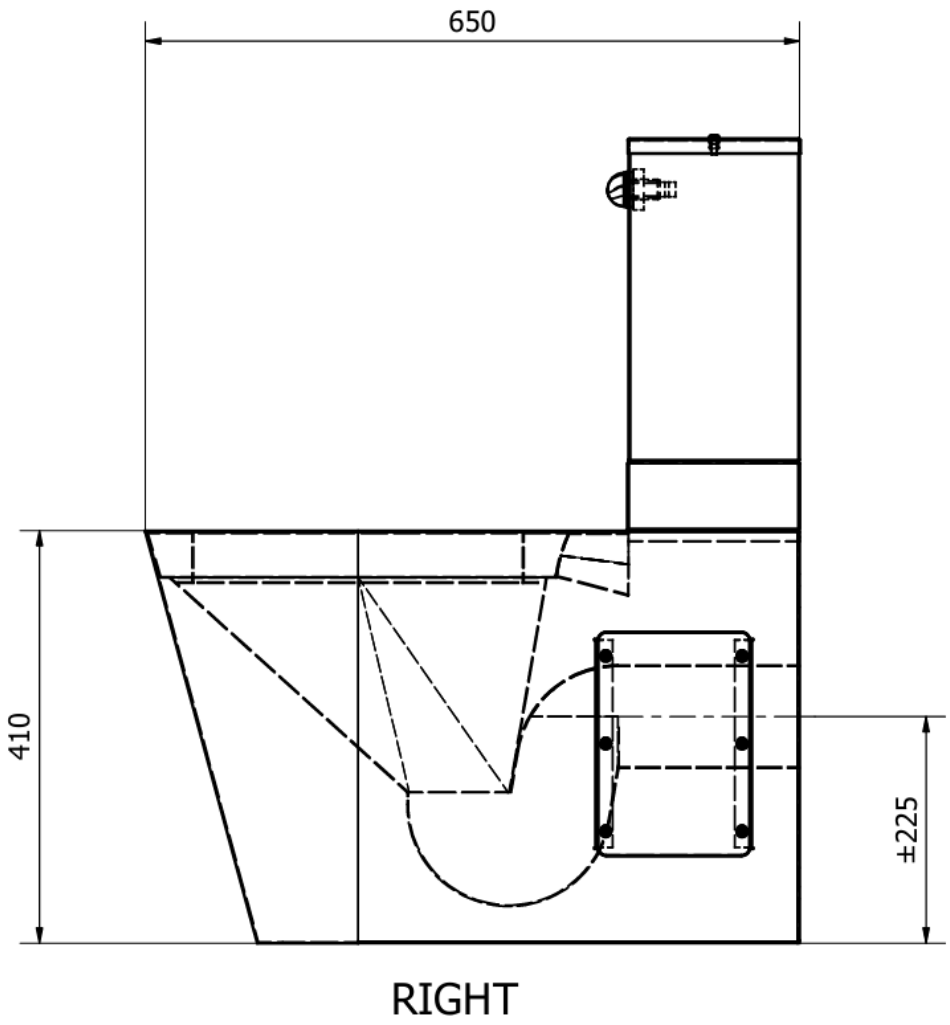

DETAIL VIEW · B17656(CTP) dimensioned right-side view including the P-trap outlet height; dimensions in millimetres.

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.