

PRODUCT RANGE SPECIFICATION

B17656(CTP) – Close Coupled Shrouded Stainless Steel Toilet – Top-Entry P-Trap



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE

Product range

DOCUMENT REFERENCE

B17656(CTP){PSS}

DATA STATUS

Published catalogue data

GENERATED ON

4 Oct 2026

01 Product description and specification

Product description

The B17656(CTP) is a close-coupled, shrouded stainless steel toilet with a top-entry flush arrangement and an integral P-trap waste outlet. It is manufactured from Grade 304 stainless steel with a satin brushed finish and is supplied complete with a close-coupled stainless steel cistern and internal flushing mechanism.

Overall dimensions are 650 mm long × 360 mm wide × 800 mm high, with a seat height of 410 mm. An integral flushing rim provides bowl wash-down, while the front-mounted flush lever operates the flushing mechanism.

Side access panels provide maintenance access to the plumbing and flushing mechanism. The floor-mounted suite is intended for high-traffic commercial, institutional and public sanitary installations, including public ablutions, healthcare facilities, correctional facilities, schools, transport hubs and industrial washrooms.

Designed and manufactured in South Africa.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Shall be Basterfield B17656(CTP) Close Coupled Stainless Steel Toilet with P-Trap, manufactured from Grade 304 stainless steel with a satin brushed finish, complete with close-coupled stainless steel cistern and internal flushing mechanism. Overall dimensions shall be 650 mm (L) × 360 mm (W) × 800 mm (H), with a 410 mm seat height, incorporating an integral flushing rim, front-mounted flush lever, integral P-trap outlet and side access panels for maintenance.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17656(CTP)	B17656(CTP) Close Coupled Shrouded Stainless Steel Toilet, Top-Entry P-Trap, Complete with Stainless Steel Cistern and Internal Flushing Mechanism.	Overall dimensions: 650 × 360 × 800 mm (L × W × H)

03 Functional features

01 Grade 304 stainless steel

The toilet suite is manufactured from Grade 304 stainless steel with a satin brushed finish.

- 02 Complete close-coupled cistern**
Supplied complete with a close-coupled stainless steel cistern and internal flushing mechanism.
- 03 Integral P-trap waste outlet**
The shrouded floor-mounted suite incorporates an integral P-trap waste outlet.
- 04 Integral flushing rim**
An integral flushing rim provides wash-down around the toilet bowl.
- 05 Front-mounted flush lever**
The flushing mechanism is operated by a front-mounted lever / handle.
- 06 Side maintenance access**
Side access panels provide access to the plumbing and internal flushing mechanism.


04 Application information


Intended applications	Public Restrooms, Restrooms & Ablutions, Secure Ablutions
Industries	General Manufacturing, Government & Public Sector, Hospitals & Clinics, Justice & Corrections, Schools

05 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

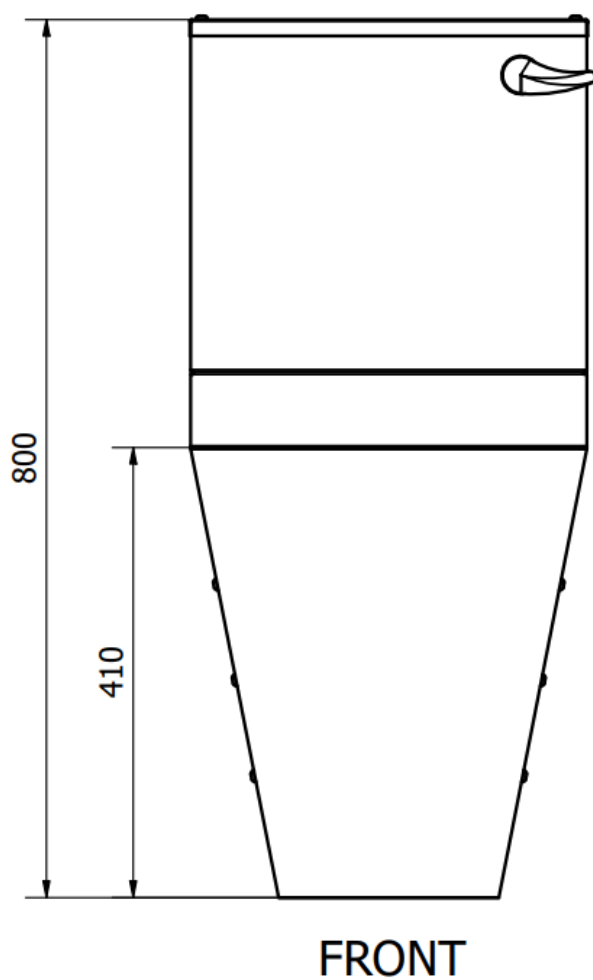
**FRONT VIEW** · B17656(CTP) front view; dimensions in millimetres.

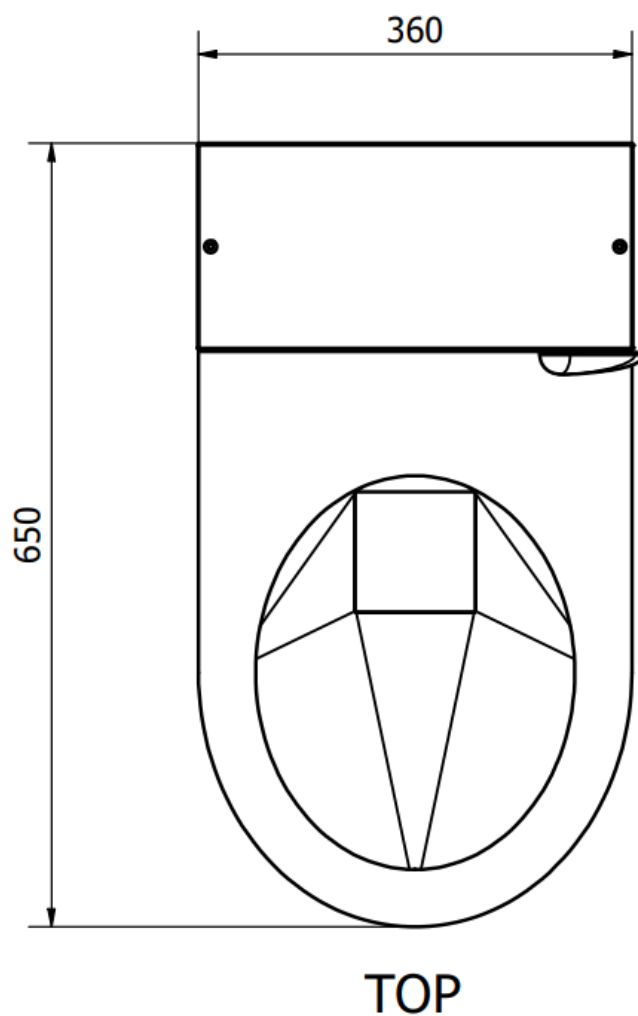

TOP VIEW · B17656(CTP) top view; dimensions in millimetres.

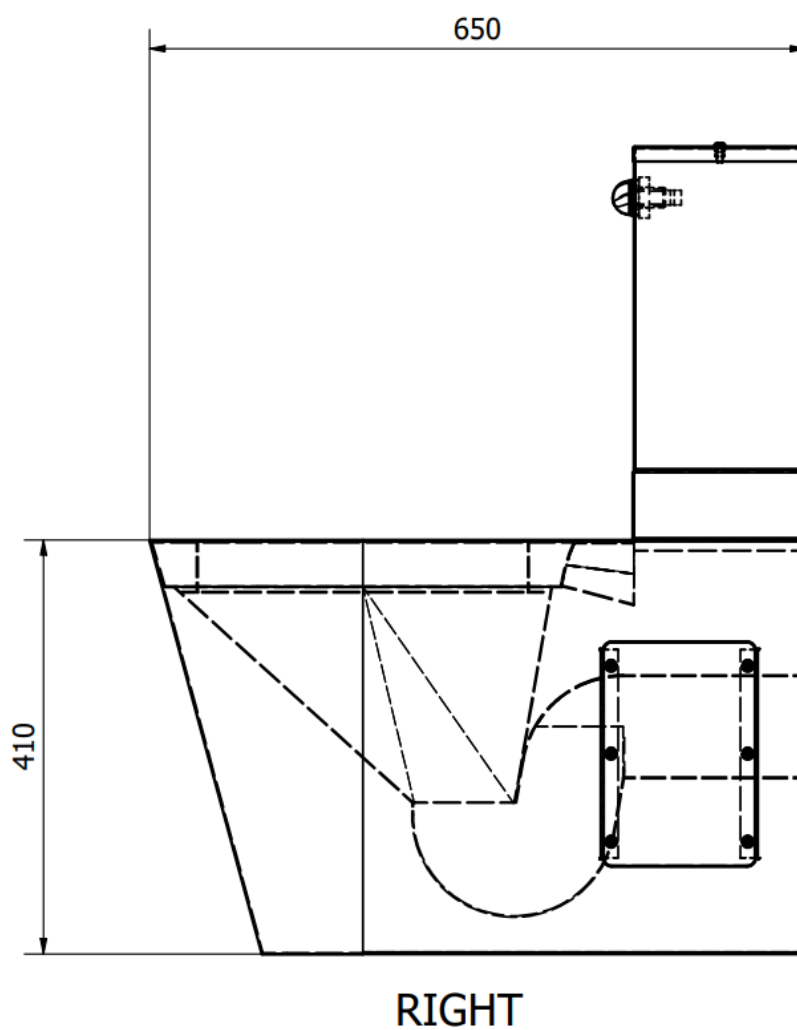

RIGHT VIEW · B17656(CTP) right-side view; dimensions in millimetres.

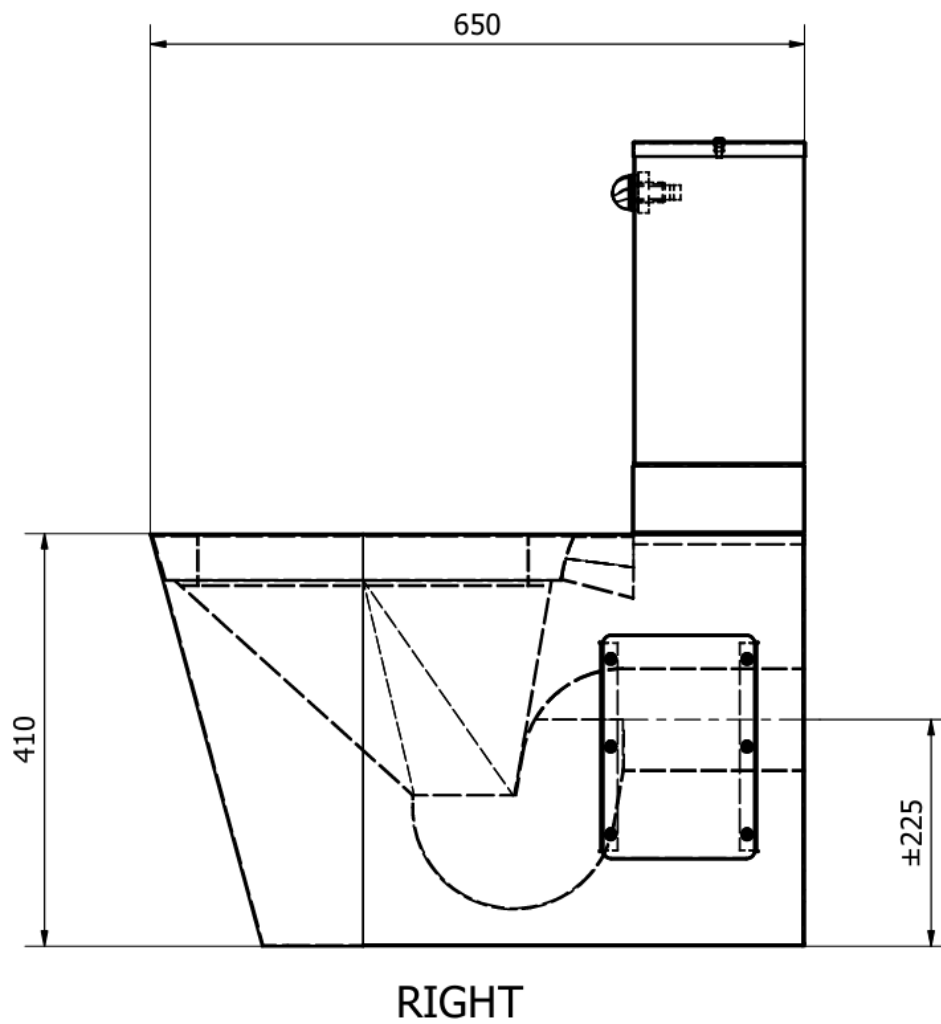

DETAIL VIEW · B17656(CTP) dimensioned right-side view including the P-trap outlet height; dimensions in millimetres.

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.