
PRODUCT RANGE SPECIFICATION

B17657 – Accessible Stainless Steel Floor-Mounted Toilet



PRODUCT IMAGE · B17657(PB) back-entry P-trap disabled WC pan; side panel provides plumbing access.

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	**B17657{PSS}**	**14 Nov 2026**

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b17657-accessible-stainless-steel-floor-mounted-toilet#specifications

01 Product description and specification

Product description	Grade 304 stainless steel toilet pan for accessible washroom layouts; select P-trap or S-trap and top-entry or back-entry flushing.
Short Form Specification	**SPECIFICATION USE** Use this description when specifying this product range. Basterfield B17657 floor-mounted and back-to-wall WC pan range; heavy-gauge Grade 304 stainless steel with satin finish; width 360 mm and height 410 mm; side access panels and secure internal wall and floor fixings; P-trap or S-trap with top-entry or back-entry flush inlet as selected. B17657(PB) has an 800 mm projection.

02 Configuration options

Trap Type	P-Trap; S-Trap
Flushing Inlet Orientation	Back Entry; Top Entry

Options vary by model; not every combination is available. Use the product page to select a model.

03 Functional features

01 Four Published Configurations
Choose P-trap or S-trap and top-entry or back-entry flushing to identify the required model.

02 Grade 304 with Satin Finish
The pan range uses heavy-gauge Grade 304 stainless steel with a satin finish.

03 Access to Concealed Plumbing
Side access panels provide access for plumbing inspection and maintenance.

04 Wall and Floor Fixing
Floor and back-to-wall installation uses secure internal fixings at the wall and floor.

04 Application information

Intended applications	Public Restrooms
Industries	Government & Public Sector, Hospitals & Clinics

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Frequently asked questions

Which choices identify the required model?

Select Trap Type and Flushing Inlet Orientation. The published range combines P-trap or S-trap with top-entry or back-entry flushing.

How do top-entry and back-entry flushing differ?

Top-entry models suit exposed cisterns or flush valves. Back-entry models suit concealed flushing arrangements. Match the inlet to the planned installation.


How is the concealed plumbing accessed?

Side access panels provide access to the concealed plumbing. The pan uses secure internal wall and floor fixings.

What are the dimensions of B17657(PB)?

B17657(PB) has overall dimensions of 800 mm projection × 360 mm width × 410 mm height. Check the selected model details when specifying the installation.

Product drawings and images

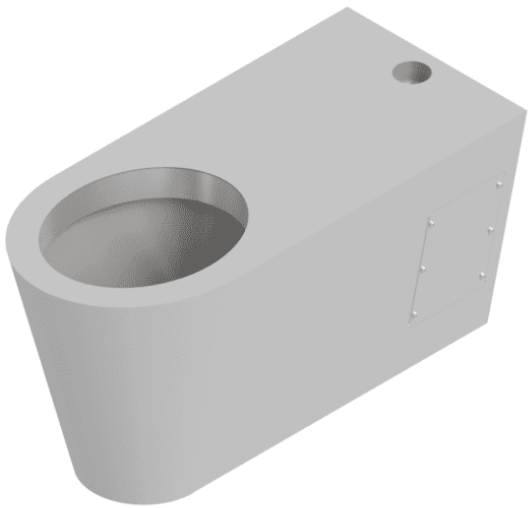

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.