

PRODUCT RANGE SPECIFICATION

B17657 – Accessible Stainless Steel Floor-Mounted Toilet

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B17657{PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	Grade 304 stainless steel toilet pan for accessible washroom layouts, designed for floor and back-to-wall installation. Constructed from heavy gauge Grade 304 (18/10) stainless steel, the unit provides outstanding resistance to vandalism and corrosion, ensuring durability in demanding applications such as public ablution blocks, healthcare institutions, and correctional facilities. The satin finish enhances its hygienic properties, making it easy to clean and maintain whilst providing a professional appearance. The seat height of 410 mm ensures comfort and accessibility for wheelchair users. The compact 360 mm width makes the unit space efficient, whilst still providing adequate strength and stability. Standard access panels are provided on both sides of the pan, simplifying installation and allowing for easy maintenance in service environments. Designed for versatility, the B17657 can be configured with either top-entry flushing (to suit exposed cisterns and flush valves) or back-entry flushing (for concealed cisterns and in-wall systems). Both P-trap and S-trap outlets are available to suit site-specific sewerage requirements, making the unit compatible with standard PVC or cast-iron drainage systems. Secure internal fixings at both wall and floor points ensure rigid installation and increased resistance against tampering. This toilet has been designed and manufactured in South Africa to meet international hygiene and accessibility standards.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B17657. Accessible Stainless Steel Floor-Mounted Toilet. Trap Type: P-Trap, S-Trap. Flushing Inlet Orientation: Back Entry, Top Entry. The compact 360 mm width makes the unit space efficient, whilst still providing adequate strength and stability.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17657(PB)	SHROUDED DISABLED WC PAN BACK ENTRY	Flushing Inlet Orientation: Back Entry Trap Type: P-Trap
B17657(PT)	SHROUDED DISABLED WC PAN TOP ENTRY	Flushing Inlet Orientation: Top Entry Trap Type: P-Trap
B17657(SB)	B17657(SB) Stainless Steel Disabled Toilet S-Trap Back-Entry Trap Type: S-Trap. Flushing Inlet Orientation: Back Entry.	Flushing Inlet Orientation: Back Entry Trap Type: S-Trap

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17657(ST)	B17657(ST) Stainless Steel Disabled Toilet S-Trap Top-Entry Trap Type: S-Trap. Flushing Inlet Orientation: Top Entry.	Flushing Inlet Orientation: Top Entry Trap Type: S-Trap


03 Application information

Intended applications	Public Restrooms
Industries	Government & Public Sector , Hospitals & Clinics


04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

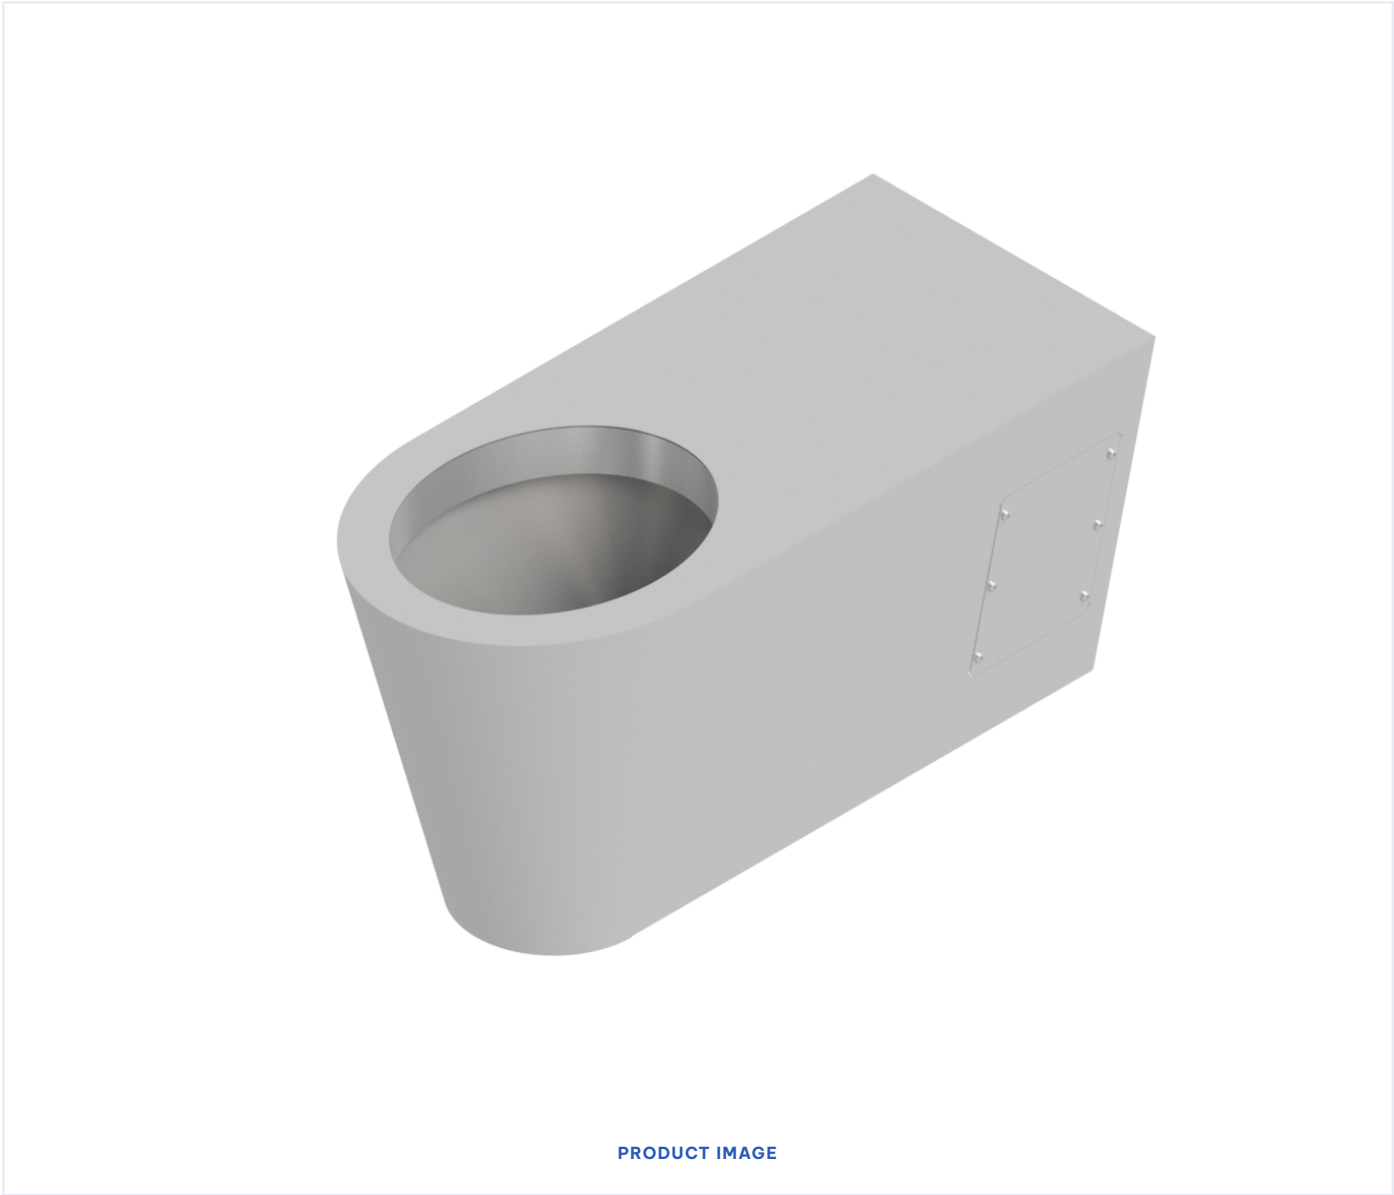

PRODUCT IMAGE

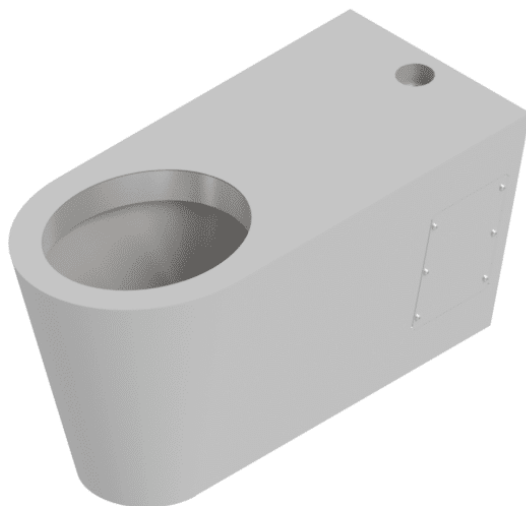

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.