

PRODUCT RANGE SPECIFICATION

B17659 – Accessible Wall-Mounted Stainless Steel Toilet

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B17659{PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	Wall-mounted Grade 304 stainless steel toilet pan for accessible washroom layouts in public and institutional facilities. Constructed from heavy gauge Grade 304 (18/10) stainless steel, the unit features a satin finish that enhances its resistance to corrosion, ensures easy cleaning, and maintains a sleek, professional appearance. It comes standard with a mounting bracket and side mounting holes, ensuring ease of installation and stability. Construction and features • Durable stainless steel Construction – Manufactured from Grade 304 (18/10) stainless steel, ensuring strength and long-term durability. • Wall-Mounted Design – Space-saving and easy to install with a wall mount bracket included. • Versatile Flush Compatibility – Supports both back-entry and top-entry standard flush pipe connections. • Compatible with Various Waste Systems – Designed to suit standard PVC or cast iron sewerage systems with both P-Trap and S-Trap configurations. Optional extras • Side Access Covers – Available for additional enclosure and security.
---------------------	--

Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B17659. Accessible Wall-Mounted Stainless Steel Toilet. Trap Type: P-Trap, S-Trap. Flushing Inlet Orientation: Back Entry, Top Entry. Wall-Mounted Design – Space-saving and easy to install with a wall mount bracket included.
--------------------------	---

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17659(PB)	WALL MOUNTED WC PAN FOR DISABLED TO B17659(PSS)	Flushing Inlet Orientation: Back Entry Trap Type: P-Trap
B17659(PT)	B17659(PT) Wall Mounted Disabled WC Pan P-Trap Top-Entry Trap Type: P-Trap. Flushing Inlet Orientation: Top Entry.	Flushing Inlet Orientation: Top Entry Trap Type: P-Trap

02 Models and configurations

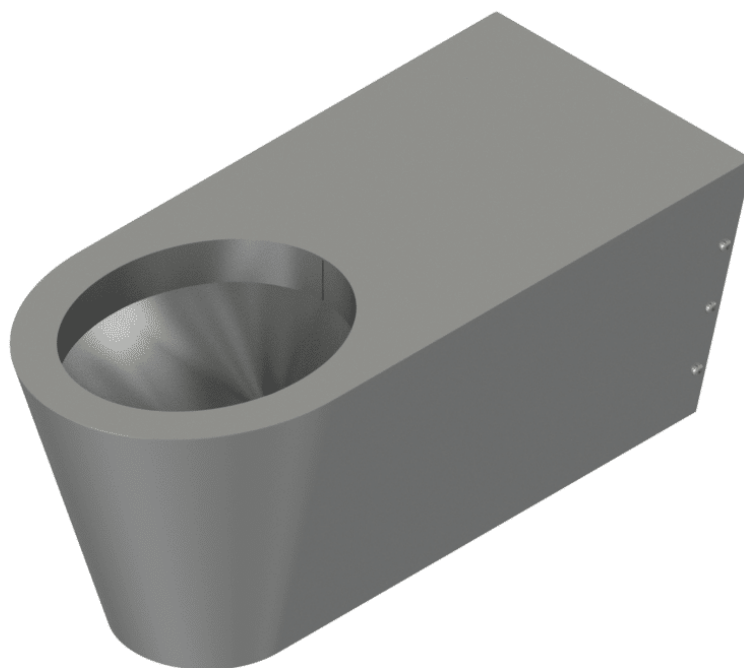
MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17659(SB)	B17659(SB) Wall Mounted Disabled WC Pan S-Trap Back-Entry	Flushing Inlet Orientation: Back Entry Trap Type: S-Trap
	Trap Type: S-Trap. Flushing Inlet Orientation: Back Entry.	
B17659(ST)	B17659(ST) Wall Mounted Disabled WC Pan S-Trap Top-Entry	Flushing Inlet Orientation: Top Entry Trap Type: S-Trap
	Trap Type: S-Trap. Flushing Inlet Orientation: Top Entry.	

03 Application information

Intended applications	Public Restrooms
Industries	Government & Public Sector

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images**PRODUCT IMAGE**

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.