

PRODUCT RANGE SPECIFICATION

B17710 – Stainless Steel Curved Back Urinal

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B17710{PSS}	DATA STATUS Published catalogue data	GENERATED ON 15 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	Wall-mounted Grade 304 stainless steel curved-back trough urinal with a concealed sparge pipe and a choice of waste outlet positions. This model serves as a direct replacement for outdated ceramic slab urinals, offering superior strength, hygiene, and ease of installation. Its one-piece welded construction eliminates joints and crevices, ensuring simple cleaning and maximum sanitation. The back of the unit is sound-deadened using a vermin-proof bitumastic coating, significantly reducing operational noise. The urinal features a curved back profile for ergonomic comfort, with an extended trough projection and sloped drip ledge to reduce splashback. A vandal-resistant, concealed sparge pipe ensures even flushing across the entire surface and protects internal plumbing from tampering. A 70 mm waste outlet can be configured in centre, left-hand, or right-hand positions, and the top water inlet supports both manual and automatic flush valves. For seamless installation, the B17710 comes standard with side ends incorporating a tiling key for wall-to-wall integration. Free-standing end panels (without tiling key) are optionally available. The unit is finished in a satin polish for a sleek, professional appearance and is available in a range of standard lengths.
---------------------	---

Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B17710 wall-mounted trough urinal; welded Grade 304 stainless steel; satin finish; concealed sparge pipe and top inlet for manual or automatic flushing; 70 mm waste outlet, centre/left/right as selected; sound-deadened back panel; integrated side ends with tiling key. Freestanding end panels optional; length as specified.
--------------------------	--

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17710(0915C)	Floor Mounted Curved Back Urinal Flush Valve Type to B17710{PSS} 915mm Length Centre Outlet	Length: 915 mm Waste Outlet Orientation: Centre
B17710(0915L)	Floor Mounted Curved Back Urinal Flush Valve Type to B17710{PSS} 915mm Length Left Hand Outlet	Length: 915 mm Waste Outlet Orientation: Left Hand Waste Outlet Orientation: Left-Hand
B17710(0915R)	Floor Mounted Curved Back Urinal Type Fv To B17710(pss) 915mm Right Hand Outlet	Length: 915 mm Waste Outlet Orientation: Right Hand Waste Outlet Orientation: Right-Hand

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17710(1065C)	B17710(1065C) Curved Back Trough Urinal 1065mm Length Centre Waste Outlet Length: 1065. Waste Outlet Orientation: Centre.	Length: 1065 mm Waste Outlet Orientation: Centre
B17710(1065L)	B17710(1065L) Curved Back Trough Urinal 1065mm Length Left-Hand Waste Outlet Length: 1065. Waste Outlet Orientation: Left Hand.	Length: 1065 mm Waste Outlet Orientation: Left Hand
B17710(1065R)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 1065MM RIGHT HAND OUTLET	Length: 1065 mm Waste Outlet Orientation: Right Hand Waste Outlet Orientation: Right-Hand
B17710(1220C)	Floor Mounted Curved Back Urinal Flush Valve Type to B17710{PSS} 1220mm Length Centre Outlet	Length: 1220 mm Waste Outlet Orientation: Centre Waste Outlet Orientation: Centre
B17710(1220L)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 1220MM LEFT HAND OUTLET	Length: 1220 mm Waste Outlet Orientation: Left Hand Waste Outlet Orientation: Left-Hand
B17710(1220R)	Floor Mounted Curved Back Urinal Type Fv To B17710(pss) 1220mm Right Hand Outlet	Length: 1220 mm Waste Outlet Orientation: Right Hand Waste Outlet Orientation: Right-Hand
B17710(1370C)	B17710(1370C) Curved Back Trough Urinal 1370mm Length Centre Waste Outlet Length: 1370. Waste Outlet Orientation: Centre.	Length: 1370 mm Waste Outlet Orientation: Centre
B17710(1370L)	Floor Mounted Curved Back Urinal Flush Valve	Length: 1370 mm Waste Outlet Orientation: Left Hand
B17710(1370R)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 1370MM RIGHT HAND OUTLET	Length: 1370 mm Waste Outlet Orientation: Right Hand Waste Outlet Orientation: Right-Hand
B17710(1525C)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 1525MM CENTRE OUTLET	Length: 1525 mm Waste Outlet Orientation: Centre Waste Outlet Orientation: Centre
B17710(1525L)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 1525MM LEFT HAND OUTLET	Length: 1525 mm Waste Outlet Orientation: Left Hand Waste Outlet Orientation: Left-Hand
B17710(1525R)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 1525MM RIGHT HAND OUTLET	Length: 1525 mm Waste Outlet Orientation: Right Hand
B17710(1675C)	FLOOR MOUNTED CURVED BACK URINAL	Length: 1675 mm Waste Outlet Orientation: Centre
B17710(1675L)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 1675MM LEFT HAND OUTLET	Length: 1675 mm Waste Outlet Orientation: Left Hand
B17710(1675R)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 1675MM RIGHT HAND OUTLET	Length: 1675 mm Waste Outlet Orientation: Right Hand Waste Outlet Orientation: Right-Hand

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17710(1830C)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 1830MM CENTRE OUTLET	Length: 1830 mm Waste Outlet Orientation: Centre Waste Outlet Orientation: Centre
B17710(1830L)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 1830MM LEFT HAND OUTLET	Length: 1830 mm Waste Outlet Orientation: Left Hand
B17710(1830R)	Floor Mounted Curved Back Urinal Type Fv To B17710(pss) 1830mm Right Hand Outlet	Length: 1830 mm Waste Outlet Orientation: Right Hand
B17710(2135C)	B17710(2135C) Curved Back Trough Urinal 2135mm Length Centre Waste Outlet Length: 2135. Waste Outlet Orientation: Centre.	Length: 2135 mm Waste Outlet Orientation: Centre
B17710(2135L)	FLOOR MOUNTED CURVED BACK URINAL 2135 LH	Length: 2135 mm Waste Outlet Orientation: Left Hand
B17710(2135R)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 2135MM RIGHT HAND OUTLET	Length: 2135 mm Waste Outlet Orientation: Right Hand
B17710(2440C)	Floor Mounted Curved Back Urinal Type Fv To B17710(pss) 24r0mm Centreoutlet	Length: 2440 mm Waste Outlet Orientation: Centre
B17710(2440L)	FLOOR MOUNTED CURVED BACK URINAL TYPE FV TO B17710(PSS) 24R0MM RIGHT HAND OUTLET	Length: 2440 mm Waste Outlet Orientation: Left Hand
B17710(2440R)	Floor Mounted Curved Back Urinal Type Fv To B17710(pss) 24r0mm Right Hand Outlet	Length: 2440 mm Waste Outlet Orientation: Right Hand


03 Application information

Intended applications	Public Restrooms
Industries	Government & Public Sector

04 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

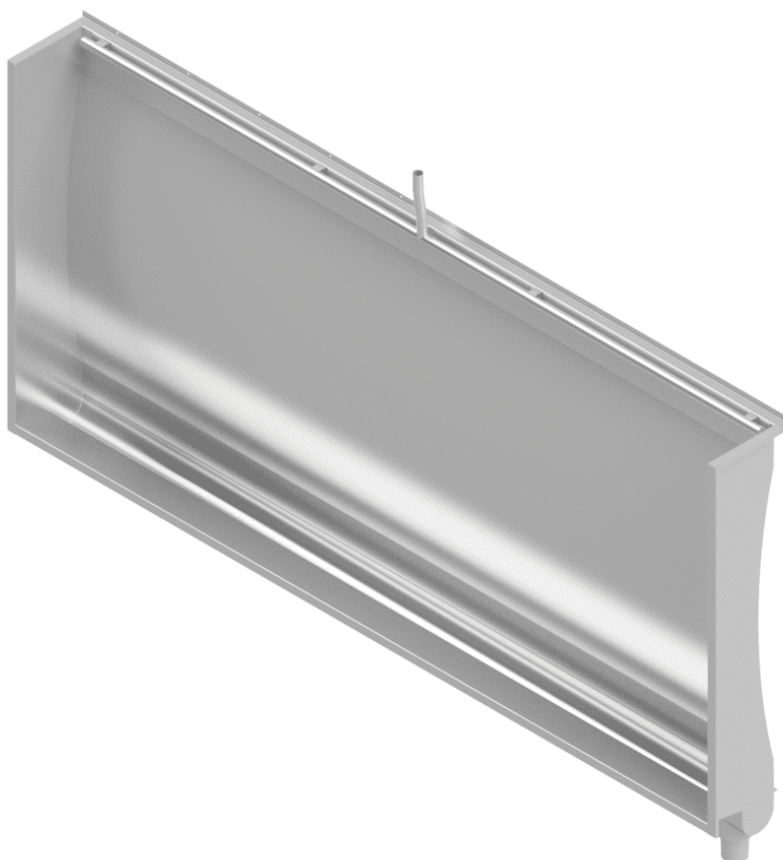**PRODUCT IMAGE**



PRODUCT IMAGE

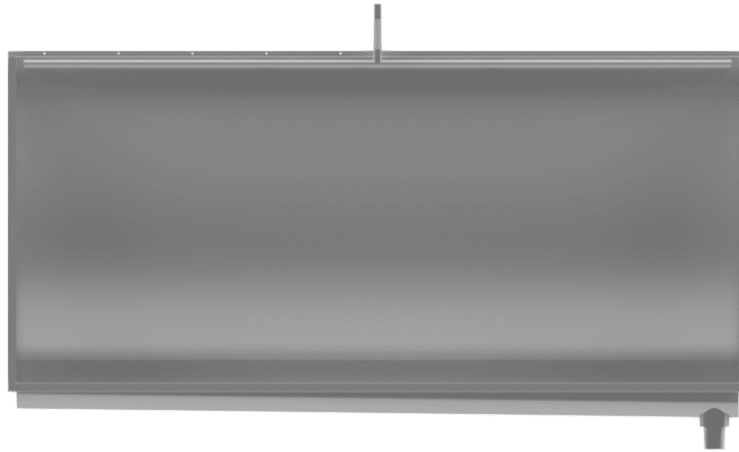

PRODUCT IMAGE



PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.