


PRODUCT RANGE SPECIFICATION

B17730 – Wall-Hung Stainless Steel Trough Urinal



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B17730{PSS}	DATA STATUS Published catalogue data	GENERATED ON 22 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	The Basterfield B17730 is a wall-hung trough urinal for public and commercial washrooms. It is manufactured from Grade 304 stainless steel with a dull polished finish, an exposed stainless steel sparge pipe, a sloped drip ledge and a sound-deadened back panel. Choose a 915, 1065, 1220, 1370, 1525, 1675, 1830, 2135 or 2440 mm length. Every length is available with a left- or right-hand 40 mm waste outlet. Match the selected outlet orientation to the site plumbing layout. The urinal is supplied as a manual flush-valve type. The Walcro 550URV 20 mm manual urinal flush valve is an optional, separately priced item; select one valve per urinal when this flushing arrangement is required. Confirm the water supply and connection layout before installation. Stainless steel support brackets are also optional and priced separately. The 400 mm finished-height bracket is suitable for junior primary school learners. The 600 mm finished-height bracket is suitable for senior primary school, high school and adult users. Select one bracket per urinal when bracket support is required.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B17730 wall-hung trough urinal; Grade 304 stainless steel with dull polished finish; exposed stainless steel sparge pipe; sound-deadened back panel; selected length; selected left- or right-hand 40 mm waste outlet. Support bracket and Walcro 550URV manual flush valve are optional and priced separately.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17730(0915L)	Wall-hung Grade 304 stainless steel trough urinal, 0915 mm length, left hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 915 mm Waste Outlet Orientation: Left Hand Overall dimensions: 915 × – × – mm (L × W × H)
B17730(0915R)	Wall-hung Grade 304 stainless steel trough urinal, 0915 mm length, right hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 915 mm Waste Outlet Orientation: Right Hand Overall dimensions: 915 × – × – mm (L × W × H)

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17730(1065L)	Wall-hung Grade 304 stainless steel trough urinal, 1065 mm length, left hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1065 mm Waste Outlet Orientation: Left Hand Overall dimensions: 1065 × – × – mm (L × W × H)
B17730(1065R)	Wall-hung Grade 304 stainless steel trough urinal, 1065 mm length, right hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1065 mm Waste Outlet Orientation: Right Hand Overall dimensions: 1065 × – × – mm (L × W × H)
B17730(1220L)	Wall-hung Grade 304 stainless steel trough urinal, 1220 mm length, left hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1220 mm Waste Outlet Orientation: Left Hand Overall dimensions: 1220 × – × – mm (L × W × H)
B17730(1220R)	Wall-hung Grade 304 stainless steel trough urinal, 1220 mm length, right hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1220 mm Waste Outlet Orientation: Right Hand Overall dimensions: 1220 × – × – mm (L × W × H)
B17730(1370L)	Wall-hung Grade 304 stainless steel trough urinal, 1370 mm length, left hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1370 mm Waste Outlet Orientation: Left Hand Overall dimensions: 1370 × – × – mm (L × W × H)
B17730(1370R)	Wall-hung Grade 304 stainless steel trough urinal, 1370 mm length, right hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1370 mm Waste Outlet Orientation: Right Hand Overall dimensions: 1370 × – × – mm (L × W × H)
B17730(1525L)	Wall-hung Grade 304 stainless steel trough urinal, 1525 mm length, left hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1525 mm Waste Outlet Orientation: Left Hand Overall dimensions: 1525 × – × – mm (L × W × H)
B17730(1525R)	Wall-hung Grade 304 stainless steel trough urinal, 1525 mm length, right hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1525 mm Waste Outlet Orientation: Right Hand Overall dimensions: 1525 × – × – mm (L × W × H)
B17730(1675L)	Wall-hung Grade 304 stainless steel trough urinal, 1675 mm length, left hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1675 mm Waste Outlet Orientation: Left Hand Overall dimensions: 1675 × – × – mm (L × W × H)
B17730(1675R)	Wall-hung Grade 304 stainless steel trough urinal, 1675 mm length, right hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1675 mm Waste Outlet Orientation: Right Hand Overall dimensions: 1675 × – × – mm (L × W × H)

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17730(1830L)	Wall-hung Grade 304 stainless steel trough urinal, 1830 mm length, left hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1830 mm Waste Outlet Orientation: Left Hand Overall dimensions: 1830 × – × – mm (L × W × H)
B17730(1830R)	Wall-hung Grade 304 stainless steel trough urinal, 1830 mm length, right hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 1830 mm Waste Outlet Orientation: Right Hand Overall dimensions: 1830 × – × – mm (L × W × H)
B17730(2135L)	Wall-hung Grade 304 stainless steel trough urinal, 2135 mm length, left hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 2135 mm Waste Outlet Orientation: Left Hand Overall dimensions: 2135 × – × – mm (L × W × H)
B17730(2135R)	Wall-hung Grade 304 stainless steel trough urinal, 2135 mm length, right hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 2135 mm Waste Outlet Orientation: Right Hand Overall dimensions: 2135 × – × – mm (L × W × H)
B17730(2440L)	Wall-hung Grade 304 stainless steel trough urinal, 2440 mm length, left hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 2440 mm Waste Outlet Orientation: Left Hand Overall dimensions: 2440 × – × – mm (L × W × H)
B17730(2440R)	Wall-hung Grade 304 stainless steel trough urinal, 2440 mm length, right hand 40 mm waste outlet. Manual flush valve and support bracket are optional and sold separately.	Length: 2440 mm Waste Outlet Orientation: Right Hand Overall dimensions: 2440 × – × – mm (L × W × H)

03 Functional features


01 Wall-hung installation	Wall-mounted trough design keeps the floor area below the urinal clear.
02 Grade 304 stainless steel	Grade 304 stainless steel construction with a dull polished finish for washroom use.
03 Exposed sparge pipe	An exposed stainless steel sparge pipe distributes flushing water along the trough.
04 Nine selectable lengths	Choose 915, 1065, 1220, 1370, 1525, 1675, 1830, 2135 or 2440 mm.
05 Left- or right-hand waste outlet	Select the 40 mm waste outlet orientation to suit the plumbing layout.
06 Optional supports and flush valve	Choose a 400 or 600 mm finished-height support bracket and a Walcro 550URV manual flush valve separately.

04 Application information


Intended applications	Public Restrooms
Industries	Colleges & Universities, Government & Public Sector, Hotels & Lodges, Restaurants & Cafés, Schools

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

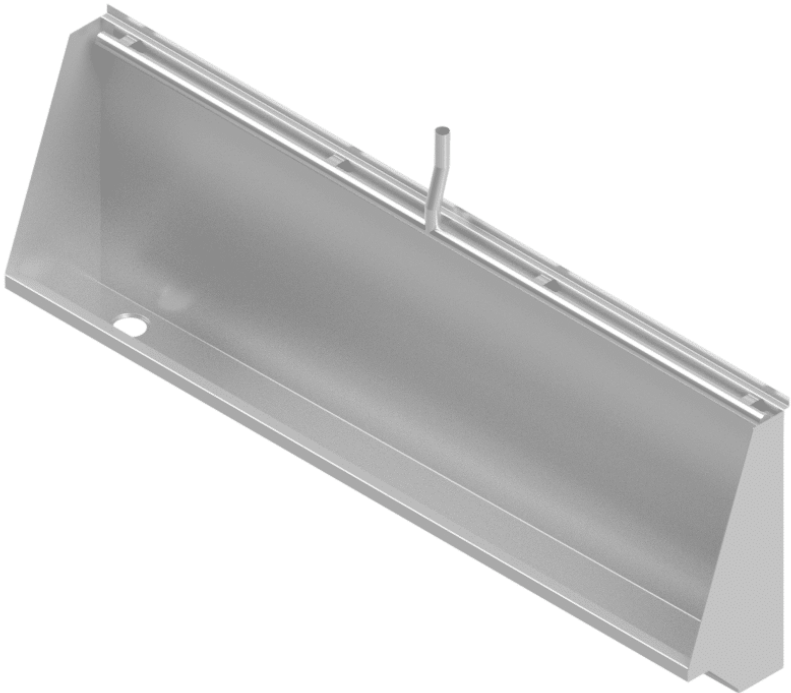

PRODUCT IMAGE

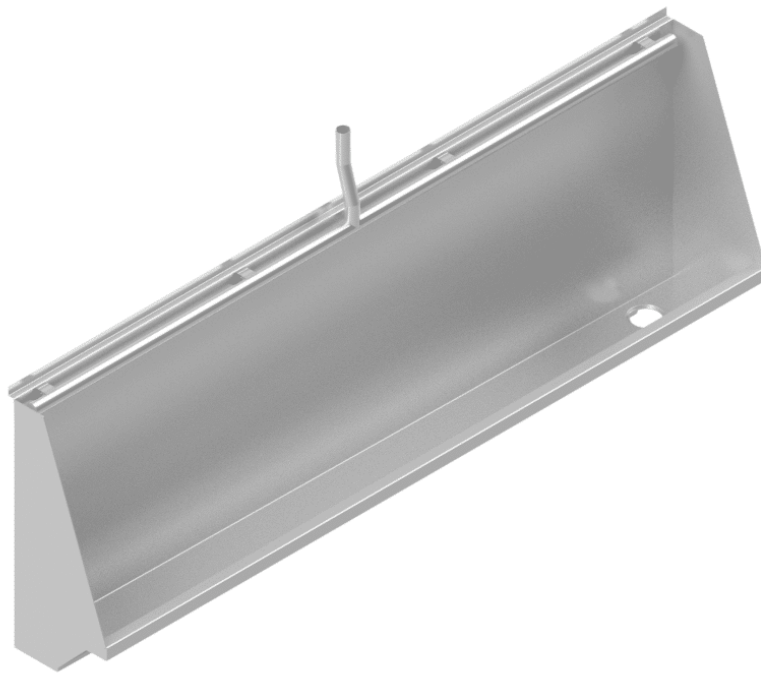

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.