

PRODUCT RANGE SPECIFICATION

B17730 – Stainless Steel Wall Hung Urinal Manual Flush Valve Type

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	B17730{PSS}	Published catalogue data	14 Sep 2026

01 Product description and specification

Product description	Wall-mounted Grade 304 stainless steel trough urinal for use with a manual flush valve in public and commercial washrooms. Manufactured from Grade 304 hygienic stainless steel, it provides exceptional resistance to corrosion, impact, and staining while delivering long-term performance with minimal upkeep. The wall-mounted design eliminates the need for floor support and tiling, reducing installation time and cost. The exposed stainless steel sparge pipe delivers uniform water distribution, ensuring effective rinsing and maintaining high hygiene standards. A top water inlet and 40 mm waste outlet (available in left- or right-hand configuration) support flexible plumbing integration. The ergonomic design features a sloped drip ledge and deep trough projection to minimize splashback and promote user hygiene. A sound-deadened back panel prevents drumming and noise during use. Integrated stainless steel end panels allow for flush wall fitting or standalone installation. Available in various lengths to suit different layouts, the B17730 can be paired with optional flush valves and cisterns upon request. The dull polished finish ensures an easy-to-clean, professional appearance, making it suited to schools, public facilities, and commercial washrooms.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B17730. Stainless Steel Wall Hung Urinal Manual Flush Valve Type. Waste Outlet Orientation: Left Hand, Right Hand. A top water inlet and 40 mm waste outlet (available in left- or right-hand configuration) support flexible plumbing integration. The ergonomic design features a sloped drip ledge and deep trough projection to minimize splashback and promote user hygiene.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17730(0915L)	WALL HUNG TROUGH URINAL 915 MM LH	Length: 915 mm Waste Outlet Orientation: Left Hand
B17730(0915R)	Wall Hung Trough Urinal 915mm Right Hand	Length: 915 mm Waste Outlet Orientation: Right Hand

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17730(1065L)	B17730(1065L) Wall Mounted Trough Urinal 1065mm Length Left-Hand Outlet with Exposed Sparge Pipe Length: 1065. Waste Outlet Orientation: Left Hand.	Length: 1065 mm Waste Outlet Orientation: Left Hand
B17730(1065R)	WALL HUNG TROUGH URINAL 1067 MM RH	Length: 1065 mm Waste Outlet Orientation: Right Hand
B17730(1220L)	WALL HUNG TROUGH URINAL TO B17730(PSS) 1220MM LH OUTLET	Length: 1220 mm Waste Outlet Orientation: Left Hand
B17730(1220R)	WALL HUNG TROUGH URINAL 1220MM RH OUTLET	Length: 1220 mm Waste Outlet Orientation: Right Hand
B17730(1370L)	WALL HUNG TROUGH URINAL 1370 MM LH	Length: 1370 mm Waste Outlet Orientation: Left Hand
B17730(1370R)	WALL HUNG TROUGH URINAL TO B17730(PSS) 1370MM RH OUTLET	Length: 1370 mm Waste Outlet Orientation: Right Hand
B17730(1525L)	WALL HUNG TROUGH URINAL 1525 MM LH OUTLET	Length: 1525 mm Waste Outlet Orientation: Left Hand
B17730(1525R)	Wall Hung Trough Urinal 1525 Mm Rh Outlet	Length: 1525 mm Waste Outlet Orientation: Right Hand
B17730(1675L)	WALL HUNG TROUGH URINAL 1675 MM LH OUTLET	Length: 1675 mm Waste Outlet Orientation: Left Hand
B17730(1675R)	Wall Hung Trough Urinal 1675 Mm Rh Outlet	Length: 1675 mm Waste Outlet Orientation: Right Hand
B17730(1830L)	WALL HUNG TROUGH URINAL 1830 MM LH OUTLET	Length: 1830 mm Waste Outlet Orientation: Left Hand
B17730(1830R)	WALL HUNG TROUGH URINAL 1830 MM RH OUTLET	Length: 1830 mm Waste Outlet Orientation: Right Hand
B17730(2135L)	WALL HUNG TROUGH URINAL 2135 MM LH OUTLET	Length: 2135 mm Waste Outlet Orientation: Left Hand
B17730(2135R)	WALL HUNG TROUGH URINAL 2135 MM RH OUTLET	Length: 2135 mm Waste Outlet Orientation: Right Hand
B17730(2440L)	Wall Hung Trough Urinal 2440 Mm Lh	Length: 2440 mm Waste Outlet Orientation: Left Hand
B17730(2440R)	Wall Hung Trough Urinal 2440 Mm Rh Outlet	Length: 2440 mm Waste Outlet Orientation: Right Hand


03 Application information


Intended applications	Public Restrooms
Industries	Government & Public Sector

04 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

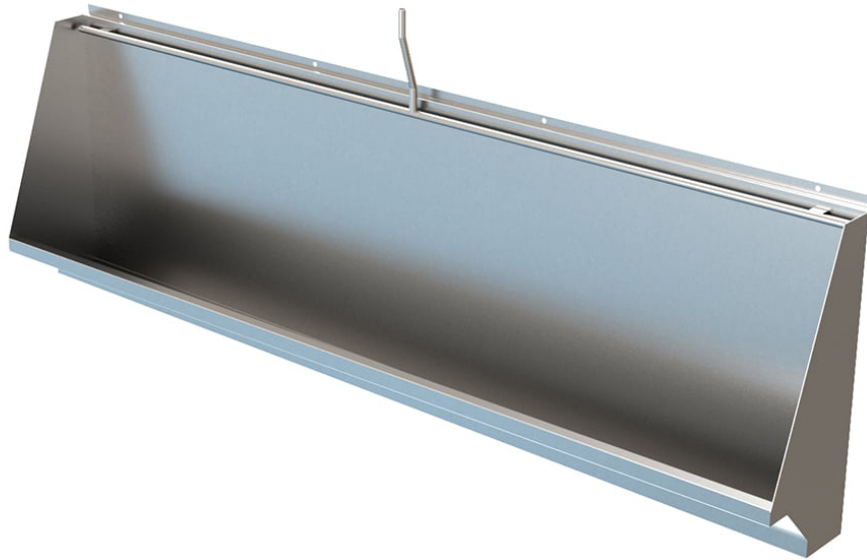**PRODUCT IMAGE**

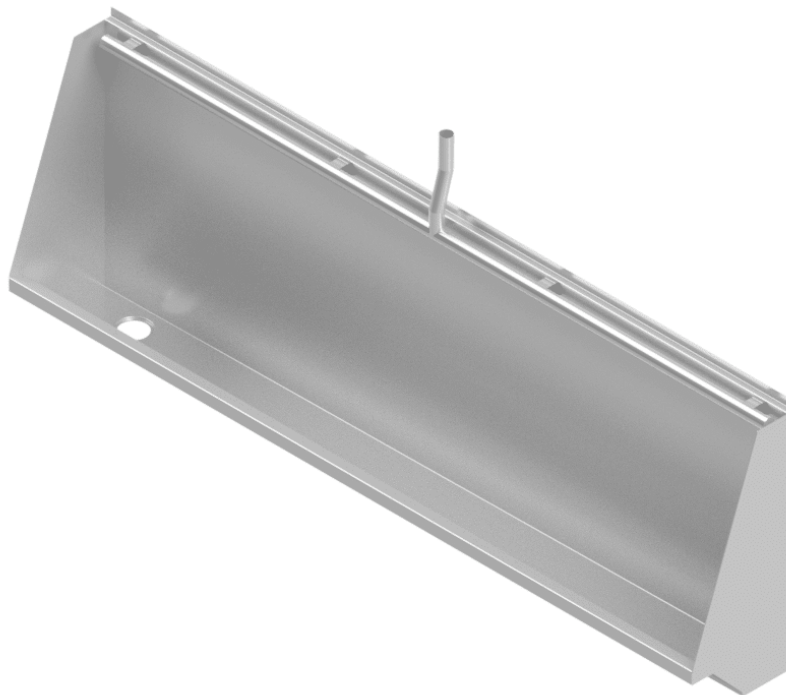

PRODUCT IMAGE

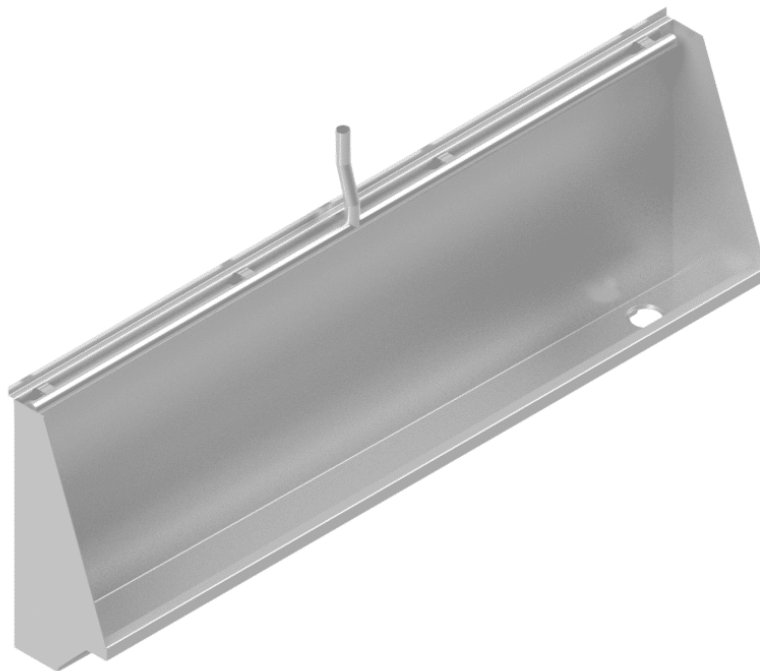

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.