
MODEL SPECIFICATION

B17740(1370R) – Urinal Trough 1370mm Length Right-Hand Auto Flush

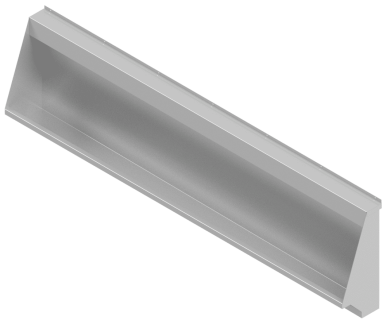

PRODUCT IMAGE

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Model	B17740(1370R){PSS}	14 Nov 2026

01 Model specification

Trough Urinal, Grade 304 Stainless Steel, 1.2mm Material Thickness, 1370mm Length, with Wall Mounting, Automatic Tipping-Tray Flushing, 12mm Adjustable Drip Cock, Dull Polished Finish, Ø40mm Right-Hand Waste Outlet

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Length	1370	mm	The length of the item typically as measured from left to right.
Waste Outlet Orientation	Right Hand	–	–

03 Model and supply data

Parent product	B17740 — Wall-Mounted Automatic Flush Trough Urinal
Typical lead time	10–15 working days
Warranty	12 months

04 Specification notes

Configuration description

The B17740 wall-mounted trough urinal uses an automatic tipping-tray flushing system. An adjustable drip cock fills the tray; when full, the tray tips and releases water across the urinal.

The unit is manufactured from 1.2 mm Grade 304 stainless steel with a dull polished finish. End panels, a sloped drip ledge, extended trough projection and a sound-deadened back panel form part of the construction.

Select the required length and left- or right-hand position for the 40 mm waste outlet. The unit is wall mounted using its fixing provisions.

This configuration is 1370mm long with a right-hand waste outlet. A 12mm adjustable drip cock is specified for this item.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this model.

Basterfield B17740(1370R). Wall-Mounted Automatic-Flush Trough Urinal; Grade 304 Stainless Steel; 1.2mm Material Thickness; 1370mm Length; Right-Hand Ø40mm Waste Outlet; Dull Polished Finish; Tipping Tray and 12mm Adjustable Drip Cock.

Detailed specification

- Model and Item Code: B17740(1370R)
- Material: Stainless Steel Grade 304
- Material Thickness: 1.2mm
- Length: 1370mm
- Waste Outlet Orientation: Right-Hand
- Waste Outlet: Ø40mm
- Mounting: Wall Mounted
- Finish: Dull Polished
- Flushing: Automatic Tipping Tray
- Water Control: 12mm Adjustable Drip Cock

05 Frequently asked questions

Which waste fittings and discharge pipework must be supplied separately?

Installation requires one 1½″ BSP waste outlet fitting per urinal, a compatible P-trap (typically PVC), and discharge piping. These components are excluded from the urinal price and must be arranged separately unless expressly included as separate items in the quotation.

What water supply pipework is required for installation?

Provide water supply piping to the adjustable drip cock on each urinal. The drip cock fills the automatic tipping tray, which tips when full to flush the urinal. Water supply piping is excluded from the urinal price and must be arranged separately.

Does the B17740 require a separate flush valve?

No. The B17740 uses an automatic tipping-tray flushing mechanism supplied by an adjustable drip cock. It requires a water supply connection to the drip cock rather than a separate manual flush valve.

E&OE. Specifications are subject to change without notice.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357