
MODEL SPECIFICATION

# B17740(1370L) – Urinal Trough 1370mm Length Left-Hand Auto Flush

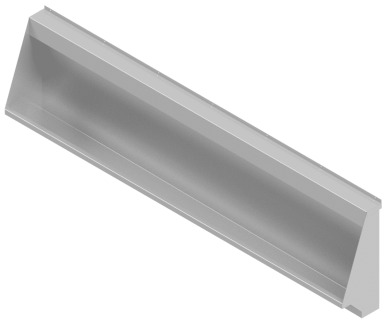

PRODUCT IMAGE

| DOCUMENT SCOPE | DOCUMENT REFERENCE | GENERATED ON |
|---|---|---|
| Model | B17740(1370L){PSS} | 14 Nov 2026 |

## 01 Model specification

Trough Urinal, Grade 304 Stainless Steel, 1.2mm Material Thickness, 1370mm Length, with Wall Mounting, Automatic Tipping-Tray Flushing, Adjustable Drip Cock, Dull Polished Finish, Ø40mm Left-Hand Waste Outlet

## 02 Technical specifications

| PARAMETER | VALUE | UNIT | TECHNICAL NOTE |
|---|---|---|---|
| Length | 1370 | mm | The length of the item typically as measured from left to right. |
| Waste Outlet Orientation | Left Hand | – | – |

## 03 Model and supply data

| | |
|---|---|
| Parent product | B17740 — Wall-Mounted Automatic Flush Trough Urinal |
| Typical lead time | 10–15 working days |
| Warranty | 12 months |

## 04 Specification notes

**Configuration description**

The B17740 wall-mounted trough urinal uses an automatic tipping-tray flushing system. An adjustable drip cock fills the tray; when full, the tray tips and releases water across the urinal.

The unit is manufactured from 1.2 mm Grade 304 stainless steel with a dull polished finish. End panels, a sloped drip ledge, extended trough projection and a sound-deadened back panel form part of the construction.

Select the required length and left- or right-hand position for the 40 mm waste outlet. The unit is wall mounted using its fixing provisions.

This configuration is 1370mm long with a left-hand waste outlet.


121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

| | |
|---|---|
| **Short Form Specification** | **SPECIFICATION USE**<br>Use this description when specifying this model.<br><br>Basterfield B17740(1370L). Wall-Mounted Automatic-Flush Trough Urinal; Grade 304 Stainless Steel; 1.2mm Material Thickness; 1370mm Length; Left-Hand Ø40mm Waste Outlet; Dull Polished Finish; Tipping Tray and Adjustable Drip Cock. |
| **Detailed specification** | • Model and Item Code: B17740(1370L)<br>• Material: Stainless Steel Grade 304<br>• Material Thickness: 1.2mm<br>• Length: 1370mm<br>• Waste Outlet Orientation: Left-Hand<br>• Waste Outlet: Ø40mm<br>• Mounting: Wall Mounted<br>• Finish: Dull Polished<br>• Flushing: Automatic Tipping Tray<br>• Water Control: Adjustable Drip Cock |

## 05 Frequently asked questions

**Which waste fittings and discharge pipework must be supplied separately?**

Installation requires one 1½″ BSP waste outlet fitting per urinal, a compatible P-trap (typically PVC), and discharge piping. These components are excluded from the urinal price and must be arranged separately unless expressly included as separate items in the quotation.

**What water supply pipework is required for installation?**

Provide water supply piping to the adjustable drip cock on each urinal. The drip cock fills the automatic tipping tray, which tips when full to flush the urinal. Water supply piping is excluded from the urinal price and must be arranged separately.

**Does the B17740 require a separate flush valve?**

No. The B17740 uses an automatic tipping-tray flushing mechanism supplied by an adjustable drip cock. It requires a water supply connection to the drip cock rather than a separate manual flush valve.

E&OE. Specifications are subject to change without notice.