
PRODUCT RANGE SPECIFICATION

B17740 – Wall-Mounted Automatic Flush Trough Urinal



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B17740{PSS}	14 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b17740-wall-mounted-automatic-flush-trough-urinal#specifications

01 Product description and specification

Product description	Grade 304 stainless steel automatic-flush trough urinal with a tipping tray, wall mounting and a choice of lengths and waste outlet positions.
Short Form Specification	**SPECIFICATION USE** Use this description when specifying this product range. Basterfield B17740. Grade 304 stainless steel automatic-flush trough urinal; 1.2 mm construction; dull polished finish; tipping tray and adjustable drip cock; wall mounting; 40 mm waste outlet. Length and outlet position as selected.

02 Configuration options

Length	915 mm; 1065 mm; 1370 mm; 1525 mm; 1675 mm; 1830 mm; 2135 mm; 2440 mm
Waste Outlet Orientation	Left Hand; Right Hand

Options vary by model; not every combination is available. Use the product page to select a model.

03 Application information

Intended applications	Public Restrooms
Industries	Government & Public Sector, Schools

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

05 Frequently asked questions

Which waste fittings and discharge pipework must be supplied separately?

Installation requires one 1½″ BSP waste outlet fitting per urinal, a compatible P-trap (typically PVC), and discharge piping. These components are excluded from the urinal price and must be arranged separately unless expressly included as separate items in the quotation.


What water supply pipework is required for installation?

Provide water supply piping to the adjustable drip cock on each urinal. The drip cock fills the automatic tipping tray, which tips when full to flush the urinal. Water supply piping is excluded from the urinal price and must be arranged separately.

Does the B17740 require a separate flush valve?


No. The B17740 uses an automatic tipping-tray flushing mechanism supplied by an adjustable drip cock. It requires a water supply connection to the drip cock rather than a separate manual flush valve.

Product drawings and images

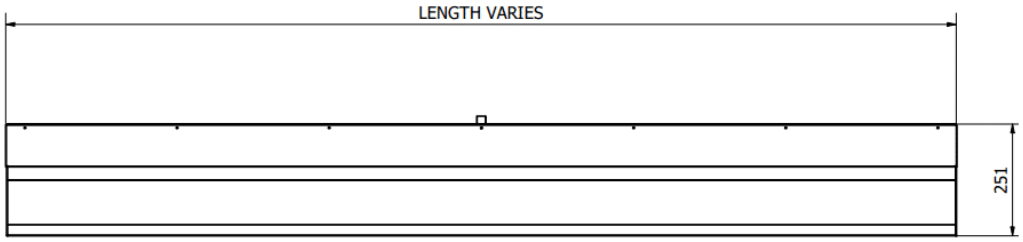


TOP


PRODUCT IMAGE

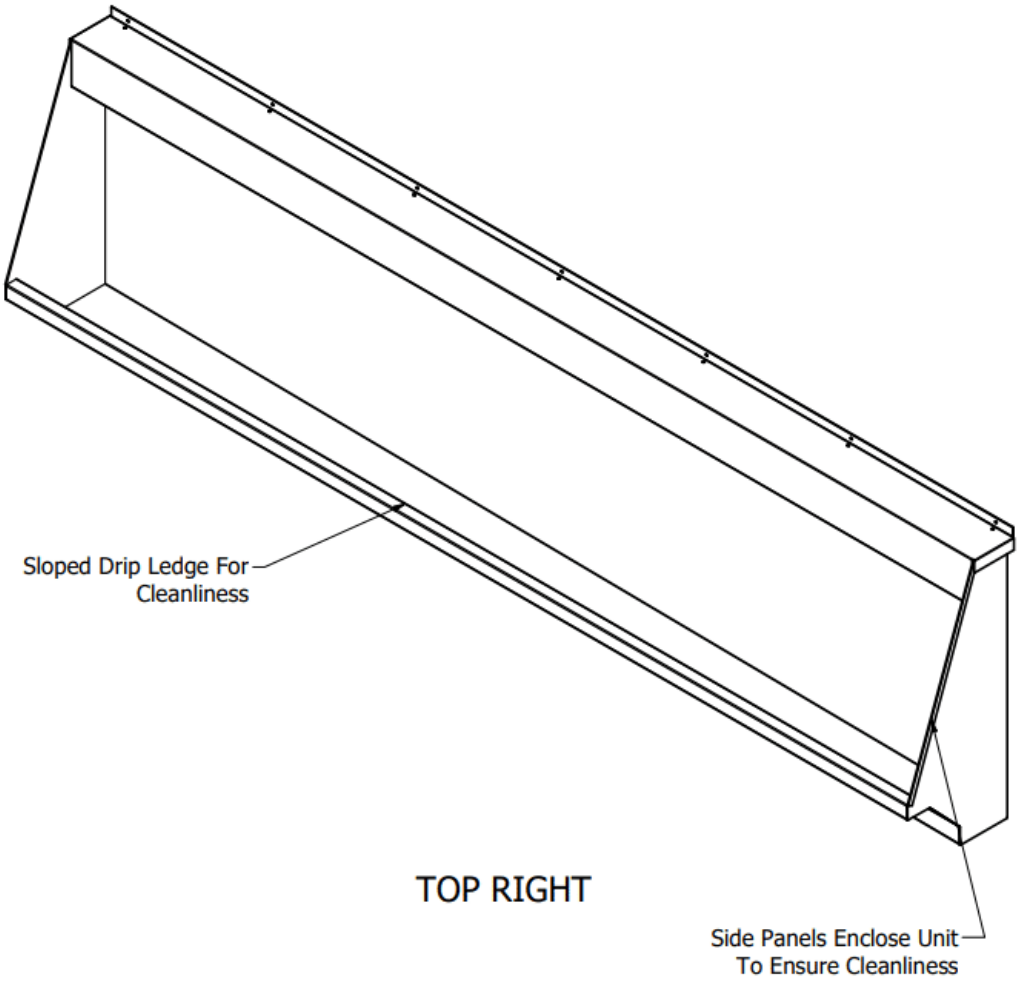

PRODUCT IMAGE

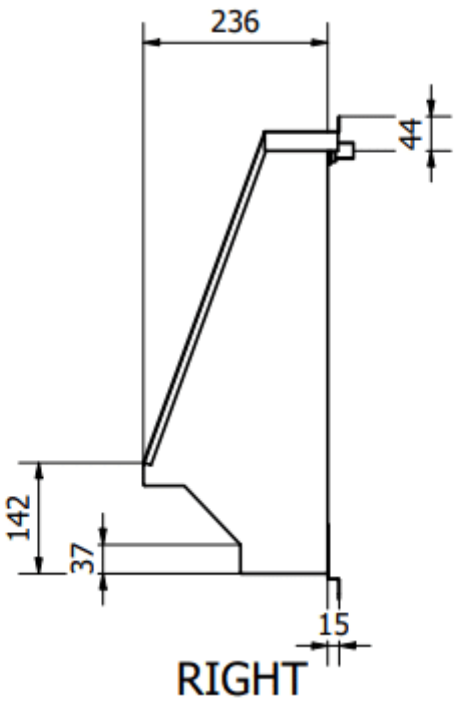

PRODUCT IMAGE

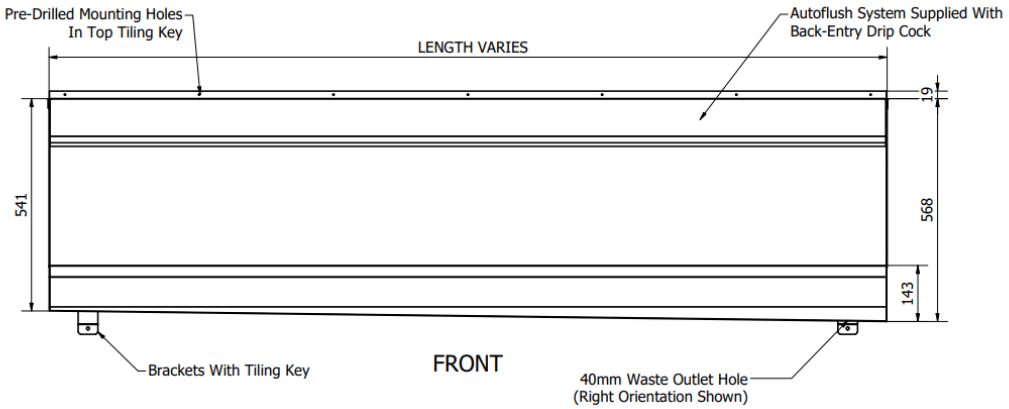

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.