

PRODUCT RANGE SPECIFICATION

B17740 – Wall-Mounted Automatic Flush Trough Urinal

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B17740{PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	The B17740 wall-mounted trough urinal uses an automatic tipping-tray flushing system. An adjustable drip cock fills the tray; when full, the tray tips and releases water across the urinal. The unit is manufactured from 1.2 mm Grade 304 stainless steel with a dull polished finish. End panels, a sloped drip ledge, extended trough projection and a sound-deadened back panel form part of the construction. Select the required length and left- or right-hand position for the 40 mm waste outlet. The unit is wall mounted using its fixing provisions.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B17740. Grade 304 stainless steel automatic-flush trough urinal; 1.2 mm construction; dull polished finish; tipping tray and adjustable drip cock; wall mounting; 40 mm waste outlet. Length and outlet position as selected.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17740(0915L)	B17740(0915L) Wall Mounted Trough Urinal 915mm Length Left-Hand Outlet with Auto Flushing Mechanism Length: 915. Waste Outlet Orientation: Left Hand.	Length: 915 mm Waste Outlet Orientation: Left Hand
B17740(0915R)	Wall Hung Trough Urinal 915mm Length Right	Length: 915 mm Waste Outlet Orientation: Right Hand
B17740(1065L)	B17740(1065L) Wall Mounted Trough Urinal 1065mm Length Left-Hand Outlet with Auto Flushing Mechanism Length: 1065. Waste Outlet Orientation: Left Hand.	Length: 1065 mm Waste Outlet Orientation: Left Hand
B17740(1065R)	Wall Hung Trough Urinal 1065mm	Length: 1065 mm Waste Outlet Orientation: Right Hand
B17740(1370L)	WALL MOUNTED URINAL AFT 1370MM LH	Length: 1370 mm Waste Outlet Orientation: Left Hand
B17740(1370R)	WALL HUNG TROUGH URINAL 1370 MM RH WITH AUTO-FLUSHING TANK AND 12MM ADJUSTABLE DRIP COCK	Length: 1370 mm Waste Outlet Orientation: Right Hand Waste Outlet Orientation: Right-Hand

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17740(1525L)	Wall Hung Trough Urinal 1525mm Length Left Hand	Length: 1525 mm Waste Outlet Orientation: Left Hand
B17740(1525R)	Wall Hung Trough Urinal Aft 1525mm Rh Outlet	Length: 1525 mm Waste Outlet Orientation: Right Hand
B17740(1675L)	Wall Hung Trough Urinal 1675mm Length	Length: 1675 mm Waste Outlet Orientation: Left Hand
B17740(1675R)	Wall Hung Trough Urinal 1675mm Length - Copy	Length: 1675 mm Waste Outlet Orientation: Right Hand
B17740(1830L)	WALL HUNG TROUGH URINAL 1830 MM LEFT HAND AFT	Length: 1830 mm Waste Outlet Orientation: Left Hand
B17740(1830R)	Wall Mounted Urinal Aft 1830mm Rh	Length: 1830 mm Waste Outlet Orientation: Right Hand
B17740(2135L)	B17740(2135L) Wall Mounted Trough Urinal 2135mm Length Left-Hand Outlet with Auto Flushing Mechanism Length: 2135. Waste Outlet Orientation: Left Hand.	Length: 2135 mm Waste Outlet Orientation: Left Hand
B17740(2135R)	WALL HUNG TROUGH URINAL TO B17732(PSS) WITH AUTO-FLUSHING TIPPING TANK AND 12MM ADJUSTABLE DRIP COCK 2135MM	Length: 2135 mm Waste Outlet Orientation: Right Hand
B17740(2440L)	B17740(2440L) Wall Mounted Trough Urinal 2440mm Length Left-Hand Outlet with Auto Flushing Mechanism Length: 2440. Waste Outlet Orientation: Left Hand.	Length: 2440 mm Waste Outlet Orientation: Left Hand
B17740(2440R)	WALL HUNG TROUGH URINAL AUTOMATIC FLUSHING TANK 2440MM RH OUTLET	Length: 2440 mm Waste Outlet Orientation: Right Hand


03 Application information


Intended applications	Public Restrooms
Industries	Government & Public Sector

04 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

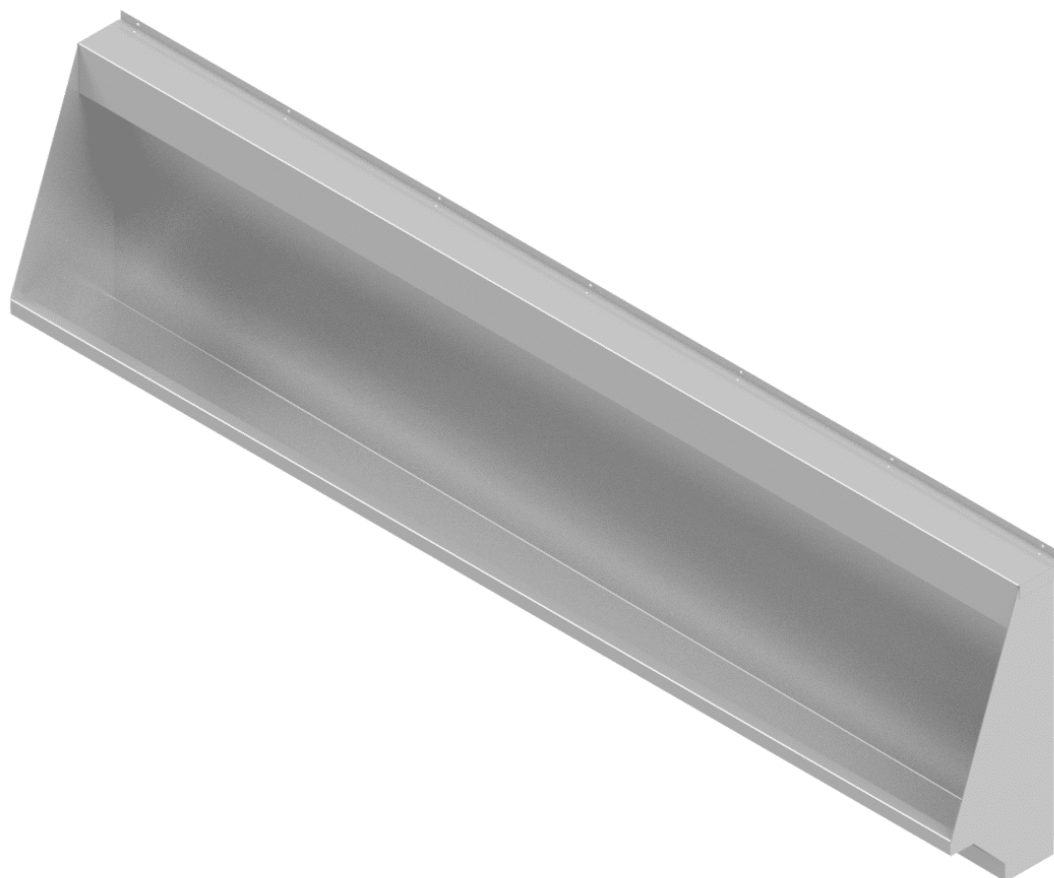
**PRODUCT IMAGE**

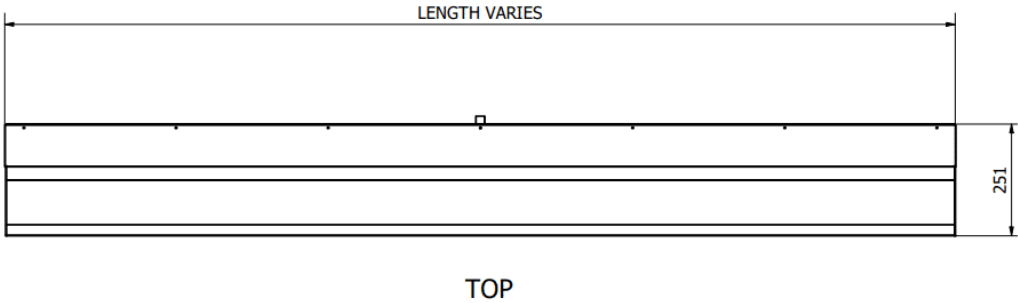


PRODUCT IMAGE

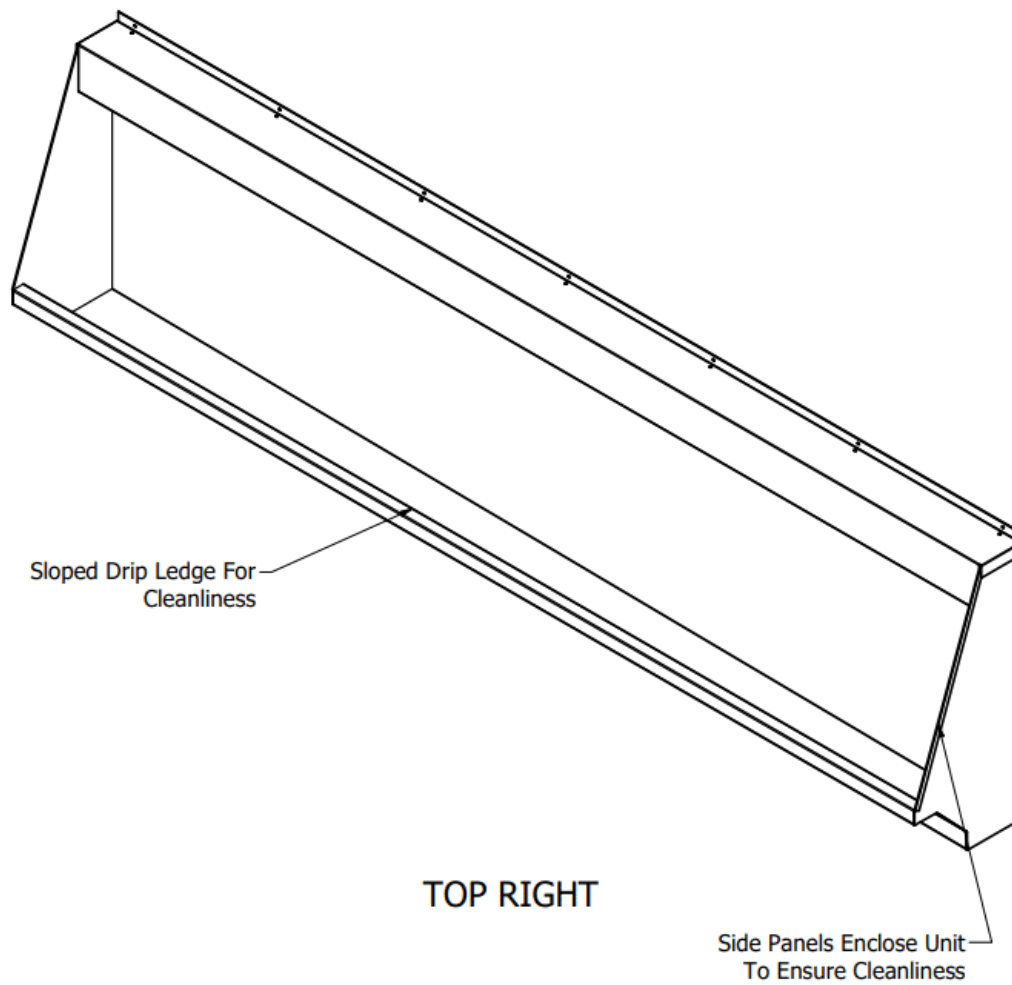

PRODUCT IMAGE

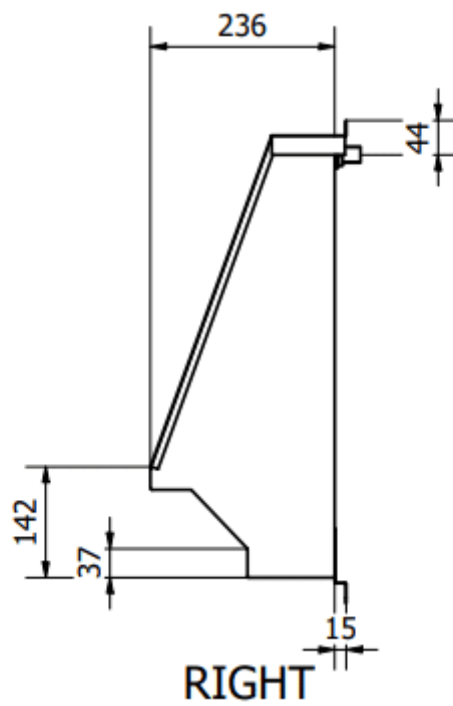

PRODUCT IMAGE

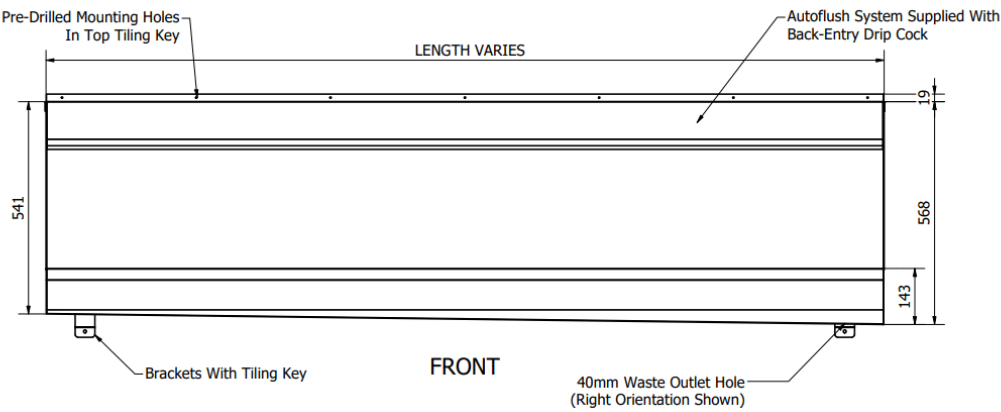

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.