
PRODUCT RANGE SPECIFICATION

B17743(B) – Security Bowl Urinal Back Entry



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B17743(B){PSS}	13 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b17743b-security-bowl-urinal-back-entry#specifications

01 Product description and specification

Product description	Stainless steel security bowl urinal with a back-entry brass flush coupling, rear waste connection and integral mounting lugs.
Short Form Specification	**SPECIFICATION USE** Use this description when specifying this product range. Basterfield B17743(B) security bowl urinal; stainless steel; back-entry brass flush coupling; integrated flush spreader; welded-in perforated waste outlet; integral 40 mm rear stainless steel waste connection; mounting lugs with Ø10 mm bolt holes. PVC trap and plumbing fittings supplied separately. Recorded dimensions: 350 mm (L, including lugs), 300 mm (W, excluding lugs), 232 mm front-to-back and 480 mm (H).

02 Functional features

01 **Back-Entry Plumbing**
A brass back-entry flush coupling and rear waste connection support a concealed plumbing layout.

02 **Welded-In Waste Outlet**
The perforated stainless steel waste outlet is welded into the bowl.

03 **Integral Mounting Lugs**
Pre-punched Ø10 mm bolt holes are provided in the mounting lugs for the recorded wall-fixing arrangement.

03 Application information

Intended applications	Secure Ablutions
Industries	Prisons & Detention Facilities

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

05 Frequently asked questions

Which model code should I quote?

Quote B17743(B) for this back-entry security bowl urinal.

What flush connection is provided?

The bowl is supplied with a brass back-entry flush coupling for connection to a concealed flush pipe or flush valve. Confirm the complete flush-system arrangement in the quotation.


What waste connection is provided?

An integral 40 mm stainless steel waste outlet extends to the rear. The PVC trap and plumbing fittings are supplied separately.


How is the urinal mounted?

Integral mounting lugs have pre-punched Ø10 mm bolt holes. Coordinate wall support and fixings with the installation; the recorded detail allows the lugs to be plastered over after fixing.


Product drawings and images

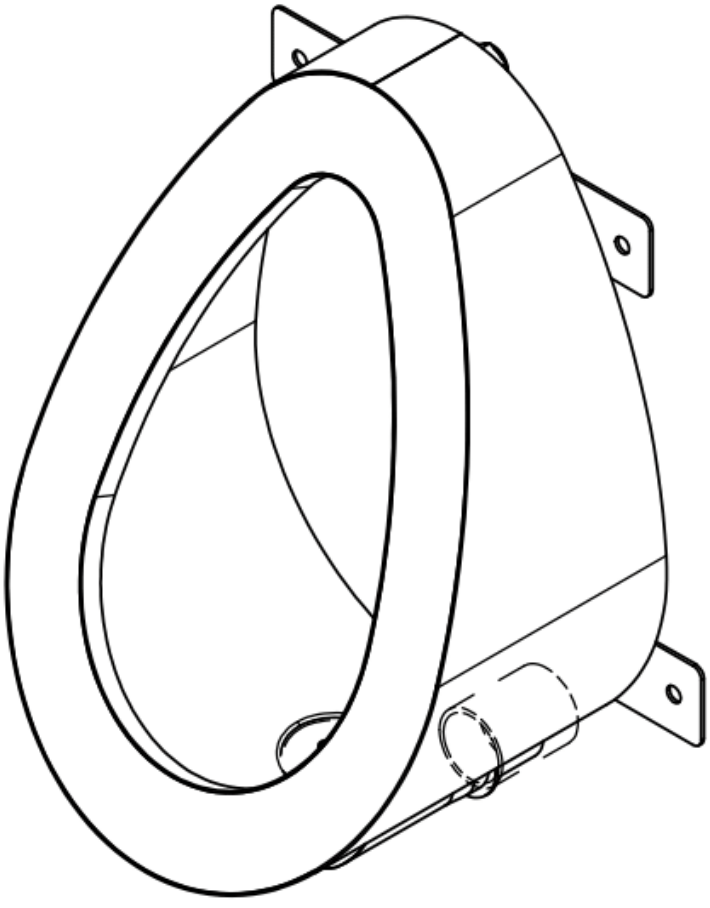


PRODUCT IMAGE

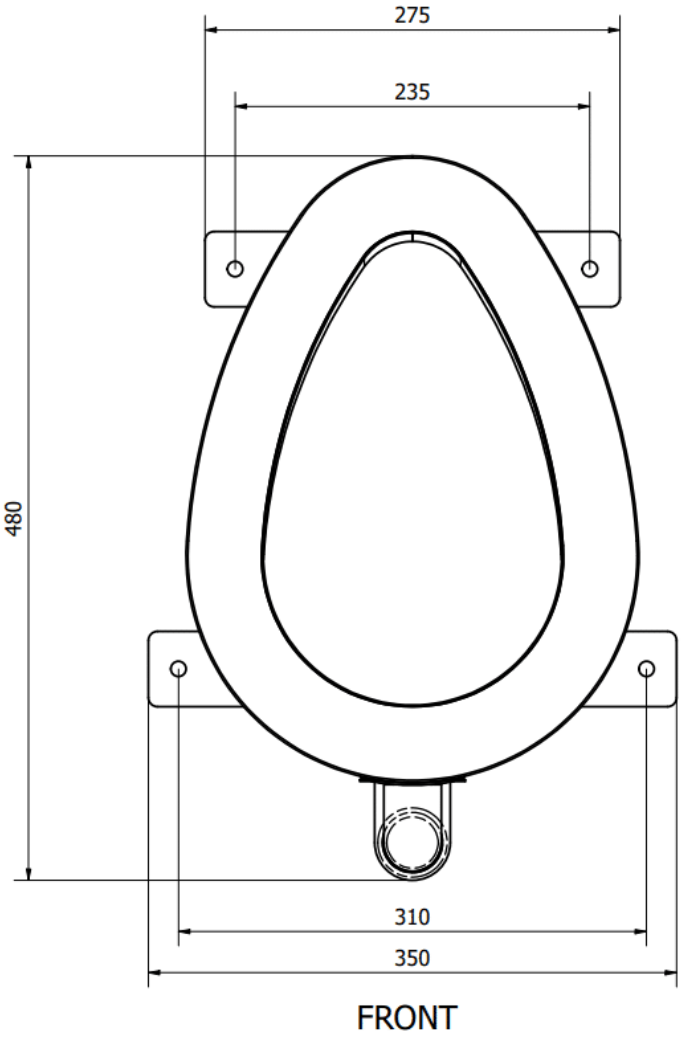

PRODUCT IMAGE

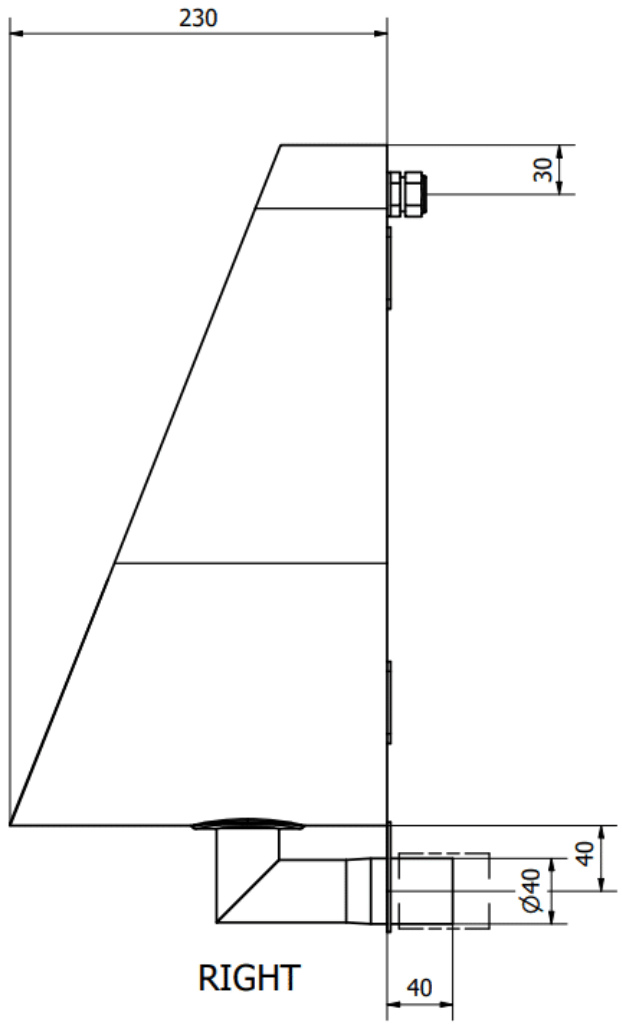

PRODUCT IMAGE

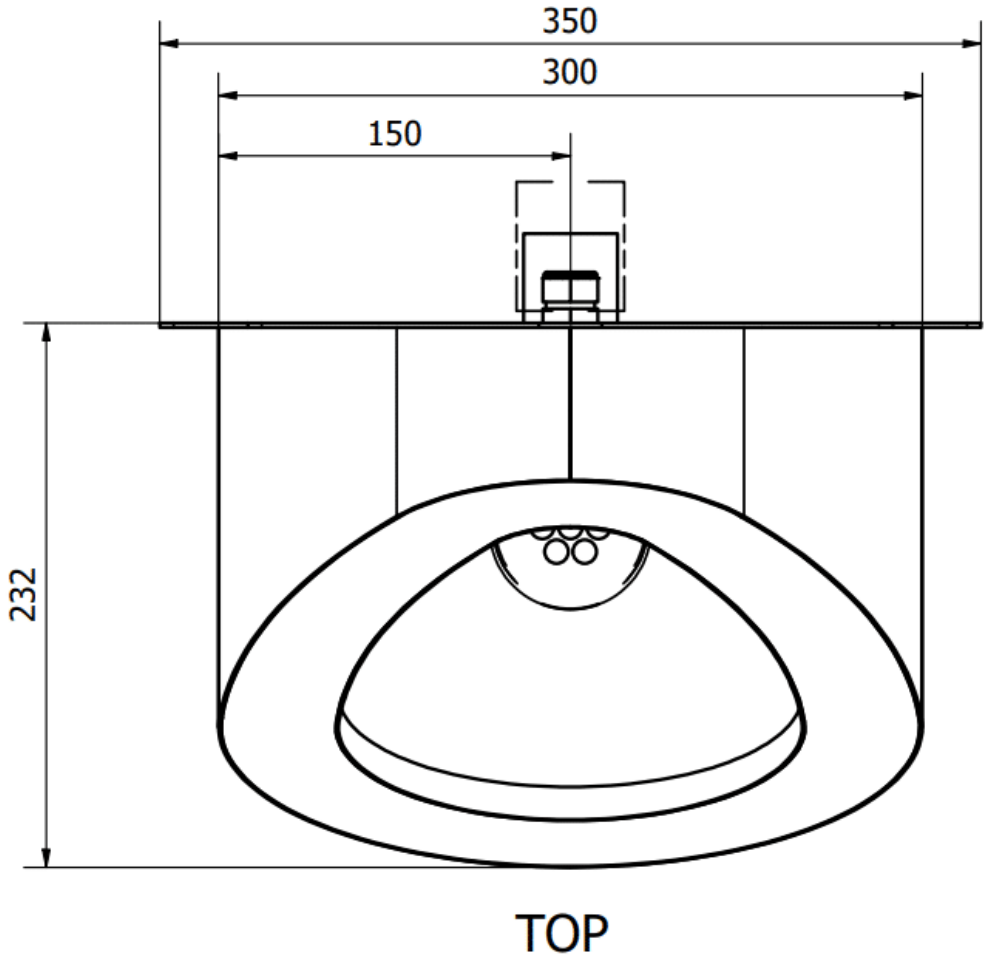

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.