


PRODUCT RANGE SPECIFICATION

B17744 – Bowl Urinals



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	B17744{PSS}	Published catalogue data	4 Oct 2026

01 Product description and specification

Product description	The Basterfield B17744 is a wall-mounted bowl urinal for individual use in public and commercial washrooms. Grade 304 stainless steel construction, a one-piece bowl, a smooth polished interior and a satin exterior support routine cleaning and daily use. Integral mounting brackets secure the bowl to the wall. Choose the inlet arrangement to suit the plumbing layout. B17744(B) has back entry for concealed pipework. B17744(T) has top entry for an exposed flush connection. Both models include a brass flush coupling, a flush spreader and a 40 mm waste opening at the base. The waste opening describes the bowl aperture; confirm the required waste fitting and trap when specifying the installation. For B17744(B), the recommended optional flush system is B17744(155UW), a concealed back-entry 15 mm push-button system. For B17744(T), specify one O4VF_WAL-103LUR Walcro lever-operated valve together with one O4VFP-UR15TP offset flush pipe per bowl. When selecting the top-entry valve, include the offset pipe. Flushing accessories are supplied and priced separately from the bowl. Typical applications include public restrooms, school and university washrooms, restaurant ablutions and other commercial facilities. Confirm wall support, inlet alignment, waste connections and the selected valve's operating requirements before installation. The bowl urinal is designed and manufactured in South Africa.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B17744 wall-mounted bowl urinal in Grade 304 stainless steel; integral mounting brackets; one-piece bowl with polished interior and satin exterior; brass flush coupling and flush spreader; 40 mm waste opening. Select B17744(B) back entry or B17744(T) top entry. Optional flush systems are specified separately.

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17744(B)	Basterfield B17744(B) Wall-Mounted Grade 304 Stainless Steel Bowl Urinal to B17744{PSS}, Back Entry, Integral Brackets, Brass Flush Coupling, Flush Spreader and 40 mm Waste Opening. Recommended Optional Flush System: B17744(155UW), Concealed Back Entry, 15 mm, One per Bowl. Accessories Priced Separately.	Flushing Inlet Orientation: Back Entry
B17744(T)	Basterfield B17744(T) Wall-Mounted Grade 304 Stainless Steel Bowl Urinal to B17744{PSS}, Top Entry, Integral Brackets, Brass Flush Coupling, Flush Spreader and 40 mm Waste Opening. Recommended Optional Flushing: One 04VF_WAL-103LUR Valve with One 04VFP-UR15TP Offset Pipe per Bowl. Include the Pipe When Selecting the Valve. Accessories Priced Separately.	Flushing Inlet Orientation: Top Entry

03 Functional features

01	Grade 304 stainless steel Stainless steel bowl for daily public and commercial washroom use.
02	Wall-mounted installation Integral mounting brackets support wall installation.
03	Smooth bowl surfaces One-piece bowl with polished interior and satin exterior.
04	Two inlet arrangements Choose back entry for concealed pipework or top entry for an exposed connection.
05	Flush coupling and spreader Brass coupling and flush spreader form part of the bowl arrangement.
06	40 mm waste opening Base aperture for the specified waste fitting and trap arrangement.
07	Model-specific optional flushing Back entry: B17744(155UW). Top entry: one 103LUR valve together with one UR15TP offset pipe.


04 Application information


Intended applications	Public Restrooms
Industries	Colleges & Universities, Government & Public Sector, Hotels & Lodges, Restaurants & Cafés, Schools

05 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

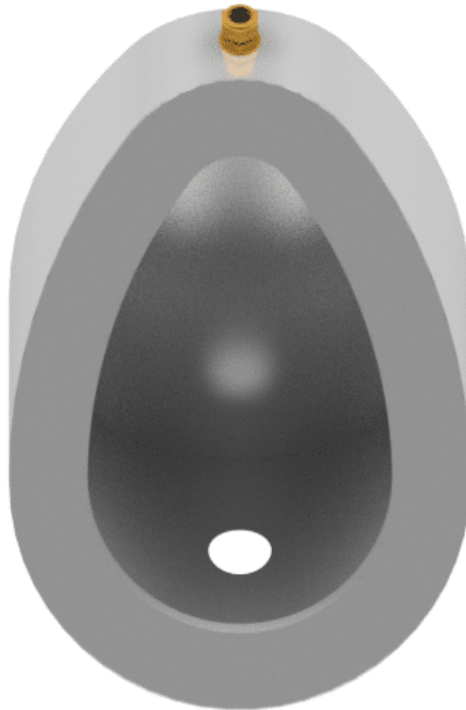
**PRODUCT IMAGE**

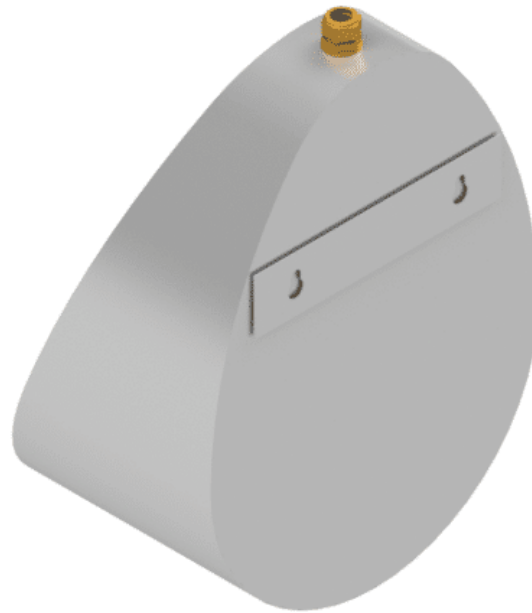

PRODUCT IMAGE

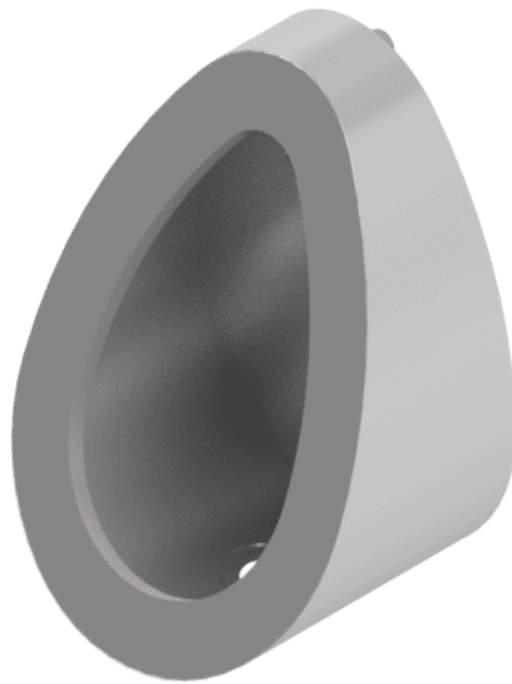


PRODUCT IMAGE

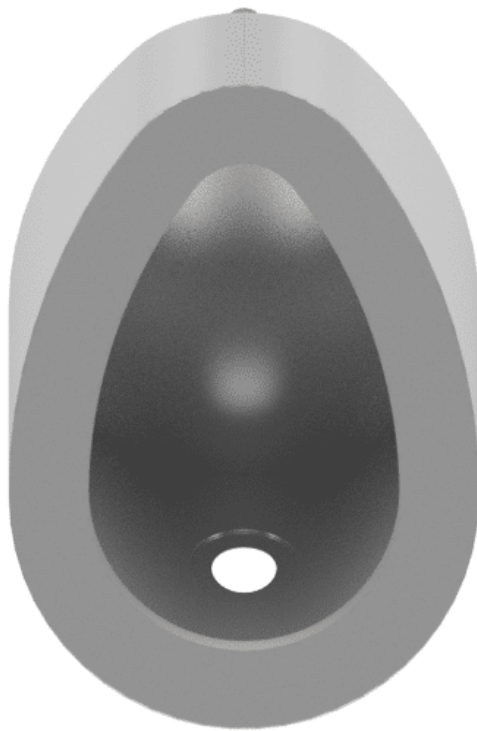

PRODUCT IMAGE



PRODUCT IMAGE

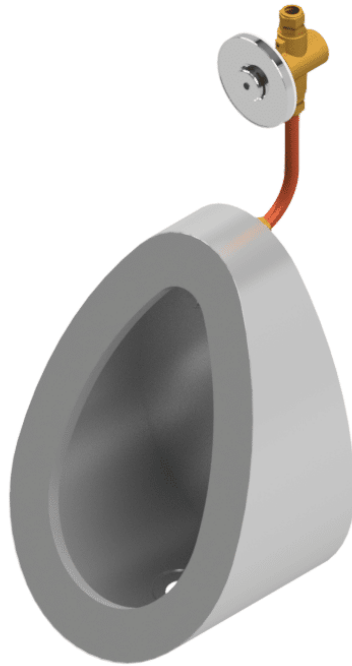

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.