
PRODUCT RANGE SPECIFICATION

# B17744 – Bowl Urinals



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

| DOCUMENT SCOPE | DOCUMENT REFERENCE | GENERATED ON |
|---|---|---|
| Product range | B17744{PSS} | 14 Nov 2026 |

**Detailed item specifications**

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b17744-bowl-urinals#specifications

## 01 Product description and specification

**Product description**

Wall-mounted Grade 304 stainless steel bowl urinal for public and commercial washrooms, with integral brackets, a polished inner bowl, satin exterior, brass flush coupling and 40 mm waste opening. Choose B17744(B) back entry for concealed pipework or B17744(T) top entry for an exposed connection. Flush controls are optional: specify B17744(155UW) for back entry, or one Walcro 103LUR valve with one UR15TP offset pipe for top entry. The bowl and flushing accessories are priced separately.

**Short Form Specification**

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B17744 wall-mounted bowl urinal in Grade 304 stainless steel; integral mounting brackets; one-piece bowl with polished interior and satin exterior; brass flush coupling and flush spreader; 40 mm waste opening. Select B17744(B) back entry or B17744(T) top entry. Optional flush systems are specified separately.

## 02 Configuration options

| | |
|---|---|
| **Flushing Inlet Orientation** | Back Entry; Top Entry |

Options vary by model; not every combination is available. Use the product page to select a model.

## 03 Functional features

01 **Grade 304 stainless steel**
Stainless steel bowl for daily public and commercial washroom use.

02 **Wall-mounted installation**
Integral mounting brackets support wall installation.

03 **Smooth bowl surfaces**
One-piece bowl with polished interior and satin exterior.

04 **Two inlet arrangements**
Choose back entry for concealed pipework or top entry for an exposed connection.

**05 Flush coupling and spreader**
Brass coupling and flush spreader form part of the bowl arrangement.

**06 40 mm waste opening**
Base aperture for the specified waste fitting and trap arrangement.

**07 Model-specific optional flushing**
Back entry: B17744(155UW). Top entry: one 103LUR valve together with one UR15TP offset pipe.

## 04 Application information

| | |
|---|---|
| **Intended applications** | Public Restrooms |
| **Industries** | Colleges & Universities, Government & Public Sector, Hotels & Lodges, Restaurants & Cafés, Schools |

## 05 Supply and support

| | |
|---|---|
| **Typical lead time** | 10–15 working days |
| **Warranty** | 12 months |

## 06 Frequently asked questions

**What is the difference between the two models?**
B17744(B) has back entry for concealed pipework. B17744(T) has top entry for an exposed flush connection. Both are wall-mounted Grade 304 stainless steel bowl urinals.

**Which flush system is recommended for the back-entry model?**
Specify the optional B17744(155UW) concealed back-entry 15 mm flush system with B17744(B). It is ordered and priced separately from the bowl.

**Which accessories are recommended for the top-entry model?**
Specify one 04VF_WAL-103LUR Walcro 103LUR exposed lever-operated valve and one 04VFP-UR15TP offset flush pipe per B17744(T) bowl. If selecting the valve, include the offset pipe as well.

**Are the valve and flush pipe included in the bowl price?**
No. The published bowl price covers the selected B17744 urinal. The concealed flush system, exposed valve and offset flush pipe are optional items with separate prices.


**What material and finish does the bowl have?**
The bowl is manufactured from Grade 304 stainless steel with a smooth polished internal surface and satin exterior.

**How is the bowl mounted?**
It is wall mounted using integral mounting brackets. Check wall support and plumbing positions for the selected entry model before installation.

**What waste connection is provided?**
The bowl has a 40 mm waste opening at its base. Specify the waste fitting, trap and connection arrangement to suit the installation.

**Where can this urinal be used?**
Typical uses include public and commercial restrooms, schools, universities and restaurant washrooms. Choose the inlet and flushing arrangement to suit the site.


## Product drawings and images

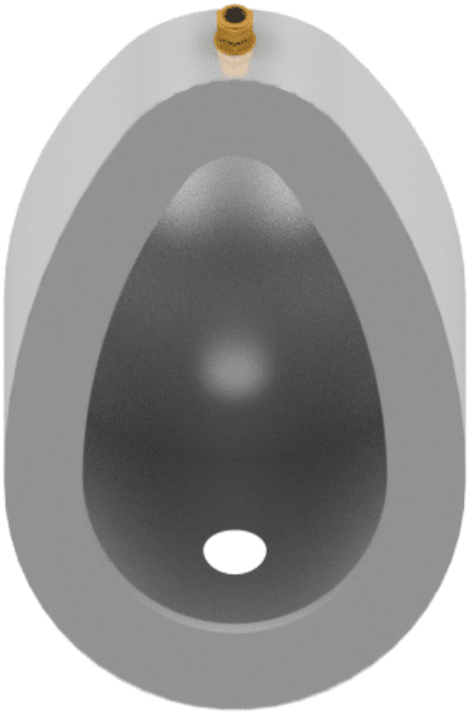


PRODUCT IMAGE



PRODUCT IMAGE

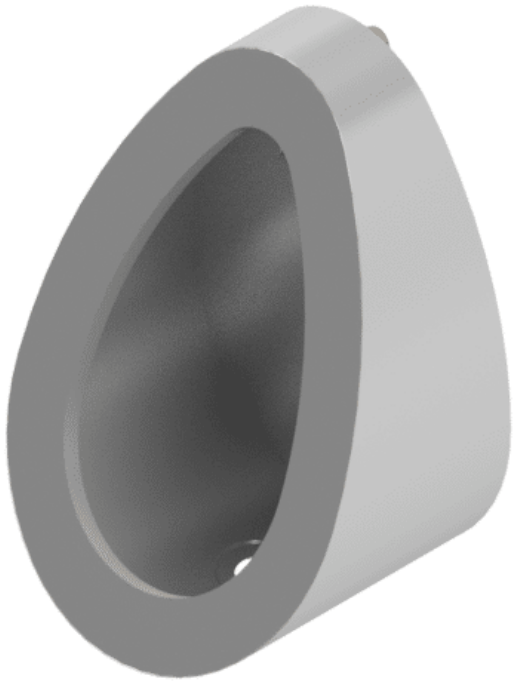


PRODUCT IMAGE

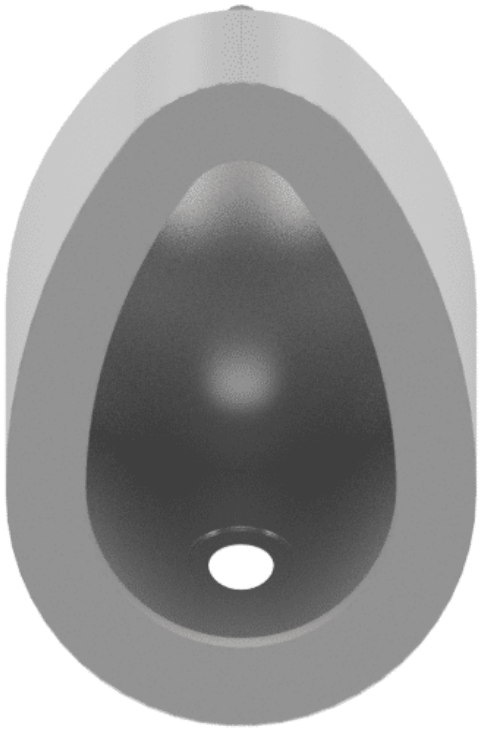

PRODUCT IMAGE



PRODUCT IMAGE

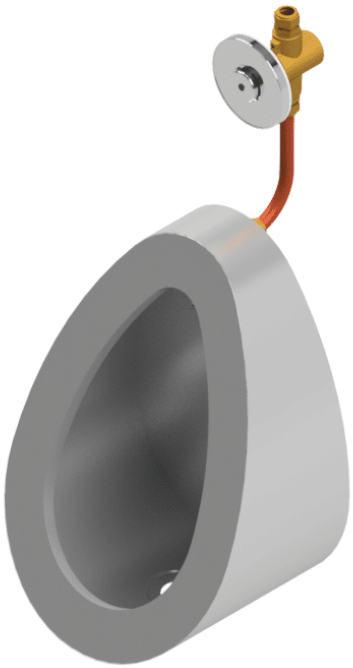

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.