

PRODUCT RANGE SPECIFICATION

B17744 – Bowl Urinals

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B17744{PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	-----------------------------------	---	-----------------------------

01 Product description and specification

Product description	Wall-mounted bowl urinal for individual use in public and commercial washrooms. Specify the required connection and flushing configuration. The polished satin exterior enhances aesthetics, while the smooth polished internal surface resists scale build-up and facilitates effortless cleaning. Designed for simple and secure wall mounting, the urinal includes integral mounting brackets for a hassle-free installation. It is available in two flushing configurations: • Top Entry – Compatible with exposed or concealed cisterns. • Back Entry – For a streamlined appearance with concealed pipework. Each unit comes with a brass coupling, allowing easy connection to a flush pipe or flush valve. A flush spreader optimizes water distribution for an efficient, water-saving flush. Additionally, a standard 40 mm waste outlet hole is provided at the base, allowing easy integration with PVC sewerage systems. For high-use environments, we also offer a range of stainless steel trough urinals. Construction and features • Durable Grade 304 stainless steel – Corrosion-resistant, hygienic, and easy to clean. • Wall-Mounted Design – Simple installation with integral mounting brackets. • Multiple Flush Entry Options – Available in top entry and back entry configurations. • Efficient Water Use – Integrated flush spreader ensures optimal water flow. • Standard Waste Outlet – Easy connection to PVC sewerage systems. • Robust & Long-Lasting – Built to withstand heavy use in commercial settings.
---------------------	---

Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B17744 wall-mounted bowl urinal, Grade 304 stainless steel with integral mounting brackets, brass coupling and 40 mm waste opening. Connection configuration as selected.
--------------------------	--

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B17744(B)	BOWL URINAL BACK-ENTRY	Flushing Inlet Orientation: Back Entry
B17744(T)	Bowl Urinal Stainless Steel Aisi 304 Top-Entry	Flushing Inlet Orientation: Top Entry

03 Application information

Intended applications	Public Restrooms
-----------------------	------------------

03 Application information

Industries	Government & Public Sector
------------	----------------------------


04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months


Product drawings and images




PRODUCT IMAGE

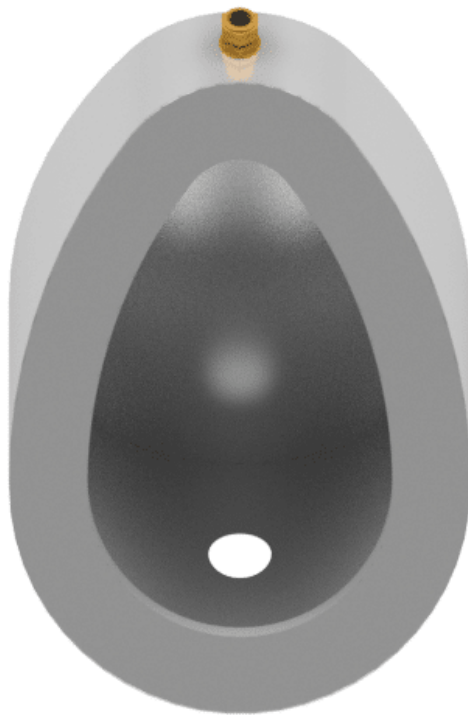


PRODUCT IMAGE

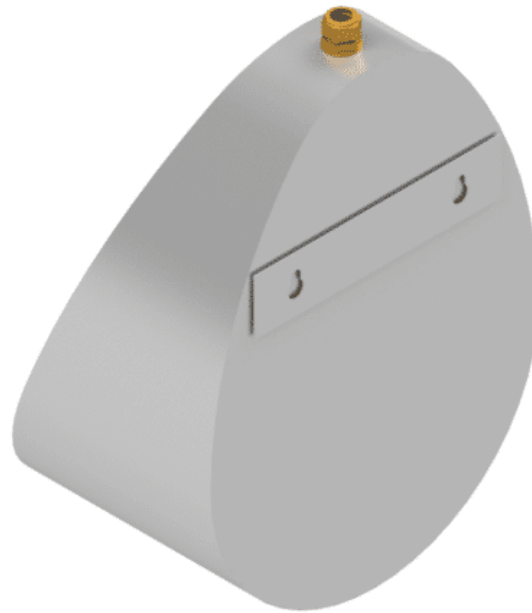

PRODUCT IMAGE

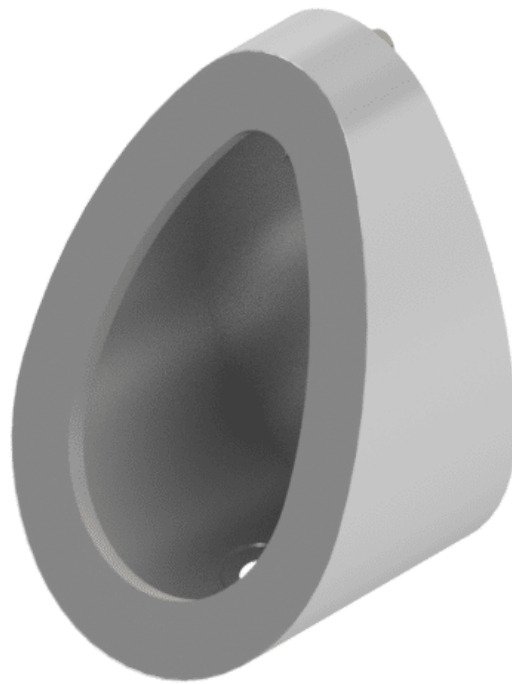


PRODUCT IMAGE

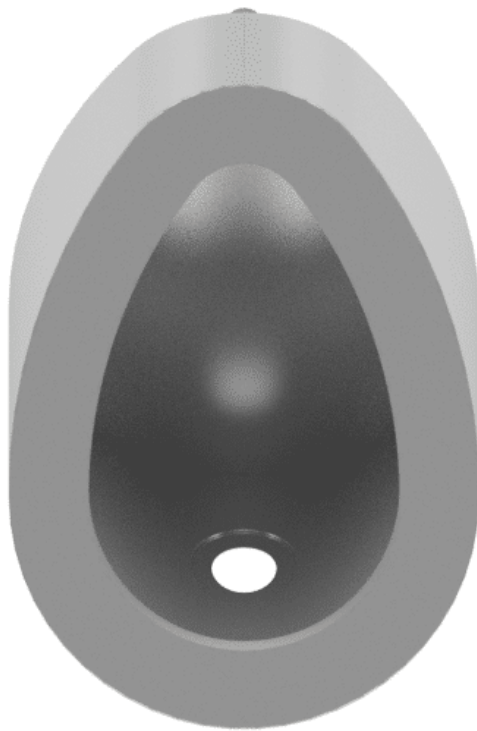

PRODUCT IMAGE



PRODUCT IMAGE

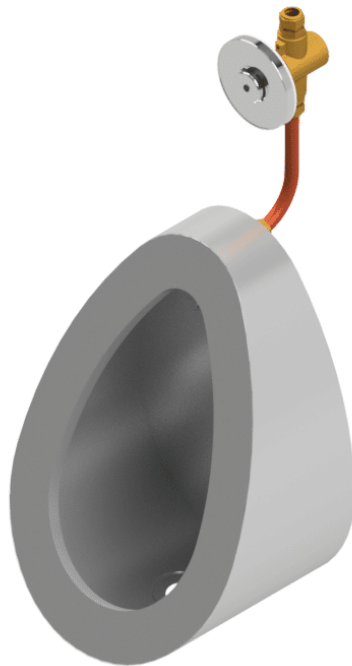

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.