MODEL SPECIFICATION

B17750(B) – Urinal Single Stall Back Entry Stainless Steel 304



PRODUCT IMAGE · B17750 single-stall urinal in Grade 304 stainless steel; back-entry model shown.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Model	B17750(B){PSS}	13 Nov 2026

01 Model specification

Urinal Single Stall, Stainless Steel Grade 304, 0.9mm Thick, 280mm (L) x 358mm (W) x 569mm (H), with Wall Mounting, Pre-Punched Mounting Holes, 1/2" Back Inlet and Bottom 1 1/2" Pre-Punched Waste Outlet Hole, Basterfield Model B17750(B). Flushing accessories are ordered separately.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Flushing Inlet Orientation	Back Entry	–	–
Material	Stainless Steel Grade 304	–	Urinal body manufactured from Grade 304 stainless steel.
Material Thickness	0.9	mm	Urinal body material thickness: 0.9mm.
Width	358	mm	Overall left-to-right body width: 358mm, including the mounting flanges.
Length	280	mm	Overall front-to-back body depth: 280mm.
Height	569	mm	Overall body height: 569mm.

03 Dimensions and mass

PARAMETER	VALUE	UNIT
Length	280	mm
Width	358	mm
Overall height	569	mm
Weight	7	kg

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

04 Model and supply data

Parent product	B17750 — Wall Hung Single Stall Urinal
Typical lead time	10–15 working days
Warranty	12 months

05 Specification notes

Configuration description

The Basterfield B17750(B) is the back-entry model in the B17750 single-stall urinal range. It has a 1/2" inlet at the back of the unit.

The Basterfield B17750 is a wall-mounted single-stall urinal for public, commercial and institutional washrooms, manufactured from Grade 304 stainless steel in 0.9mm thickness. Pre-punched mounting holes simplify fixing the unit to a suitable wall.

Both entry models have the same overall body dimensions: 358mm wide x 280mm deep x 569mm high. Choose the inlet position to suit the installation: B17750(T) has a 1/2" inlet at the top, and B17750(B) has a 1/2" inlet at the back. Both have a 1 1/2" pre-punched waste outlet hole at the bottom.

For B17750(T), the optional flushing arrangement uses one 04VF_WAL-103LUR Walcro 103LUR exposed lever-operated valve and one 04VFP-UR15TP offset flush pipe per urinal. Include the offset pipe when selecting the valve. For B17750(B), select the optional B17744(B-155UW) concealed push-button flushing assembly. Flushing accessories are ordered and priced separately from the urinal.

Select wall fixings to suit the wall construction and coordinate the water supply, inlet alignment, waste fitting and trap before installation. The waste outlet specification describes a pre-punched hole; the waste fitting and trap must be specified separately. Clean the stainless steel regularly using suitable non-abrasive cleaning products.

Selected model: B17750(B). Optional flushing: One B17744(B-155UW) Concealed Push-Button Flush Assembly.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this model.

Urinal Single Stall, Wall Mounted, Stainless Steel Grade 304, 0.9mm Thick, 358mm Wide x 280mm Deep x 569mm High, with Pre-Punched Mounting Holes, 1/2" Back Inlet and Bottom 1 1/2" Pre-Punched Waste Outlet Hole, Model B17750(B). Flushing Accessories Ordered Separately.

Detailed specification

- Model: B17750(B)
- Type: Single-Stall Urinal
- Installation: Wall Mounted
- Material: Stainless Steel Grade 304
- Material Thickness: 0.9mm
- Overall Width: 358mm
- Overall Depth: 280mm
- Overall Height: 569mm
- Mounting: Pre-Punched Fixing Holes
- Flush Inlet: 1/2", Back Entry
- Waste Outlet: Bottom 1 1/2" Pre-Punched Hole
- Optional Flushing: One B17744(B-155UW) Concealed Push-Button Flush Assembly
- Supply: Flushing Accessories, Waste Fitting and Trap Specified Separately

06 Frequently asked questions

What material and thickness are used?

Both models are manufactured from Grade 304 stainless steel in 0.9mm thickness.

Do the top-entry and back-entry models have the same dimensions?

Yes. Both models are 358mm wide x 280mm deep x 569mm high. The inlet position differs.

What is the difference between B17750(T) and B17750(B)?

B17750(T) has a 1/2" inlet at the top. B17750(B) has a 1/2" inlet at the back. Select the model to suit the plumbing layout.

How is the urinal mounted?

Pre-punched mounting holes simplify wall installation. Select appropriate fixings for the wall construction and support the unit securely.

What waste connection is provided?

Both models have a 1 1/2" pre-punched waste outlet hole at the bottom. This describes the hole; specify a compatible waste fitting and trap separately.


Which optional flushing accessories should I select?

For B17750(T), select one 04VF_WAL-103LUR Walcro 103LUR valve and one 04VFP-UR15TP offset flush pipe per urinal. For B17750(B), select one B17744(B-155UW) concealed push-button flushing assembly per urinal. Flushing accessories are supplied and priced separately.


How should I clean the stainless steel?

Clean regularly using suitable non-abrasive products, rinse and dry. Avoid abrasive pads and cleaning products that can damage stainless steel.


Product drawings and images

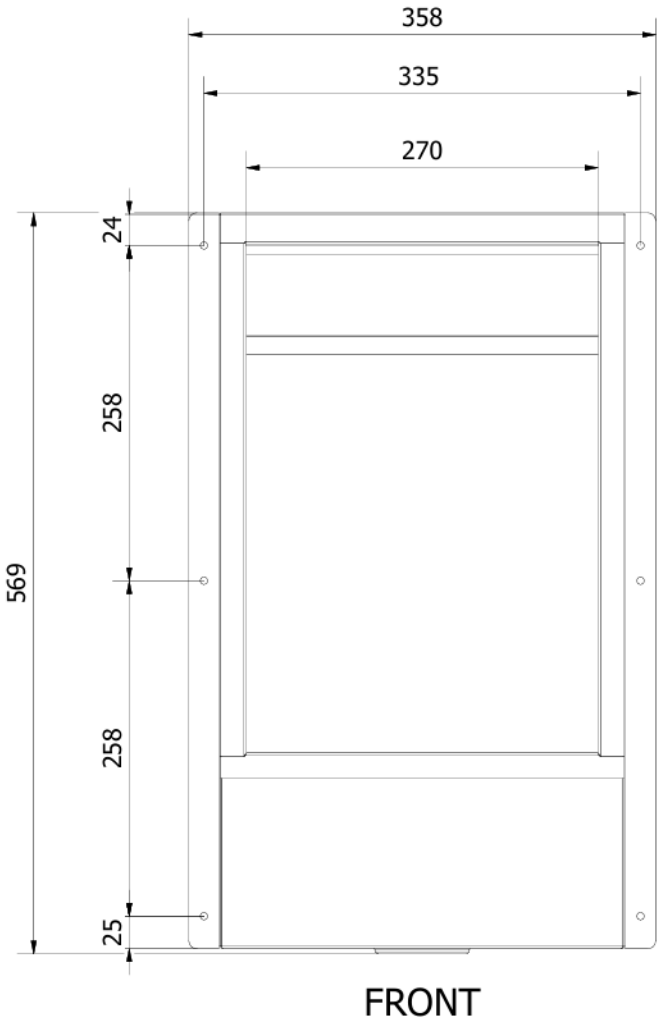

FRONT VIEW · B17750(B) front view.

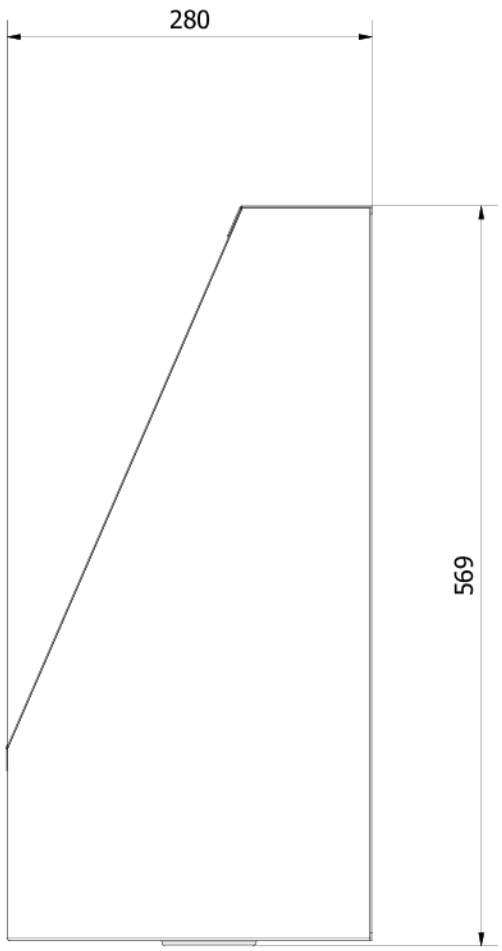

RIGHT VIEW · B17750(B) right view.

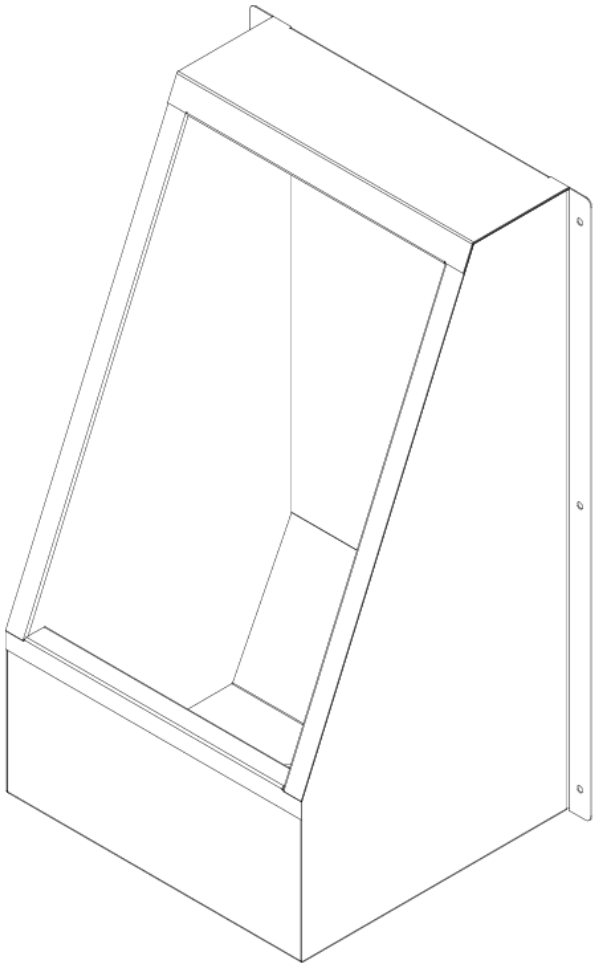

ISOMETRIC VIEW · B17750(B) isometric view.

E&OE. Specifications are subject to change without notice.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357