PRODUCT RANGE SPECIFICATION

B17750 – Wall Hung Single Stall Urinal



PRODUCT IMAGE · B17750 single-stall urinal in Grade 304 stainless steel; back-entry model shown.

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	**B17750{PSS}**	**13 Nov 2026**

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b17750-wall-hung-single-stall-urinal#specifications

01 Product description and specification

Product description

Wall-mounted single-stall urinal in 0.9mm Grade 304 stainless steel, with pre-punched mounting holes and bottom waste outlet hole. Choose top or back 1/2" inlet; both models measure 358mm wide x 280mm deep x 569mm high. Optional flushing accessories are supplied separately.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield B17750. Wall-Mounted Single-Stall Urinal, Stainless Steel Grade 304, 0.9mm Thick, 358mm Wide x 280mm Deep x 569mm High, Pre-Punched Mounting Holes and Bottom 1 1/2" Pre-Punched Waste Outlet Hole. Select B17750(T) with 1/2" Top Inlet or B17750(B) with 1/2" Back Inlet. Flushing Accessories Ordered Separately.

02 Configuration options

Entry Type	Back Entry; Top Entry

Options vary by model; not every combination is available. Use the product page to select a model.

03 Functional features

01 **Grade 304 Stainless Steel**
0.9mm stainless steel construction for public, commercial and institutional washrooms.

02 **Pre-Punched Mounting Holes**
Ready-made fixing holes simplify wall installation.

03 **Two Inlet Positions**
Choose a 1/2" inlet at the top or back to suit the plumbing layout.

04 **Common Body Dimensions**
Both models measure 358mm wide x 280mm deep x 569mm high.

05 Bottom Waste Outlet Hole

A 1 1/2" pre-punched hole is provided at the bottom for a separately specified waste fitting.

06 Optional Flushing Systems

Top entry uses the optional Walcro 103LUR valve and UR15TP offset pipe. Back entry uses the optional B17744(B-155UW) assembly.

04 Application information

Intended applications	Public Restrooms
Industries	Government & Public Sector

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Frequently asked questions

What material and thickness are used?

Both models are manufactured from Grade 304 stainless steel in 0.9mm thickness.

Do the top-entry and back-entry models have the same dimensions?

Yes. Both models are 358mm wide x 280mm deep x 569mm high. The inlet position differs.

What is the difference between B17750(T) and B17750(B)?

B17750(T) has a 1/2" inlet at the top. B17750(B) has a 1/2" inlet at the back. Select the model to suit the plumbing layout.

How is the urinal mounted?

Pre-punched mounting holes simplify wall installation. Select appropriate fixings for the wall construction and support the unit securely.

What waste connection is provided?

Both models have a 1 1/2" pre-punched waste outlet hole at the bottom. This describes the hole; specify a compatible waste fitting and trap separately.

Which optional flushing accessories should I select?


For B17750(T), select one 04VF_WAL-103LUR Walcro 103LUR valve and one 04VFP-UR15TP offset flush pipe per urinal. For B17750(B), select one B17744(B-155UW) concealed push-button flushing assembly per urinal. Flushing accessories are supplied and priced separately.

How should I clean the stainless steel?


Clean regularly using suitable non-abrasive products, rinse and dry. Avoid abrasive pads and cleaning products that can damage stainless steel.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357


Product drawings and images

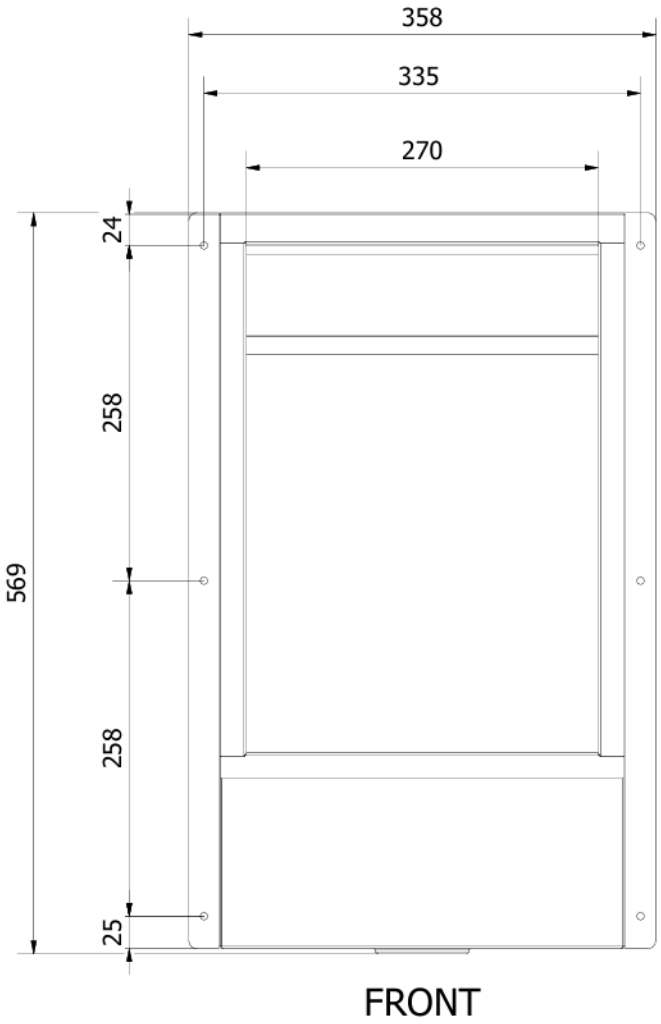

FRONT VIEW · B17750(B) front view; body dimensions also apply to B17750(T).

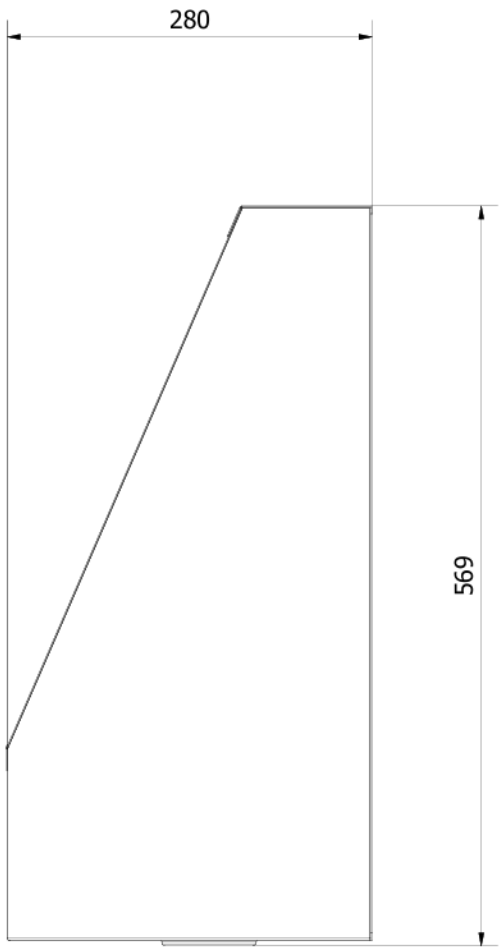

RIGHT VIEW · B17750(B) right view; body dimensions also apply to B17750(T).

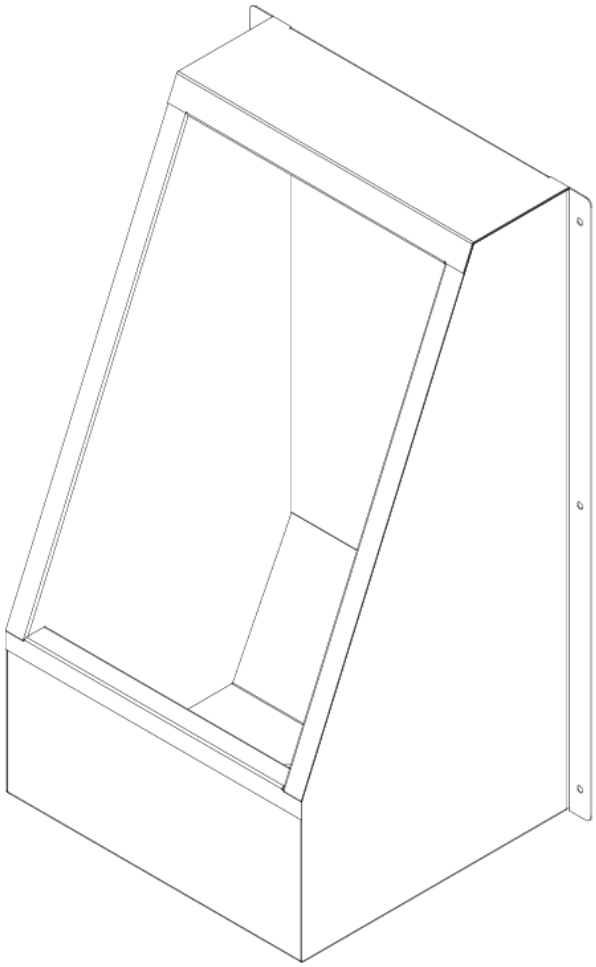

ISOMETRIC VIEW · B17750(B) isometric view; body dimensions also apply to B17750(T).

E&OE. Specifications are subject to change without notice.