

PRODUCT RANGE SPECIFICATION

B22320(FM) – Floor-Mounted Surgeon Scrub-Up Sink



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE
Product range

DOCUMENT REFERENCE
B22320(FM){PSS}

DATA STATUS
Published catalogue data

GENERATED ON
4 Oct 2026

01 Product description and specification

Product description

The Basterfield B22320(FM) is a floor-mounted surgeon scrub-up sink manufactured from Grade 304 stainless steel for clinical handwashing areas in healthcare facilities.

The trough has double-walled, pressed and welded construction, a polished satin finish and a rear splashback for routine cleaning and maintenance.

Floor-mounting brackets support the unit. A 250 x 250 mm access panel provides access to plumbing connections for servicing.

Choose from six standard lengths: 900, 1200, 1500, 1800, 2100 or 2400 mm. Each length is available in 1.2 mm or 1.5 mm material thickness, giving 12 published configurations.

The 900, 1200, 1500 and 1800 mm models have one 40 mm diameter drainage outlet. The 2100 and 2400 mm models have two 40 mm diameter drainage outlets.

The range can be specified with elbow-operated medical mixers or sensor-activated tapware. Confirm the required tapware and plumbing arrangement when requesting a quotation.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B22320(FM) floor-mounted surgeon scrub-up sink in Grade 304 stainless steel with a polished satin finish, double-walled, pressed and welded construction, and rear splashback. Length: 900, 1200, 1500, 1800, 2100 or 2400 mm. Material thickness: 1.2 or 1.5 mm. Floor-mounting brackets and 250 x 250 mm plumbing access panel. Drainage: one 40 mm diameter outlet on 900–1800 mm models; two 40 mm diameter outlets on 2100 and 2400 mm models. Tapware and plumbing arrangement to be confirmed in the quotation.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	—	The primary material used in the construction of the item. Certain components may be manufactured from different materials.

03 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B22320(FM-112-0900)	Floor-Mounted Surgeon Scrub-Up Sink, 900 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 900 mm Material Thickness: 1.2 mm
B22320(FM-112-1200)	Floor-Mounted Surgeon Scrub-Up Sink, 1200 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 1200 mm Material Thickness: 1.2 mm
B22320(FM-112-1500)	Floor-Mounted Surgeon Scrub-Up Sink, 1500 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 1500 mm Material Thickness: 1.2 mm
B22320(FM-112-1800)	Floor-Mounted Surgeon Scrub-Up Sink, 1800 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 1800 mm Material Thickness: 1.2 mm
B22320(FM-112-2100)	Floor-Mounted Surgeon Scrub-Up Sink, 2100 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 2100 mm Material Thickness: 1.2 mm
B22320(FM-112-2400)	Floor-Mounted Surgeon Scrub-Up Sink, 2400 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 2400 mm Material Thickness: 1.2 mm
B22320(FM-115-0900)	Floor-Mounted Surgeon Scrub-Up Sink, 900 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 900 mm Material Thickness: 1.5 mm
B22320(FM-115-1200)	Floor-Mounted Surgeon Scrub-Up Sink, 1200 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 1200 mm Material Thickness: 1.5 mm
B22320(FM-115-1500)	Floor-Mounted Surgeon Scrub-Up Sink, 1500 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 1500 mm Material Thickness: 1.5 mm
B22320(FM-115-1800)	Floor-Mounted Surgeon Scrub-Up Sink, 1800 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 1800 mm Material Thickness: 1.5 mm
B22320(FM-115-2100)	Floor-Mounted Surgeon Scrub-Up Sink, 2100 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 2100 mm Material Thickness: 1.5 mm
B22320(FM-115-2400)	Floor-Mounted Surgeon Scrub-Up Sink, 2400 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 2400 mm Material Thickness: 1.5 mm

04 Functional features

01 Grade 304 stainless steel

Grade 304 stainless steel with a polished satin finish provides a surface suited to routine cleaning and maintenance.

02 250 x 250 mm access panel

The access panel provides access to plumbing connections for maintenance and servicing.

03 Double-walled construction

The pressed and welded, double-walled trough provides rigidity for daily use in clinical handwashing areas.

04 Floor-mounted support

Floor-mounting brackets support the unit for a stable installation.

05 Six lengths, two thicknesses

Choose 900, 1200, 1500, 1800, 2100 or 2400 mm length, each available in 1.2 or 1.5 mm material thickness.

06 Drainage matched to length
Models from 900 to 1800 mm have one 40 mm diameter drainage outlet. The 2100 and 2400 mm models have two 40 mm diameter outlets.

05 Application information

Intended applications	Handwashing, Hospital Sinks
Industries	Hospitals & Clinics, Pharmaceutical Manufacturing


06 Supply and support

Typical lead time	10–15 working days
Warranty	24 months


Product drawings and images



PRODUCT IMAGE

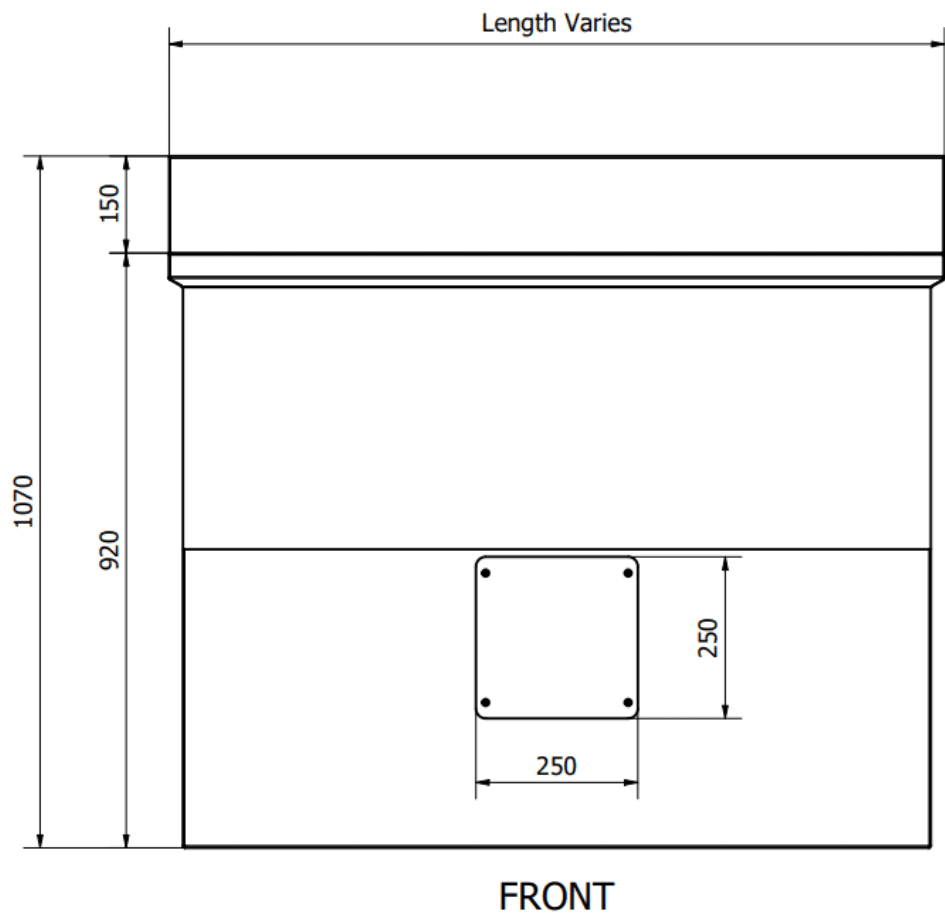


PRODUCT IMAGE

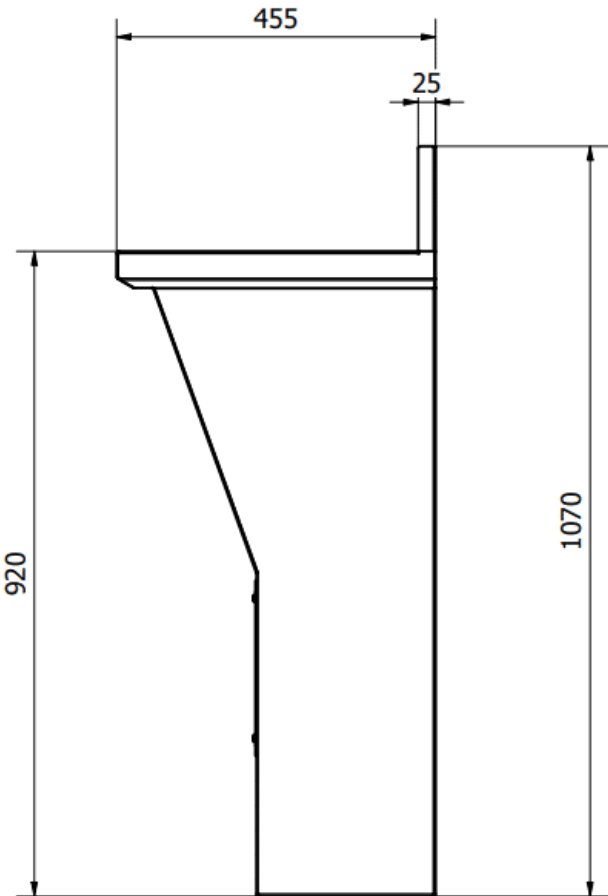


RIGHT

PRODUCT IMAGE

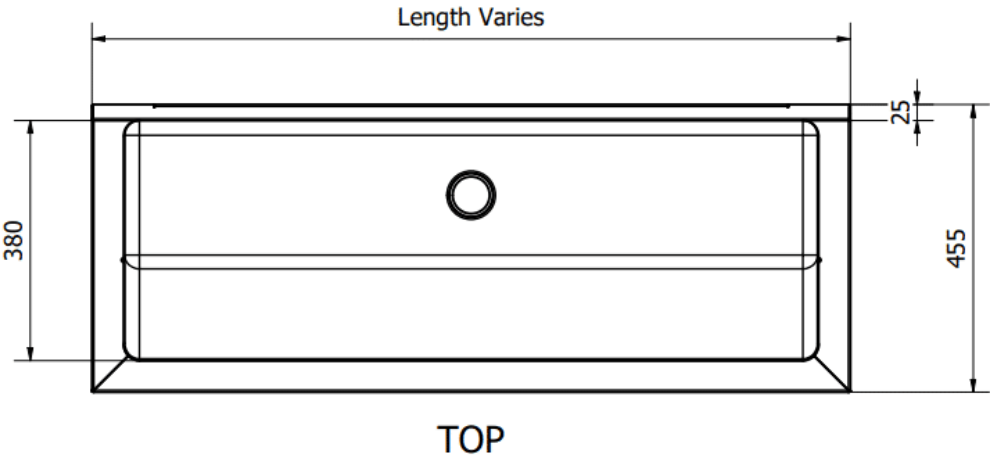


PRODUCT IMAGE

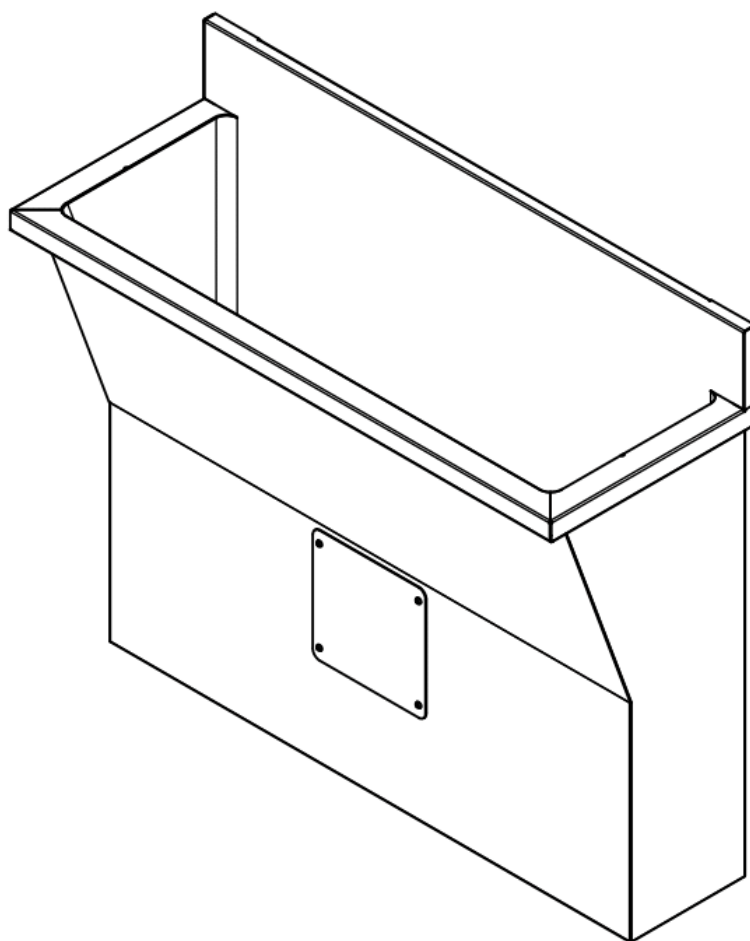

TOP RIGHT

PRODUCT IMAGE

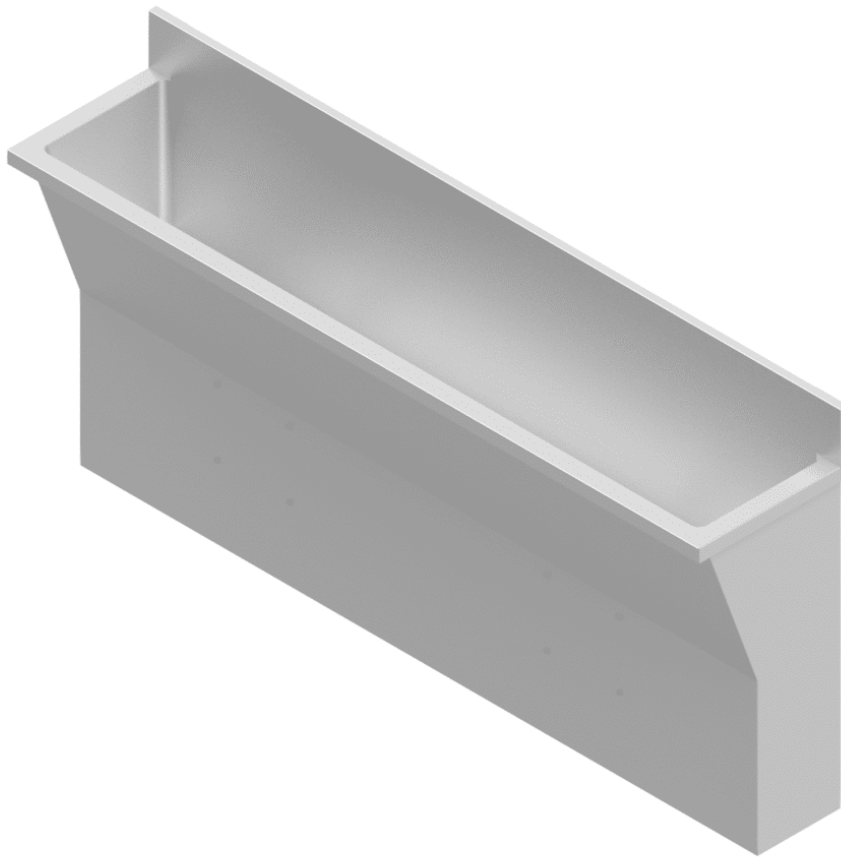

PRODUCT IMAGE



PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.