PRODUCT RANGE SPECIFICATION

B22320(FM) – Floor-Mounted Surgeon Scrub-Up Sink



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B22320(FM){PSS}	14 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b22320fm-floor-mounted-surgeon-scrub-up-sink#specifications

01 Product description and specification

Product description

Floor-mounted Grade 304 stainless steel surgeon scrub-up sink with a polished satin finish and double-walled construction. Available in six lengths from 900 to 2400 mm and material thicknesses of 1.2 or 1.5 mm.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield B22320(FM) floor-mounted surgeon scrub-up sink in Grade 304 stainless steel with a polished satin finish, double-walled, pressed and welded construction, and rear splashback. Length: 900, 1200, 1500, 1800, 2100 or 2400 mm. Material thickness: 1.2 or 1.5 mm. Floor-mounting brackets and 250 x 250 mm plumbing access panel. Drainage: one 40 mm diameter outlet on 900–1800 mm models; two 40 mm diameter outlets on 2100 and 2400 mm models. Tapware and plumbing arrangement to be confirmed in the quotation.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.

03 Configuration options

Length	900 mm; 1200 mm; 1500 mm; 1800 mm; 2100 mm; 2400 mm
Material Thickness	1.2 mm; 1.5 mm

Options vary by model; not every combination is available. Use the product page to select a model.

04 Functional features

01 Grade 304 stainless steel

Grade 304 stainless steel with a polished satin finish provides a surface suited to routine cleaning and maintenance.

02 250 x 250 mm access panel

The access panel provides access to plumbing connections for maintenance and servicing.

03 Double-walled construction

The pressed and welded, double-walled trough provides rigidity for daily use in clinical handwashing areas.

04 Floor-mounted support

Floor-mounting brackets support the unit for a stable installation.

05 Six lengths, two thicknesses

Choose 900, 1200, 1500, 1800, 2100 or 2400 mm length, each available in 1.2 or 1.5 mm material thickness.

06 Drainage matched to length

Models from 900 to 1800 mm have one 40 mm diameter drainage outlet. The 2100 and 2400 mm models have two 40 mm diameter outlets.

05 Application information

Intended applications	Handwashing, Hospital Sinks
Industries	Hospitals & Clinics, Pharmaceutical Manufacturing

06 Supply and support

Typical lead time	10–15 working days
Warranty	24 months

07 Frequently asked questions

What lengths are available?

The B22320(FM) range has six standard lengths: 900, 1200, 1500, 1800, 2100 and 2400 mm. Each length is available in both 1.2 mm and 1.5 mm material thickness, giving 12 published configurations.

What material and finish does the sink use?

The sink is manufactured from Grade 304 stainless steel with a polished satin finish. The trough has double-walled, pressed and welded construction, with a choice of 1.2 mm or 1.5 mm material thickness.

How can the plumbing connections be accessed?

A 250 x 250 mm access panel provides access to plumbing connections for maintenance and servicing.

How many drainage outlets does each model have?

The 900, 1200, 1500 and 1800 mm models have one 40 mm diameter drainage outlet. The 2100 and 2400 mm models have two 40 mm diameter outlets. The outlet arrangement is the same for both material thickness options.

How is the sink mounted?

The B22320(FM) is a floor-mounted unit supported by floor-mounting brackets. It also has a rear splashback.


What tapware can be specified?

The range can be specified with elbow-operated medical mixers or sensor-activated tapware. Confirm the tapware type and what is included in the supply when requesting a quotation.


Product drawings and images




PRODUCT IMAGE

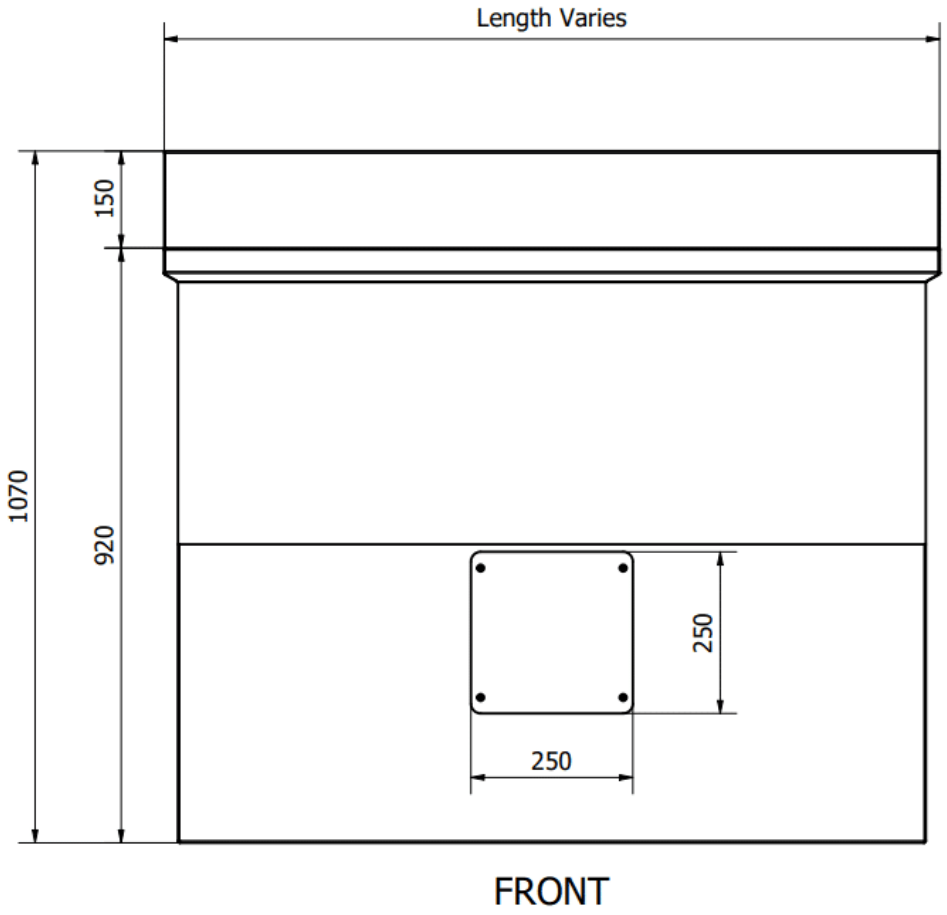


PRODUCT IMAGE

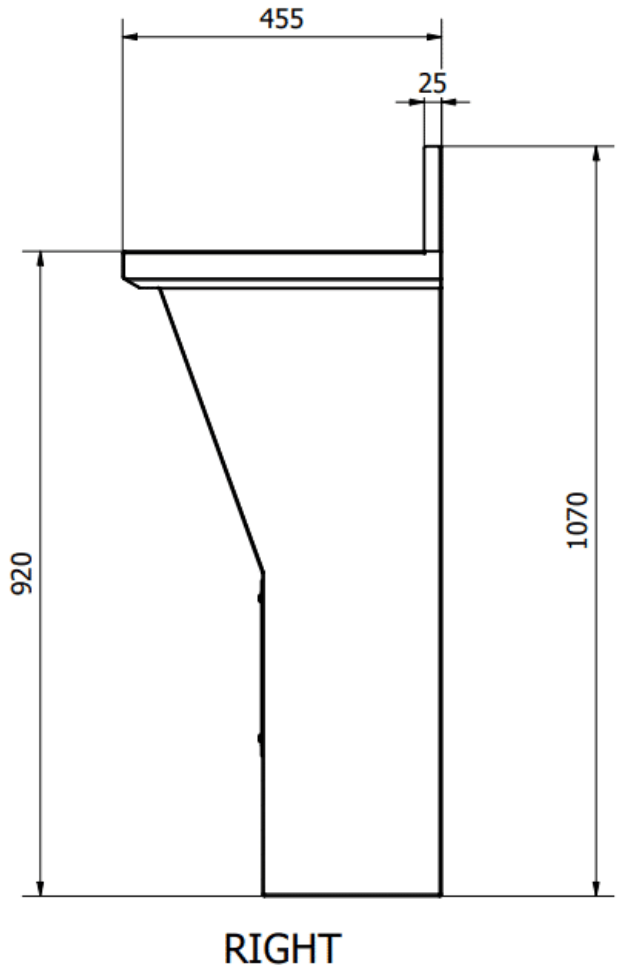

PRODUCT IMAGE

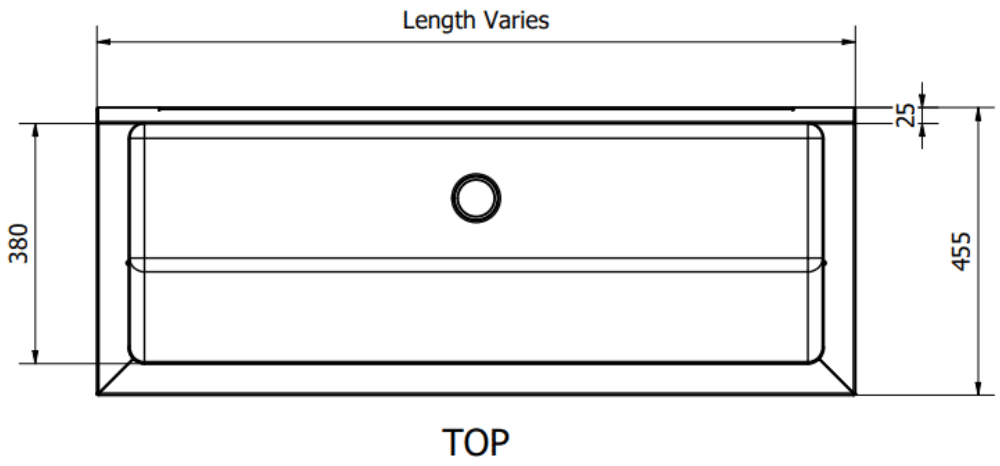


PRODUCT IMAGE

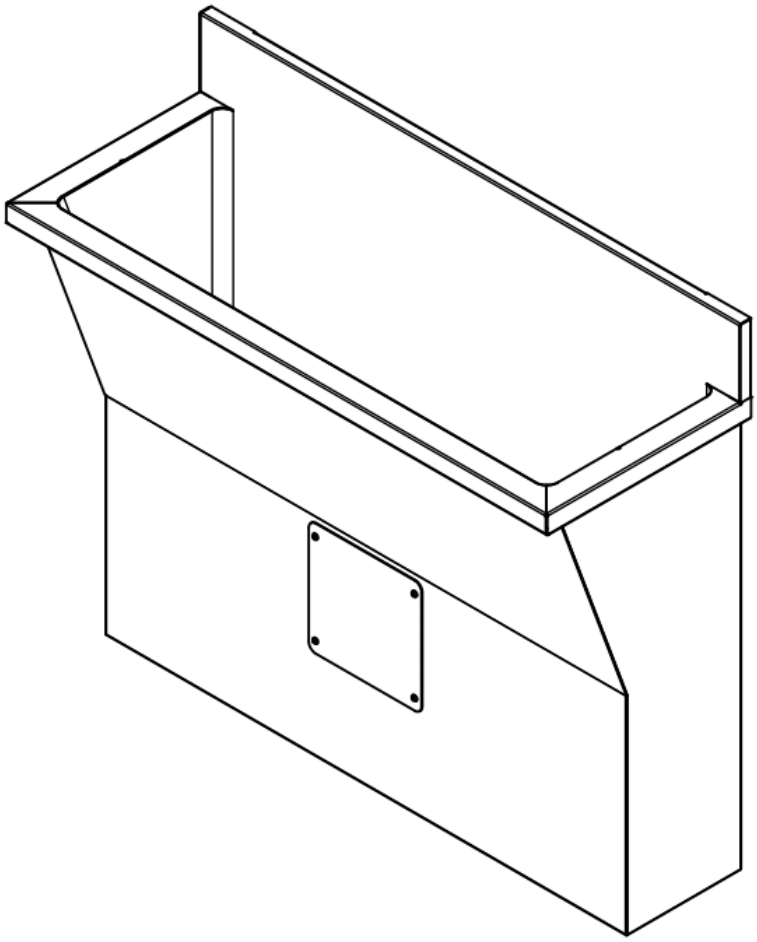

TOP RIGHT

PRODUCT IMAGE

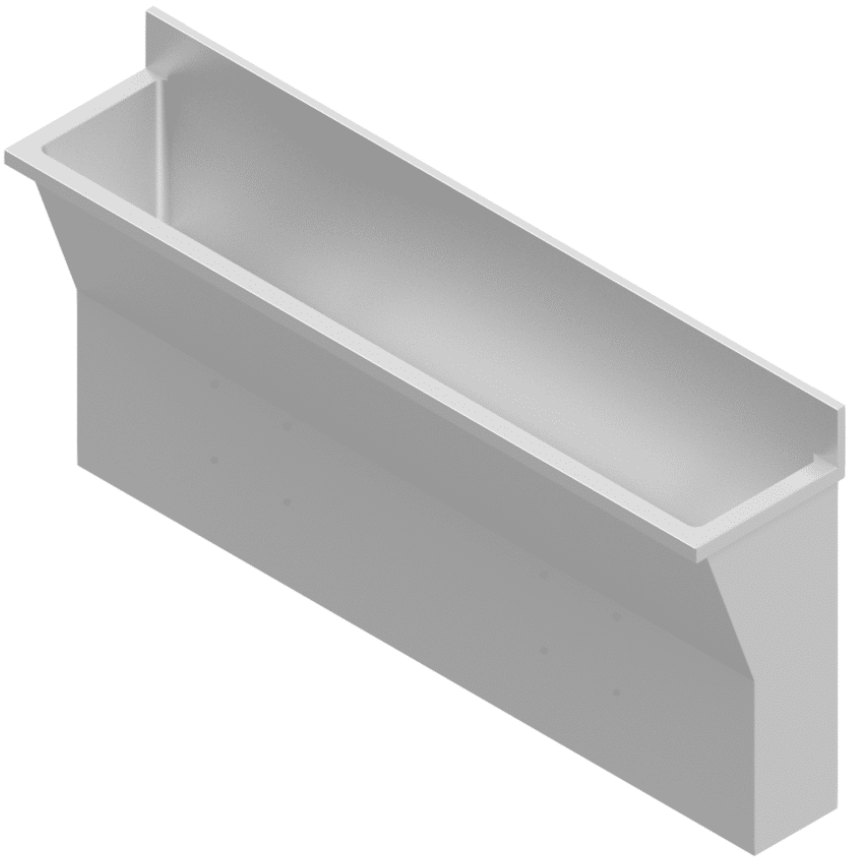

PRODUCT IMAGE



PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.