

PRODUCT RANGE SPECIFICATION

B22320(FM) – Floor-Mounted Surgeon Scrub-Up Sink

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B22320(FM){PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	---------------------------------------	---	-----------------------------

01 Product description and specification

Product description	Floor-mounted surgeon scrub-up sink for clinical handwashing. Specify the basin arrangement and tap configuration for the required scrub stations. The B22320(FM) Floor Mounted Surgeon’s Scrub-Up Trough represents the pinnacle of hygienic design for healthcare environments, manufactured from Grade 304 stainless steel in either 1.2 mm or 1.5 mm thickness configurations. A strategically positioned 250 mm x 250 mm access panel ensures convenient maintenance whilst maintaining the unit’s structural integrity. Available in six customisable lengths (900 mm, 1200 mm, 1500 mm, 1800 mm, 2100 mm, and 2400 mm), this floor-mounted unit accommodates multiple users simultaneously whilst maintaining optimal hygiene standards. The double-walled construction enhances structural integrity and provides superior insulation properties. The trough’s polished satin finish facilitates effortless cleaning and sanitisation, whilst the pressed and welded manufacturing process ensures long-term reliability under heavy institutional use. Units up to 1800 mm feature a single 40 mm drainage outlet, whilst longer models (2100 mm and 2400 mm) incorporate dual 40 mm outlets for enhanced drainage capacity, ensuring efficient water flow and preventing stagnation. The 250 mm x 250 mm access panel provides easy servicing of plumbing connections. The B22320(FM) integrates seamlessly with hands-free activation systems, including elbow-operated medical mixers and sensor-activated tapware, ensuring touch-free operation critical for infection control protocols. Floor-mounting brackets provide stable installation whilst allowing for thorough cleaning beneath the unit.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B22320(FM) floor-mounted surgeon scrub-up trough, Grade 304 stainless steel, 1.2 mm or 1.5 mm thickness as selected, with double-walled construction and rear splashback. Length, station count, tapware and drainage arrangement as selected from the published configurations.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B22320(FM-112-0900)	SURGEON SCRUB-UP SINK FLOOR UNIT S/S 304 900MM L	Length: 900 mm Material Thickness: 1.2 mm
B22320(FM-112-1200)	SURGEONS SCRUB-UP SINK FM 1200 x 1.2MM	Length: 1200 mm Material Thickness: 1.2 mm
B22320(FM-112-1500)	SURGEONS SCRUB-UP SINK FM 1500 x 1.2MM	Length: 1500 mm Material Thickness: 1.2 mm
B22320(FM-112-1800)	Surgeons Scrub-up Sink Fm 1800 X 1.2mm	Length: 1800 mm Material Thickness: 1.2 mm

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B22320(FM-112-2100)	SURGEONS SCRUB-UP SINK FM 2100 x 1.2MM	Length: 2100 mm Material Thickness: 1.2 mm
B22320(FM-112-2400)	SURGEONS SCRUB-UP SINK FM 2400 x 1.2MM	Length: 2400 mm Material Thickness: 1.2 mm
B22320(FM-115-0900)	B22320(FM-115-0900) Floor Mounted Surgeon's Scrub-Up Trough Stainless Steel 1.5mm Thickness 900mm (L) Length: 900. Material Thickness: 1.5.	Length: 900 mm Material Thickness: 1.5 mm
B22320(FM-115-1200)	SURGEONS SCRUB-UP SINK FM 1200 x 1.5MM	Length: 1200 mm Material Thickness: 1.5 mm
B22320(FM-115-1500)	SURGEONS SCRUB-UP SINK FM 1500 x 1.5MM	Length: 1500 mm Material Thickness: 1.5 mm
B22320(FM-115-1800)	SURGEONS SCRUB-UP SINK FM 1800 x 1.5MM	Length: 1800 mm Material Thickness: 1.5 mm
B22320(FM-115-2100)	SURGEONS SCRUB-UP SINK FM 2100 x 1.5MM	Length: 2100 mm Material Thickness: 1.5 mm
B22320(FM-115-2400)	SURGEONS SCRUB-UP SINK FM 2400 x 1.5MM	Length: 2400 mm Material Thickness: 1.5 mm

03 Application information


Intended applications	Hygiene Handwashing Stations
Industries	Hospitals & Clinics, Pharmaceutical Manufacturing

04 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

**PRODUCT IMAGE**

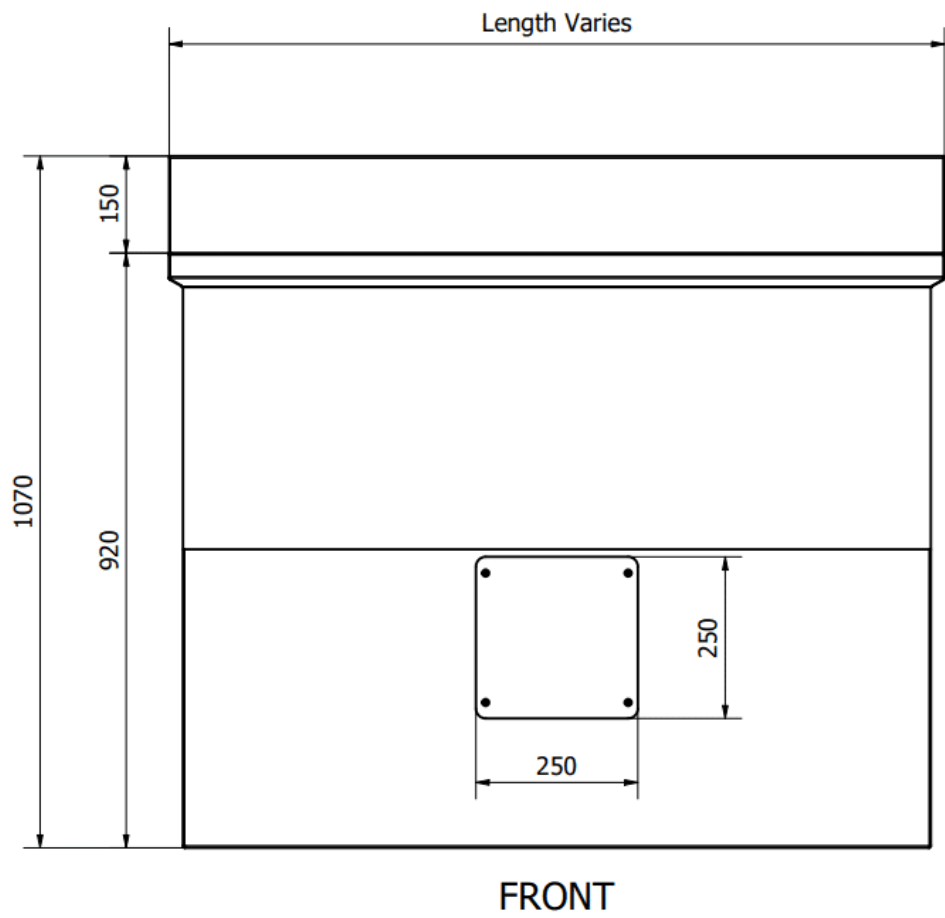


PRODUCT IMAGE

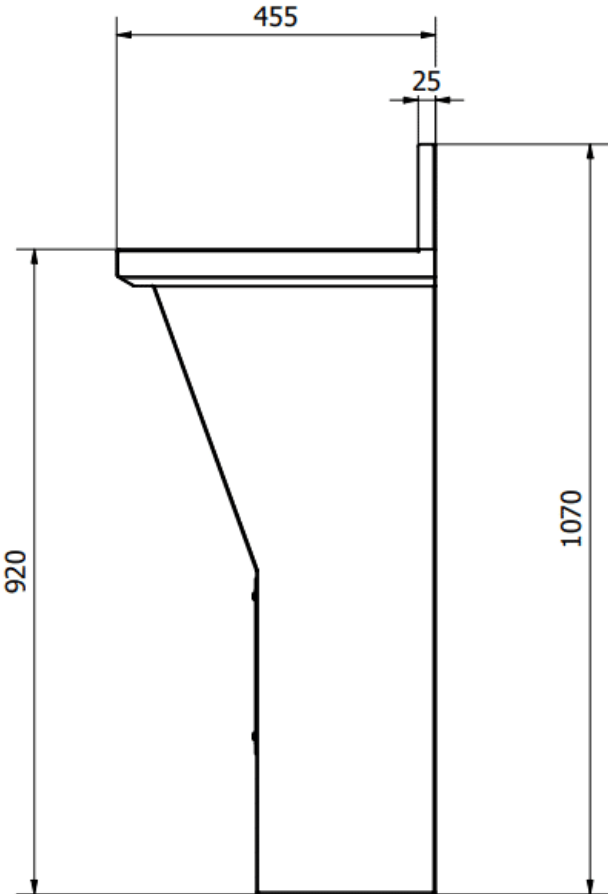


RIGHT

PRODUCT IMAGE

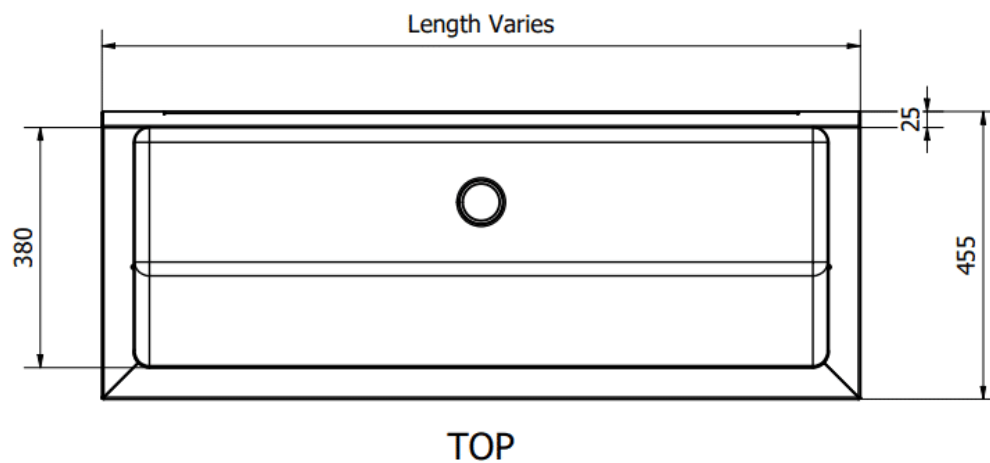


PRODUCT IMAGE

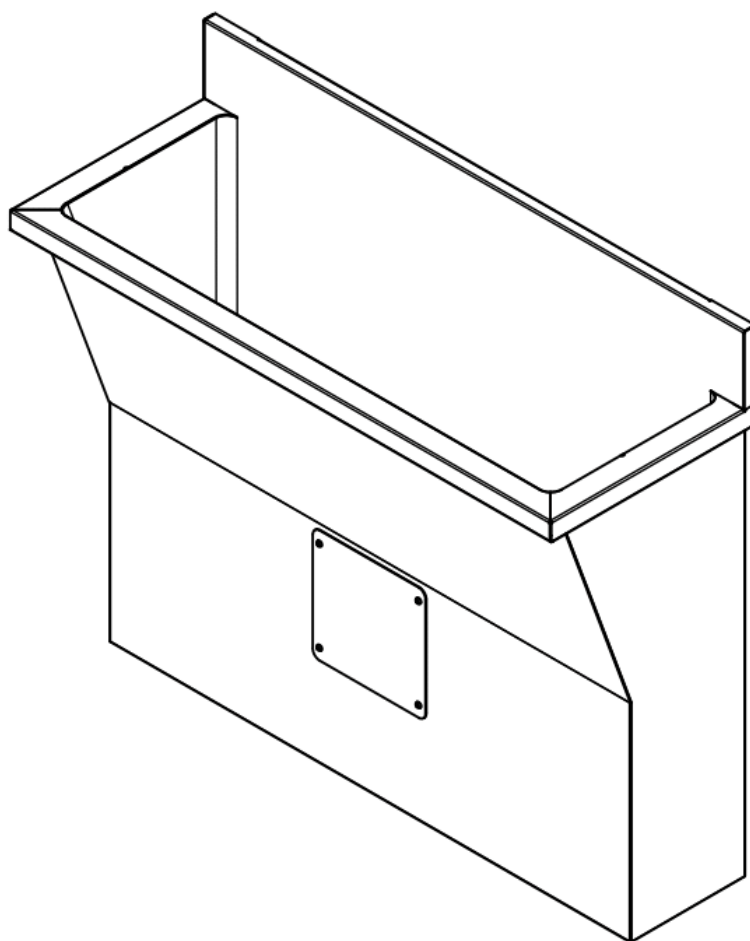

TOP RIGHT

PRODUCT IMAGE

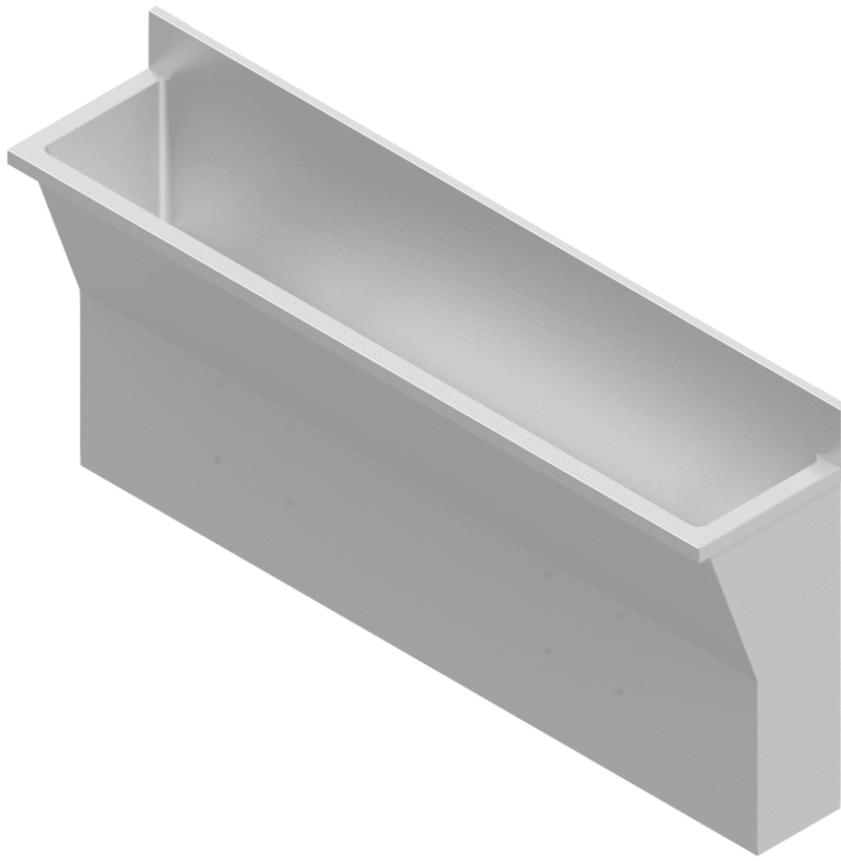

PRODUCT IMAGE



PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.