

PRODUCT RANGE SPECIFICATION

B22320(WM) – Wall-Mounted Surgeon Scrub-Up Sink



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B22320(WM){PSS}	DATA STATUS Published catalogue data	GENERATED ON 4 Oct 2026
---------------------------------	---------------------------------------	---	----------------------------

01 Product description and specification

Product description	The Basterfield B22320(WM) is a wall-mounted surgeon scrub-up sink manufactured from Grade 304 stainless steel for clinical handwashing areas in healthcare facilities. The trough has double-walled, pressed and welded construction, a polished satin finish and a rear splashback for routine cleaning and maintenance. Bracket-supported wall mounting keeps the floor beneath the trough clear for cleaning. All standard models are 455 mm wide, with a trough height of 620 mm excluding the integral 150 mm splashback. Choose from six standard lengths: 900, 1200, 1500, 1800, 2100 or 2400 mm. Each length is available in 1.2 mm or 1.5 mm material thickness, giving 12 published configurations. The 900, 1200, 1500 and 1800 mm models have one 40 mm diameter drainage outlet. The 2100 and 2400 mm models have two 40 mm diameter drainage outlets. Confirm the required tapware and plumbing arrangement when requesting a quotation. Manufactured in South Africa.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B22320(WM) wall-mounted surgeon scrub-up sink in Grade 304 stainless steel with a polished satin finish and double-walled, pressed and welded construction. Length: 900, 1200, 1500, 1800, 2100 or 2400 mm. Material thickness: 1.2 or 1.5 mm. Overall width: 455 mm. Trough height: 620 mm excluding the integral 150 mm splashback. Bracket-supported wall mounting. Drainage: one 40 mm diameter outlet on 900–1800 mm models; two 40 mm diameter outlets on 2100 and 2400 mm models. Manufactured in South Africa.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	—	The primary material used in the construction of the item. Certain components may be manufactured from different materials.

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B22320(WM-112-0900)	Wall-Mounted Surgeon Scrub-Up Sink, 900 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 900 mm Material Thickness: 1.2 mm
B22320(WM-112-1200)	Wall-Mounted Surgeon Scrub-Up Sink, 1200 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 1200 mm Material Thickness: 1.2 mm
B22320(WM-112-1500)	Wall-Mounted Surgeon Scrub-Up Sink, 1500 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 1500 mm Material Thickness: 1.2 mm
B22320(WM-112-1800)	Wall-Mounted Surgeon Scrub-Up Sink, 1800 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 1800 mm Material Thickness: 1.2 mm
B22320(WM-112-2100)	Wall-Mounted Surgeon Scrub-Up Sink, 2100 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 2100 mm Material Thickness: 1.2 mm
B22320(WM-112-2400)	Wall-Mounted Surgeon Scrub-Up Sink, 2400 mm Long, 1.2 mm Thick Grade 304 Stainless Steel.	Length: 2400 mm Material Thickness: 1.2 mm
B22320(WM-115-0900)	Wall-Mounted Surgeon Scrub-Up Sink, 900 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 900 mm Material Thickness: 1.5 mm
B22320(WM-115-1200)	Wall-Mounted Surgeon Scrub-Up Sink, 1200 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 1200 mm Material Thickness: 1.5 mm
B22320(WM-115-1500)	Wall-Mounted Surgeon Scrub-Up Sink, 1500 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 1500 mm Material Thickness: 1.5 mm
B22320(WM-115-1800)	Wall-Mounted Surgeon Scrub-Up Sink, 1800 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 1800 mm Material Thickness: 1.5 mm
B22320(WM-115-2100)	Wall-Mounted Surgeon Scrub-Up Sink, 2100 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 2100 mm Material Thickness: 1.5 mm
B22320(WM-115-2400)	Wall-Mounted Surgeon Scrub-Up Sink, 2400 mm Long, 1.5 mm Thick Grade 304 Stainless Steel.	Length: 2400 mm Material Thickness: 1.5 mm

04 Functional features

- 01 Clear floor access

Bracket-supported wall mounting keeps the floor beneath the trough clear for cleaning.
- 02 Grade 304 stainless steel

Grade 304 stainless steel with a polished satin finish provides a durable surface for routine cleaning and maintenance.
- 03 Double-walled construction

The pressed and welded, double-walled trough provides rigidity for daily use in clinical handwashing areas.
- 04 Integral 150 mm splashback

The rear splashback helps protect the wall from water splashes during use.
- 05 Six lengths, two thicknesses

Choose 900, 1200, 1500, 1800, 2100 or 2400 mm length, each available in 1.2 or 1.5 mm material thickness.

06 Drainage matched to length

Models from 900 to 1800 mm have one 40 mm diameter drainage outlet. The 2100 and 2400 mm models have two 40 mm diameter outlets.


05 Application information


Intended applications	Handwashing, Hospital Sinks
Industries	Hospitals & Clinics, Pharmaceutical Manufacturing, Research Laboratories

06 Supply and support

Typical lead time	10–15 working days
Warranty	24 months

Product drawings and images

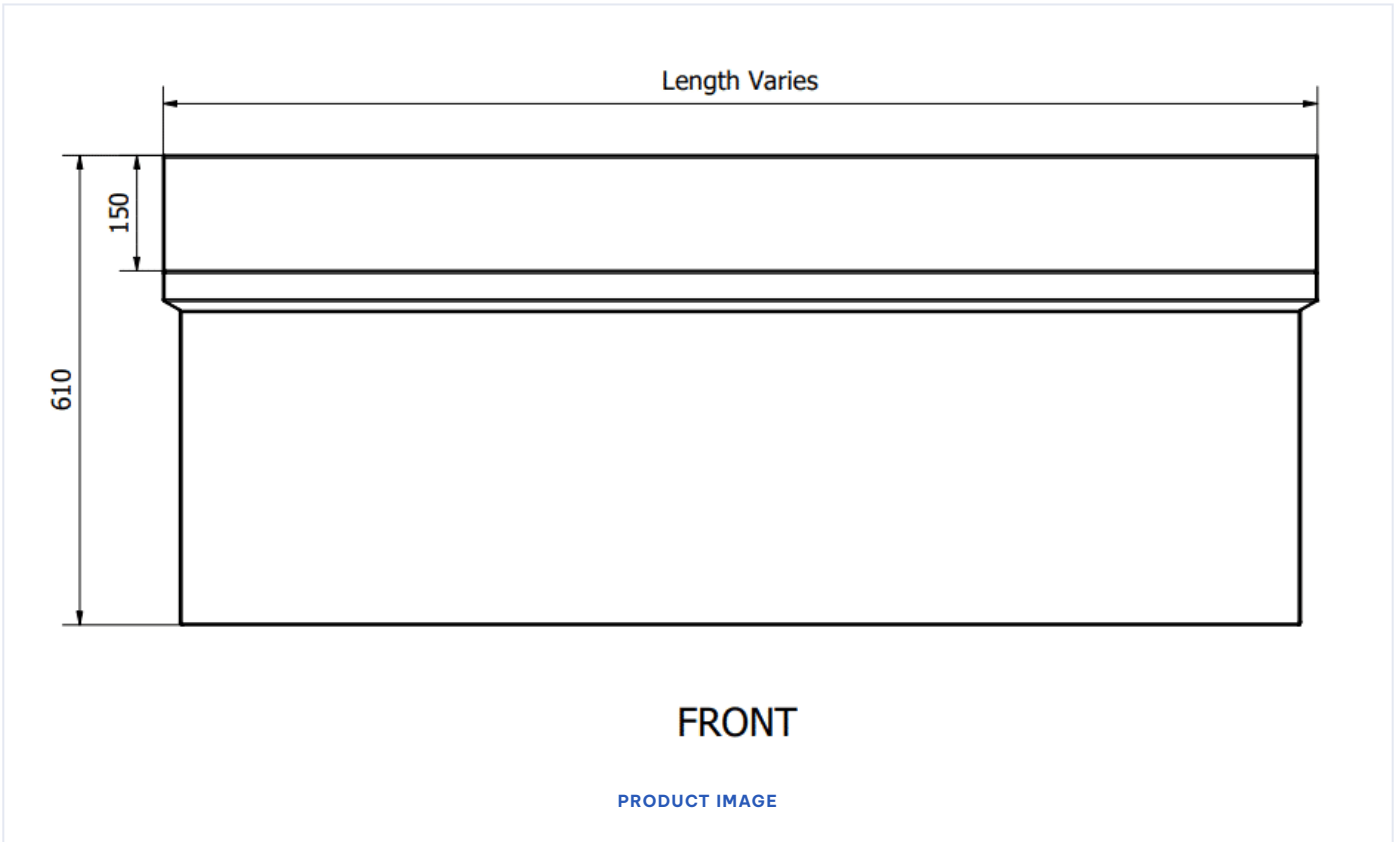

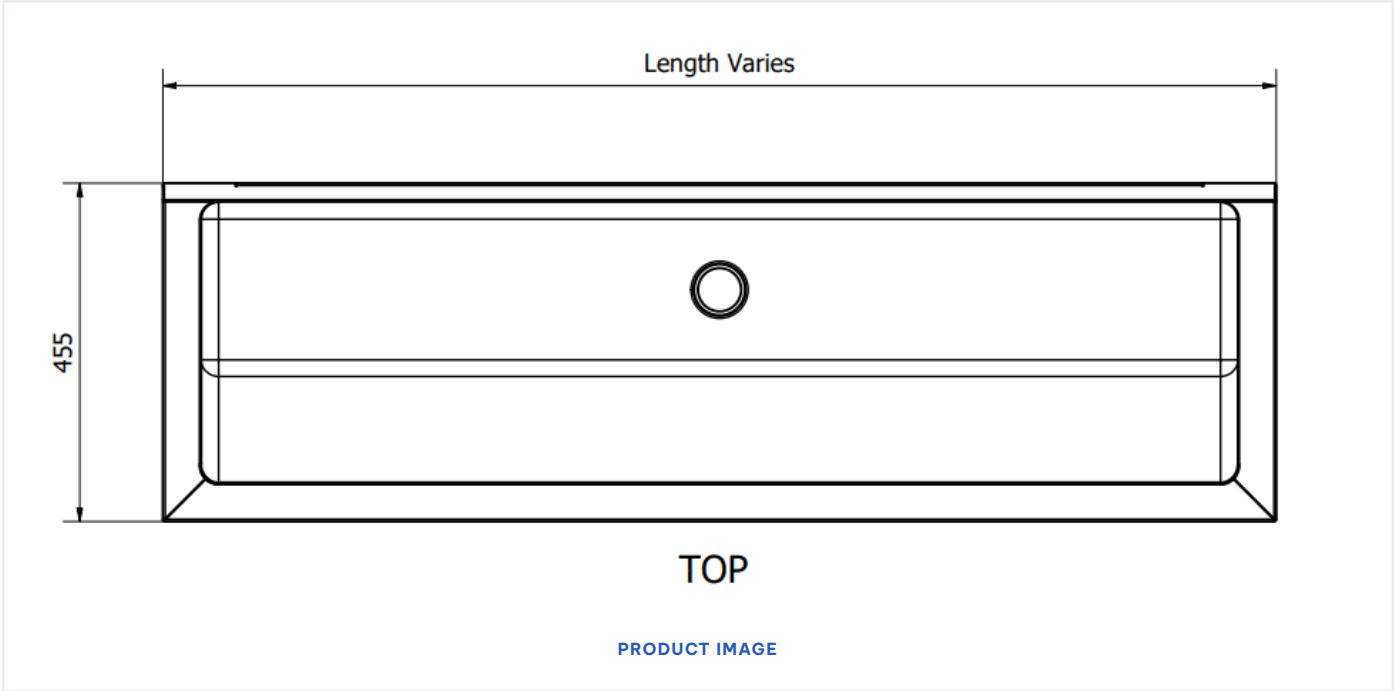

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.