
PRODUCT RANGE SPECIFICATION

B22320(WM) – Wall-Mounted Surgeon Scrub-Up Sink



PRODUCT IMAGE · 1800 mm, 1.5 mm wall-mounted model shown.

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	**B22320(WM){PSS}**	**14 Nov 2026**

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b22320wm-wall-mounted-surgeon-scrub-up-sink#specifications

01 Product description and specification

Product description

Wall-mounted Grade 304 stainless steel surgeon scrub-up sink with a polished satin finish and double-walled construction. Available in six lengths from 900 to 2400 mm and material thicknesses of 1.2 or 1.5 mm.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield B22320(WM) wall-mounted surgeon scrub-up sink in Grade 304 stainless steel with a polished satin finish and double-walled, pressed and welded construction. Length: 900, 1200, 1500, 1800, 2100 or 2400 mm. Material thickness: 1.2 or 1.5 mm. Overall width: 455 mm. Trough height: 620 mm excluding the integral 150 mm splashback. Bracket-supported wall mounting. Drainage: one 40 mm diameter outlet on 900–1800 mm models; two 40 mm diameter outlets on 2100 and 2400 mm models. Manufactured in South Africa.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.

03 Configuration options

Length	900 mm; 1200 mm; 1500 mm; 1800 mm; 2100 mm; 2400 mm
Material Thickness	1.2 mm; 1.5 mm

Options vary by model; not every combination is available. Use the product page to select a model.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

04 Functional features

01 Clear floor access
Bracket-supported wall mounting keeps the floor beneath the trough clear for cleaning.

02 Grade 304 stainless steel
Grade 304 stainless steel with a polished satin finish provides a durable surface for routine cleaning and maintenance.

03 Double-walled construction
The pressed and welded, double-walled trough provides rigidity for daily use in clinical handwashing areas.

04 Integral 150 mm splashback
The rear splashback helps protect the wall from water splashes during use.

05 Six lengths, two thicknesses
Choose 900, 1200, 1500, 1800, 2100 or 2400 mm length, each available in 1.2 or 1.5 mm material thickness.

06 Drainage matched to length
Models from 900 to 1800 mm have one 40 mm diameter drainage outlet. The 2100 and 2400 mm models have two 40 mm diameter outlets.

05 Application information

Intended applications	Handwashing, Hospital Sinks
Industries	Hospitals & Clinics, Pharmaceutical Manufacturing, Research Laboratories

06 Supply and support

Typical lead time	10–15 working days
Warranty	24 months

07 Frequently asked questions

What lengths are available?
The B22320(WM) range has six standard lengths: 900, 1200, 1500, 1800, 2100 and 2400 mm. Each length is available in both 1.2 mm and 1.5 mm material thickness, giving 12 published configurations.

What material and finish does the sink use?
The sink is manufactured from Grade 304 stainless steel with a polished satin finish. The trough has double-walled, pressed and welded construction, with a choice of 1.2 mm or 1.5 mm material thickness.


What are the width, trough height and splashback height?
All standard models are 455 mm wide. The trough height is 620 mm, excluding the integral 150 mm splashback. Length varies with the model selected.

How many drainage outlets does each model have?
The 900, 1200, 1500 and 1800 mm models have one 40 mm diameter drainage outlet. The 2100 and 2400 mm models have two 40 mm diameter outlets. The outlet arrangement is the same for both material thickness options.

How is the sink mounted?
The B22320(WM) uses a bracket-supported wall-mounted installation. This leaves the floor beneath the trough clear for cleaning.


Where is the B22320(WM) manufactured?
The B22320(WM) wall-mounted surgeon scrub-up sink is manufactured in South Africa.

Product drawings and images

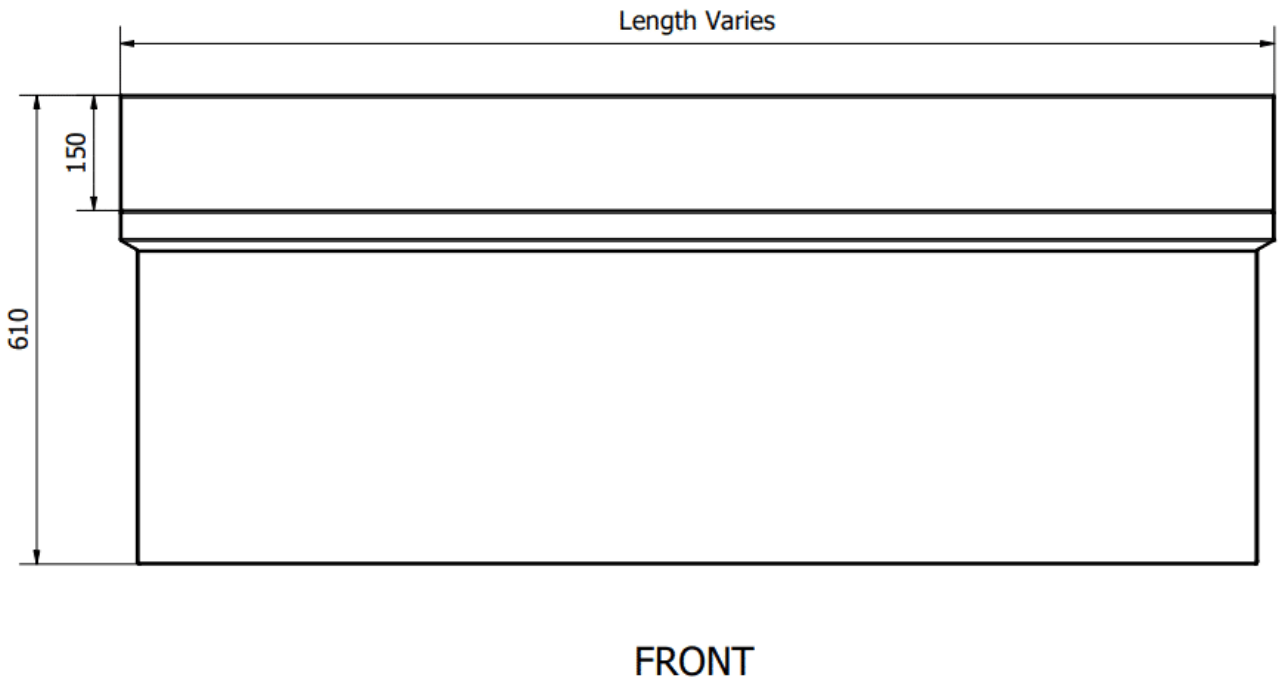

FRONT

PRODUCT IMAGE

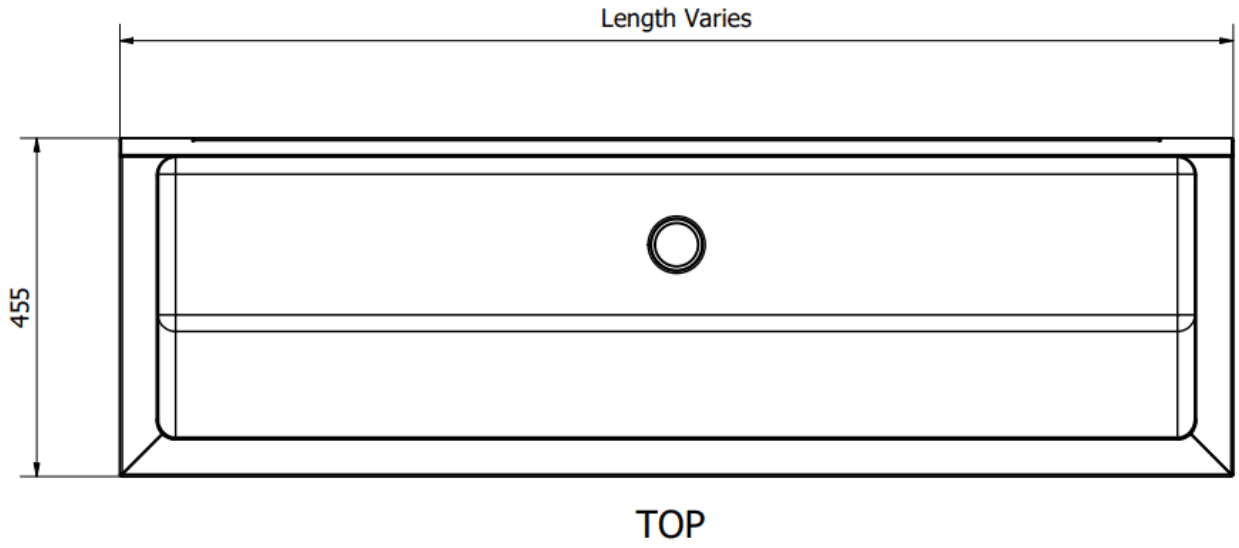

TOP

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.