PRODUCT RANGE SPECIFICATION

B22330(HLC) – Combination Bedpan & Wash-Up Sink with High-Level Cistern — Package #2



PRODUCT IMAGE · 1830 mm left-hand HLC configuration shown.

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	**B22330(HLC){PSS}**	**15 Nov 2026**

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b22330l-1830-hlc_2-combination-bedpan-wash-up-sink-with-high-level-cistern#specifications

01 Product description and specification

Product description

Combination bedpan and wash-up sink on gallows brackets with tapware package #2 and a high-level cistern. Available in 1830, 2135 or 2440 mm lengths with a left- or right-hand sluice outlet.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield B22330(HLC) combination bedpan and wash-up sink on gallows brackets with tapware package #2 and high-level cistern. Grade 304 stainless steel, satin finish, 110 mm sluice outlet and 40 mm wash-up outlet. Specify 1830, 2135 or 2440 mm length and left- or right-hand sluice outlet.

02 Configuration options

Length	1830 mm; 2135 mm; 2440 mm
Sluice outlet position	Left Hand; Right Hand

Options vary by model; not every combination is available. Use the product page to select a model.

03 Functional features

01 **Combined bedpan sluice and wash-up sink**
A bedpan sluice and adjacent wash-up sink combined in one unit.

02 **High-level cistern with package #2**
Includes tapware package #2 and a high-level cistern.

03 **Three standard lengths**
Available in 1830, 2135 and 2440 mm lengths.

04 **Left- or right-hand sluice outlet**
Both outlet positions are available in every standard length.

05 **Gallows-bracket mounting**
The sink is supplied on gallows brackets.

06 **Grade 304 stainless steel**
Manufactured from Grade 304 stainless steel with a satin finish.

07 **Internal wash-up sink drainage**
The 40 mm wash-up sink outlet drains internally to the 110 mm sluice outlet.

04 Application information

Intended applications	Hospital Sinks, Sluice Rooms (Dirty Utility Rooms)
Industries	Aged Care & Nursing Homes, Hospitals & Clinics

05 Supply and support

Typical lead time	10–15 working days
Warranty	24 months

06 Frequently asked questions

Which lengths are available?
The standard B22330 lengths are 1830, 2135 and 2440 mm. Each length is available with a left- or right-hand sluice outlet.


Can I choose a left- or right-hand outlet?
Yes. Every standard length is available with either a left-hand or right-hand sluice outlet.

What is the difference between T3, T4 and HLC?
T3 includes tapware package #3 with a 104 flush valve. T4 includes the same sink, T3 tapware and 104 flush valve, plus an elbow-operated hot-and-cold medical mixer as part of package #4. HLC uses tapware package #2 with a high-level cistern. All three packages are available in the same standard lengths and outlet positions.


Where is this combination sink used?
The B22330 combines bedpan sluicing and an adjacent wash-up sink for sluice rooms, also called dirty utility rooms, in hospitals, clinics, aged-care facilities and nursing homes.

How is the sink mounted?
The unit is supplied on gallows brackets.

Product drawings and images

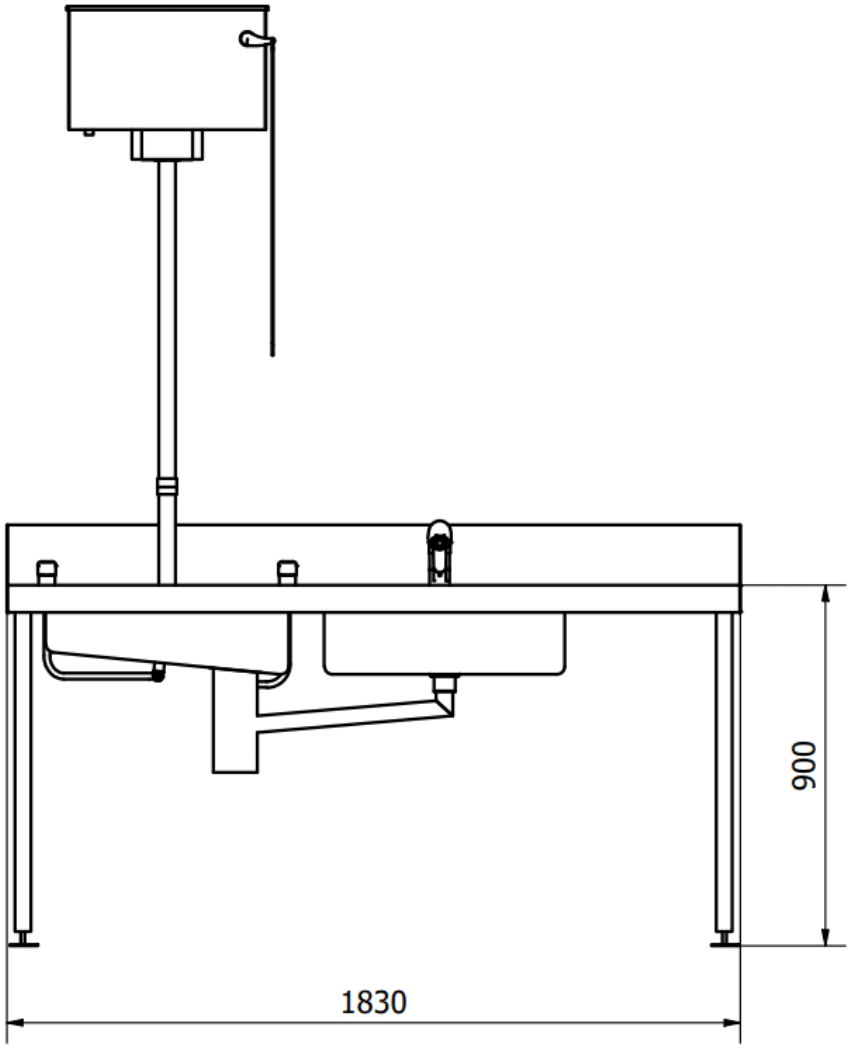

PRODUCT IMAGE · 1830 mm left-hand HLC configuration shown.

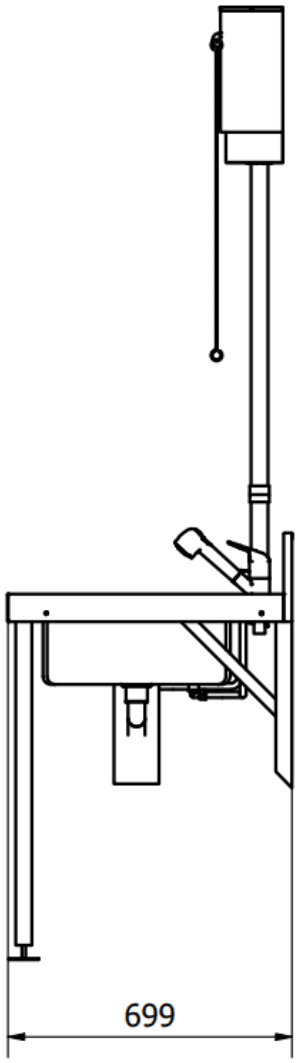

PRODUCT IMAGE · 1830 mm left-hand HLC configuration shown.

E&OE. Specifications are subject to change without notice.