
MODEL SPECIFICATION

B22330(L-1830-T3) – Combination Bedpan & Wash Up Sink 1830mm (l) T3

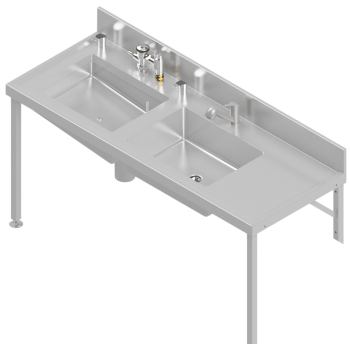

PRODUCT IMAGE

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Model	B22330(L-1830-T3){PSS}	Published catalogue data	7 Nov 2026

01 Model specification

Combination Bedpan and Wash-Up Sink, 1830 mm Long, Left Hand Sluice, on Gallows Brackets, with Tapware Package #3, 104 Flush Valve.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Bowl Orientation	Left Hand	–	Left-hand or right-hand position of the sluice outlet on the combination unit.
Length	1830	mm	The length of the item typically as measured from left to right.

03 Dimensions and mass

PARAMETER	VALUE	UNIT
Length	1830	mm

04 Model and supply data

Parent product	B22330(T3) — Combination Bedpan & Wash-Up Sink with Tapware Package #3
Typical lead time	10–15 working days
Warranty	24 months

05 Specification notes

Configuration description	Combination bedpan and wash-up sink, 1830 mm long, left hand sluice, on gallows brackets, with tapware package #3, 104 flush valve. This left-hand 1830 mm model is documented in Grade 304 stainless steel with a satin finish.

121 Koornhof Road, Meadowdale, Germiston, South Africa, 1614 · hello@basterfield.co.za · basterfield.co.za · +27 87 095 5357

Short Form Specification	**SPECIFICATION USE** Use this description when specifying this model. Basterfield B22330(L-1830-T3). Combination bedpan and wash-up sink, 1830 mm long, left hand sluice, on gallows brackets, with tapware package #3, 104 flush valve. Grade 304 stainless steel, satin finish.
Detailed specification	• Length: 1830 mm • Sluice position: Left Hand • Tapware package: #3 • Flushing: 104 flush valve • Mounting: gallows brackets • Material: Grade 304 stainless steel • Finish: satin

06 Frequently asked questions

Which lengths are available?

The standard B22330 lengths are 1830, 2135 and 2440 mm. Each length is available with a left- or right-hand sluice outlet.

Can I choose a left- or right-hand outlet?

Yes. Every standard length is available with either a left-hand or right-hand sluice outlet.

What is the difference between T3, T4 and HLC?

T3 includes tapware package #3 with a 104 flush valve. T4 includes the same sink, T3 tapware and 104 flush valve, plus an elbow-operated hot-and-cold medical mixer as part of package #4. HLC uses tapware package #2 with a high-level cistern. All three packages are available in the same standard lengths and outlet positions.


Where is this combination sink used?

The B22330 combines bedpan sluicing and an adjacent wash-up sink for sluice rooms, also called dirty utility rooms, in hospitals, clinics, aged-care facilities and nursing homes.


How is the sink mounted?

The unit is supplied on gallows brackets.

Product drawings and images

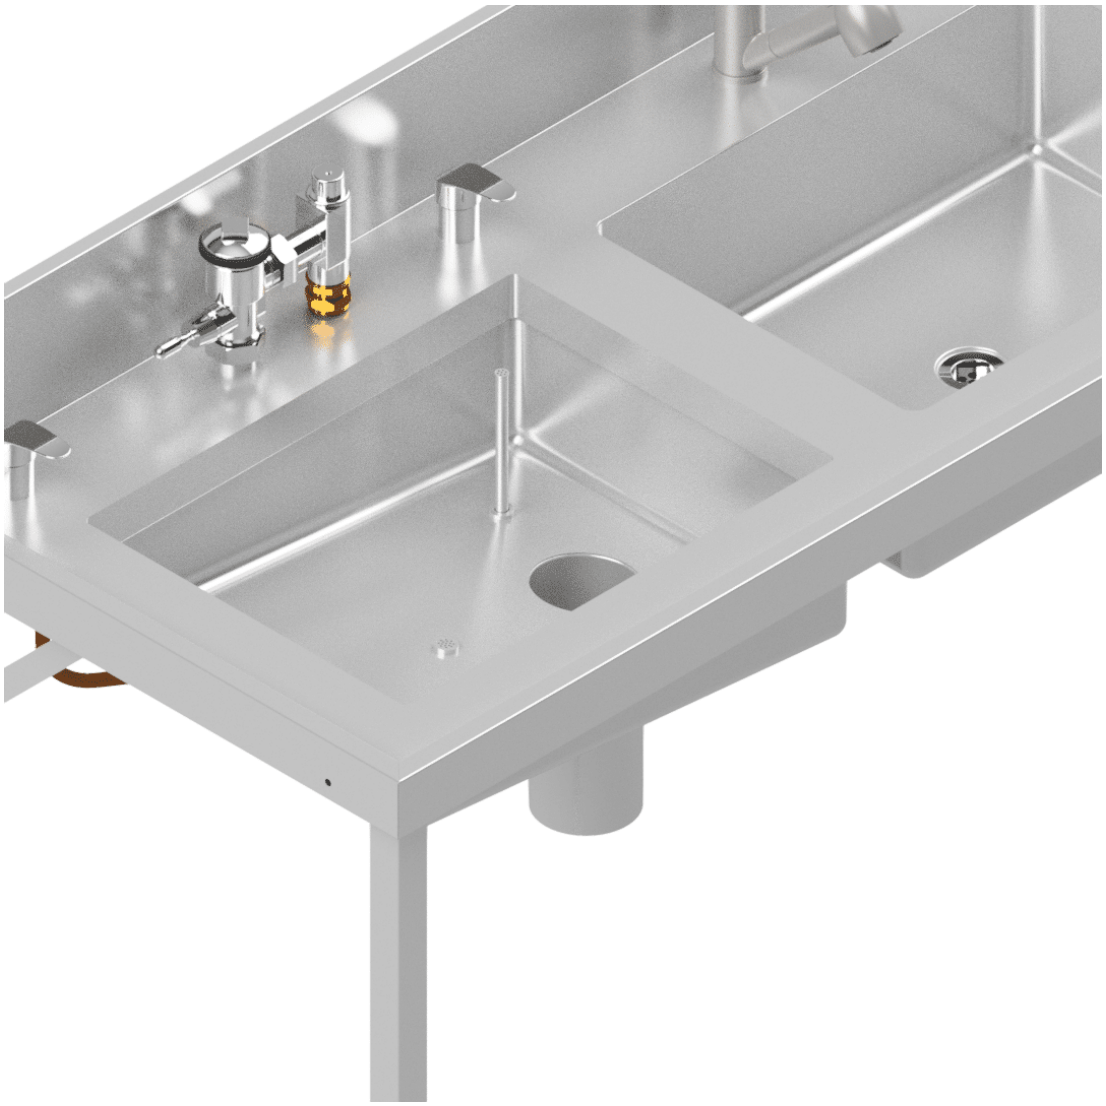

PRODUCT IMAGE

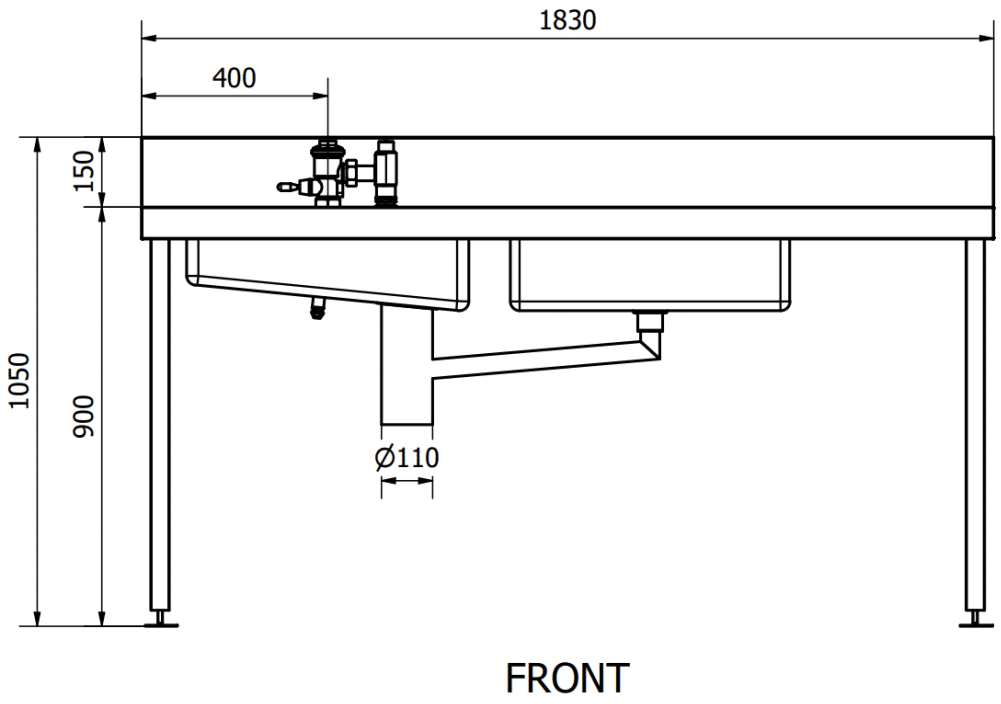

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.