

PRODUCT RANGE SPECIFICATION

B22336(112-1800-106) – 1800 mm Slop Hopper and Wash Basin with 106 Flush Valve

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	B22336(112-1800-106){PSS}	Published catalogue data	14 Sep 2026

01 Product description and specification

Product description	1800 mm combination slop hopper and wash basin with a 106 flush valve for healthcare and institutional sluice rooms. B22336 (112-1800-106) Combination Slop Hopper and Wash Basin 1800 mm (L) with 106 Flush Valve is a robust, hygienic, and space-efficient stainless-steel unit, purpose-designed for demanding institutional environments such as hospitals, clinics, care facilities, and public health centres. Manufactured from Grade 304 stainless steel, the unit is highly durable and corrosion-resistant, ensuring a long service life even under rigorous daily use. The unit features an integrated slop hopper with a flushing rim and a top-entry Walcro 106 Flush Valve for efficient and hygienic waste disposal. The slop hopper and cistern can be configured on either the left or right side to suit installation requirements. The hopper includes a 110 mm outlet suitable for direct connection to standard sewerage systems. A hinged bucket grid is available as an optional extra for added functionality. Adjacent to the hopper is a wash hand basin with a 40 mm waste outlet, allowing for convenient and hygienic handwashing. Optional tapware can be supplied as required. Further to the right, a draining area provides added utility for drying and staging. The unit is 1800 mm in length, with other lengths available on request. It comes equipped with heavy-duty mounting brackets for secure and easy wall installation. A 110 mm high rear splashback helps protect adjacent surfaces from water damage and enhances hygiene control.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B22336(112-1800-106). 1800 mm Slop Hopper and Wash Basin with 106 Flush Valve. Inlet Valve Orientation: Left, Right. Bucket Grid: No, Yes. The hopper includes a 110 mm outlet suitable for direct connection to standard sewerage systems. Adjacent to the hopper is a wash hand basin with a 40 mm waste outlet, allowing for convenient and hygienic handwashing.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B22336(LT-112-1800-106)	B22336(LT-112-1800-106) Combination Slop Hopper and Wash Basin 1800mm (L) with Left-Hand Hopper and 106 Flush Valve Inlet Valve Orientation: Left. Bucket Grid: No.	Bucket Grid: No Inlet Valve Orientation: Left

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B22336(LTG-112-1800-106)	B22336(LTG-112-1800-106) Combination Slop Hopper and Wash Basin 1800mm (L) with Left-Hand Hopper, 106 Flush Valve and Bucket Grid Inlet Valve Orientation: Left. Bucket Grid: Yes.	Bucket Grid: Yes Inlet Valve Orientation: Left
B22336(RT-112-1800-106)	B22336(RT-112-1800-106) Combination Slop Hopper and Wash Basin 1800mm (L) with Right-Hand Hopper and 106 Flush Valve Inlet Valve Orientation: Right. Bucket Grid: No.	Bucket Grid: No Inlet Valve Orientation: Right
B22336(RTG-112-1800-106)	B22336(RTG-112-1800-106) Combination Slop Hopper and Wash Basin 1800mm (L) with Right-Hand Hopper, 106 Flush Valve and Bucket Grid Inlet Valve Orientation: Right. Bucket Grid: Yes.	Bucket Grid: Yes Inlet Valve Orientation: Right

03 Application information

Intended applications	Sluice Rooms (Dirty Utility Rooms)
Industries	Hospitals & Clinics

04 Supply and support

Typical lead time	10-15 working days
Warranty	12 months


Product drawings and images




PRODUCT IMAGE



PRODUCT IMAGE

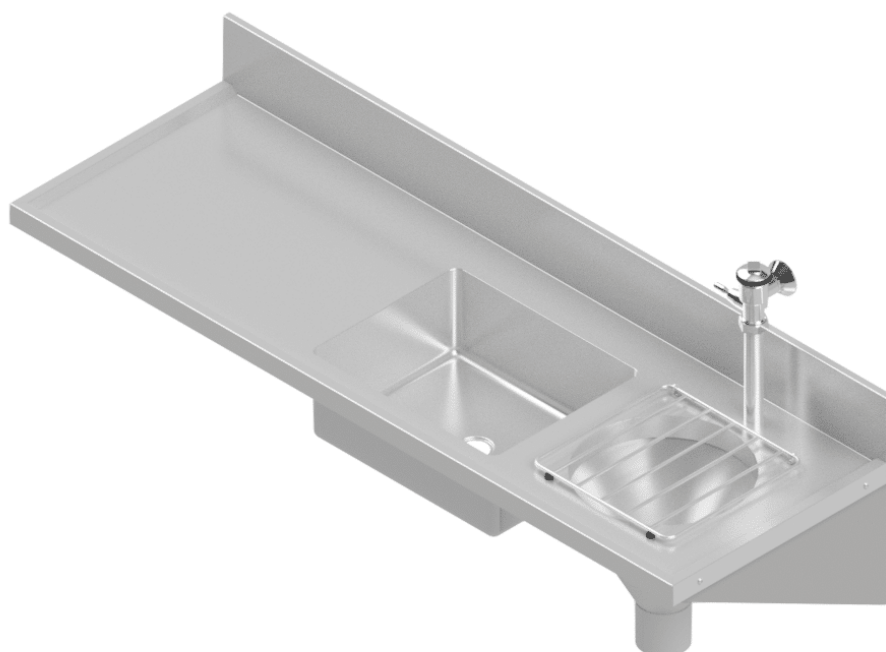

PRODUCT IMAGE

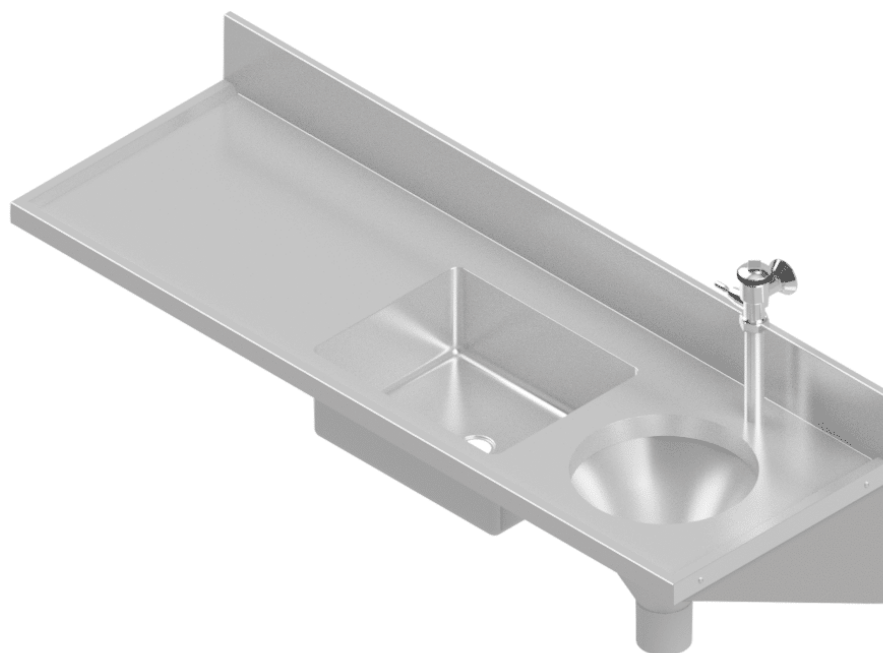

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.