MODEL SPECIFICATION

B22360(TG-106) – Slop Hopper (TG-106)



PRODUCT IMAGE

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Model	B22360(TG-106){PSS}	13 Nov 2026

01 Model specification

Wall-Mounted Grade 304 Stainless Steel Slop Hopper with Top-Entry Flush Pipe, Hinged Bucket Grid and Walcro 106 Flush Valve. Supplied Without an Integral Trap.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Trap Type	Without Integral Trap	–	–
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Bucket Grid	Yes	–	–
Flushing Inlet Orientation	Top Entry	–	–

03 Model and supply data

Parent product	B22360(TG-106) — Wall-Hung Stainless Steel Slop Hopper with Grid & Flush Valve
Typical lead time	10–15 working days
Warranty	12 months

04 Specification notes

Configuration description

Wall-mounted Grade 304 stainless steel slop hopper with a bucket grid and Walcro 106 flush valve. Available with or without an integral stainless steel P-trap.

The pressed and welded stainless steel construction has smoothly finished welds and a satin finish. The hinged bucket grid supports receptacles over the hopper and lifts for cleaning access.

Both configurations include a top-entry flush pipe, hinged bucket grid and Walcro 106 flush valve. B22360(TG-106) has no integral trap; B22360(TG-106-P) includes an integral stainless steel P-trap for a 110 mm soil-pipe connection.

Intended for waste disposal in hospital, clinic and institutional sluice rooms.

Short Form Specification

> **SPECIFICATION USE**
> Use this description when specifying this model.

Basterfield B22360(TG-106). Wall-mounted Grade 304 stainless steel slop hopper with top-entry flush pipe, hinged bucket grid and Walcro 106 flush valve. Supplied without an integral trap.

05 Frequently asked questions

Where is this model used?

It is intended for waste disposal in healthcare and institutional sluice rooms, including hospital and clinic dirty utility rooms.

What flushing components are supplied?

Both configurations include a top-entry flush pipe, hinged bucket grid and Walcro 106 flush valve. B22360(TG-106) has no integral trap; B22360(TG-106-P) includes an integral stainless steel P-trap for a 110 mm soil-pipe connection.

What is the bucket grid for?

The hinged grid supports a bucket over the hopper and folds up to provide access for cleaning.

How is this hopper supported?

The hopper is wall mounted using stainless steel gallows brackets.


What is the difference between TG-106 and TG-106-P?

Both include the Walcro 106 flush valve and bucket grid. TG-106-P also includes an integral stainless steel P-trap for connection to a 110 mm soil pipe; TG-106 has no integral trap.

Product drawings and images




PRODUCT IMAGE

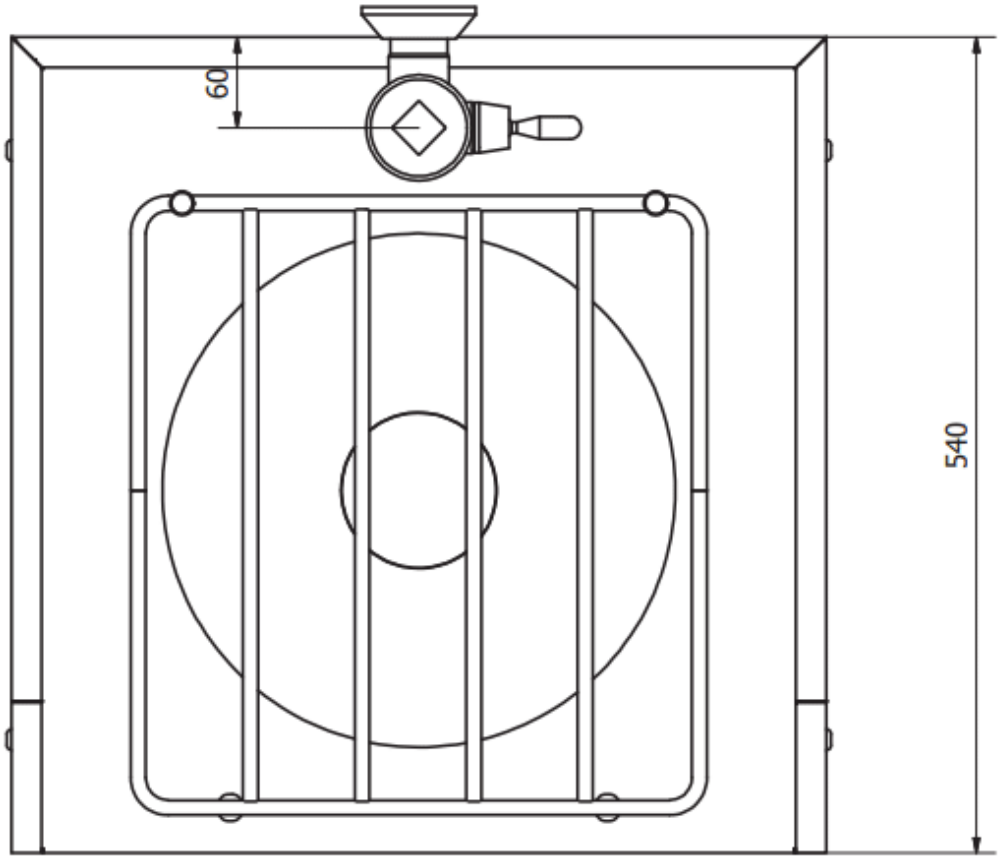

PLAN

PRODUCT IMAGE

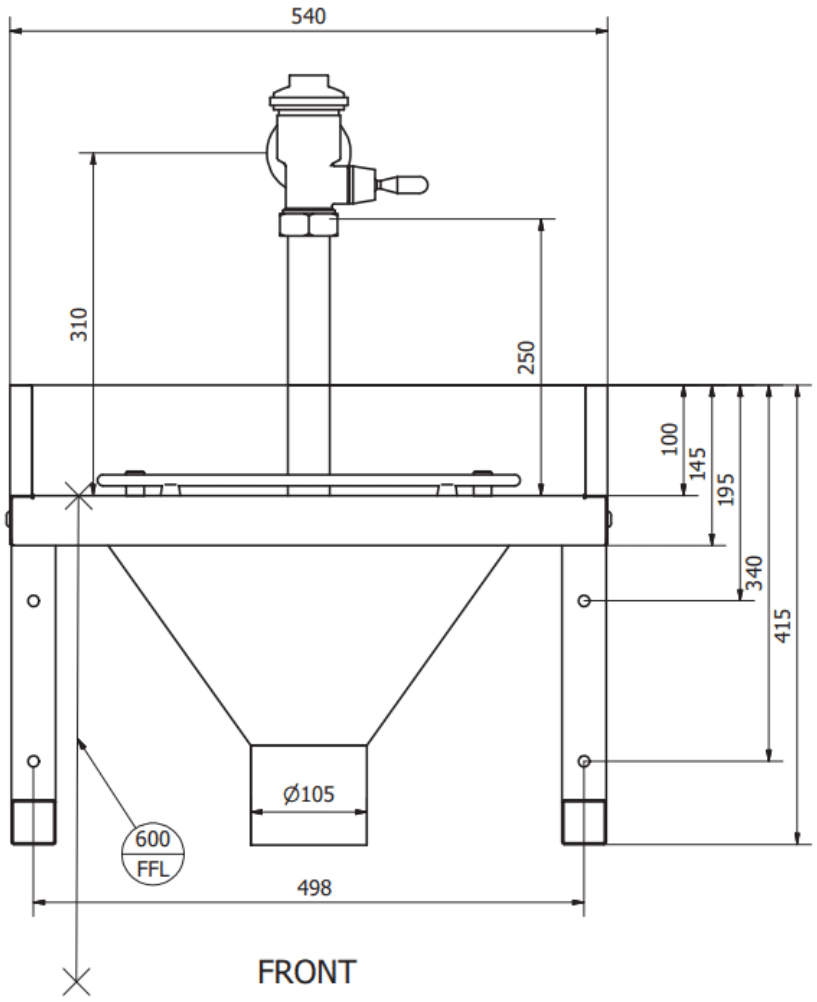

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.