

PRODUCT RANGE SPECIFICATION

B22360(TG-106) – Wall-Hung Stainless Steel Slop Hopper with Grid & Flush Valve

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	B22360(TG-106){PSS}	Published catalogue data	14 Sep 2026

01 Product description and specification

Product description	Wall-hung stainless steel slop hopper with a bucket grid and flush valve for waste disposal in institutional sluice rooms. Constructed from AISI 304 grade stainless steel, the hopper is designed to handle frequent and intensive use. Its pressed and fully welded design ensures structural strength, and all joints are meticulously ground and polished to a smooth satin finish for superior cleanability and corrosion resistance. The hopper features a waste outlet to accommodate a standard 100 mm diameter trap, and includes a hinged grid at the rear to allow for easy access and waste handling. The unit is securely wall-mounted using 38 × 38 mm stainless steel tubular gallows brackets for reliable support. For efficient flushing and sanitation, the unit is factory-fitted with a Walcro 106 Flush Valve, offering high-volume water flow with manual operation.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B22360(TG-106). Wall-Hung Stainless Steel Slop Hopper with Grid & Flush Valve. The hopper features a waste outlet to accommodate a standard 100 mm diameter trap, and includes a hinged grid at the rear to allow for easy access and waste handling. The unit is securely wall-mounted using 38 × 38 mm stainless steel tubular gallows brackets for reliable support.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B22360(TG-106)	SLOP HOPPER TOP ENTRY FLUSH PIPE, GRID AND 106 FLUSH VALVE	Standard configuration

03 Application information

Intended applications	Sluice Rooms (Dirty Utility Rooms)
Industries	Hospitals & Clinics


04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images




PRODUCT IMAGE

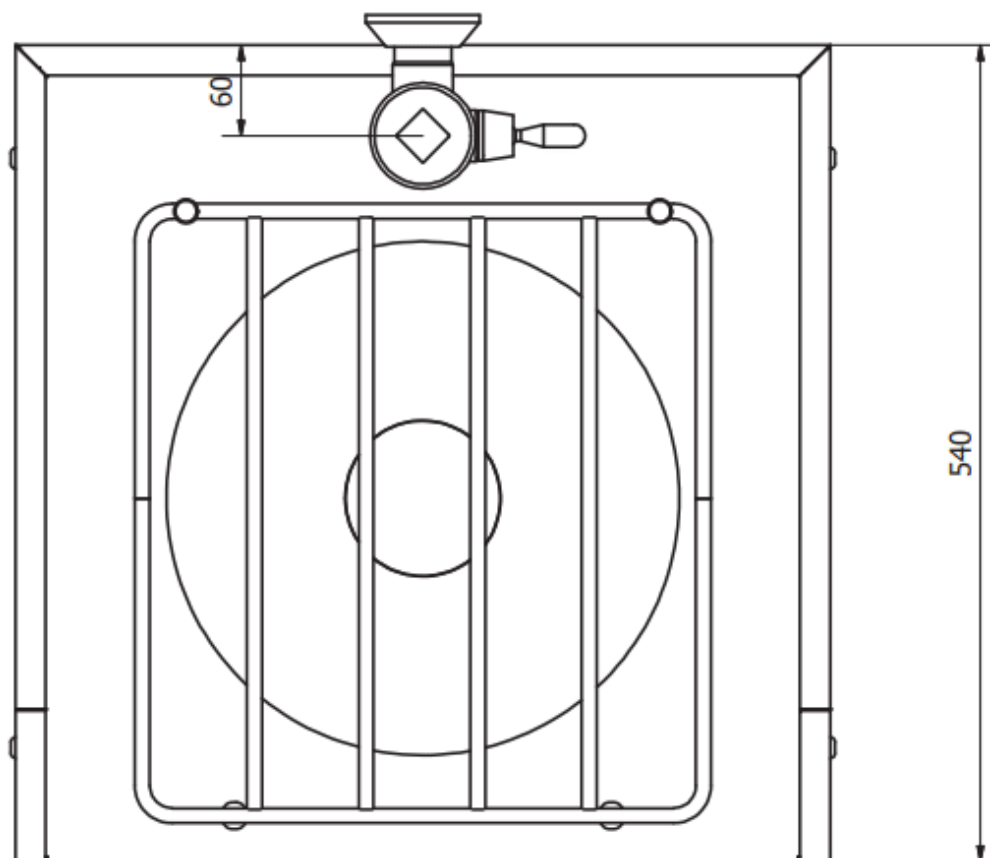

PLAN

PRODUCT IMAGE

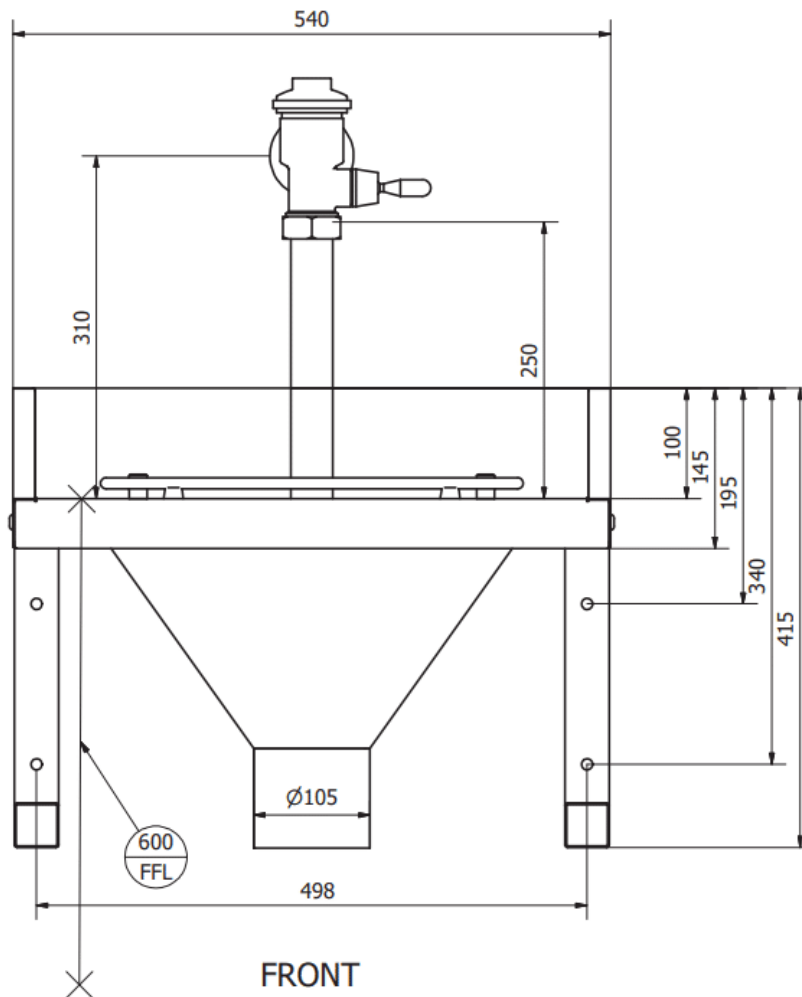

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.