

PRODUCT RANGE SPECIFICATION

B22360(TG-106) – Wall-Hung
Stainless Steel Slop Hopper with
Grid & Flush Valve



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE

Product range

DOCUMENT REFERENCE

B22360(TG-106){PSS}

DATA STATUS

Published catalogue data

GENERATED ON

4 Oct 2026

01 Product description and specification

Product description

Wall-mounted Grade 304 stainless steel slop hopper with a bucket grid and Walcro 106 flush valve. Available with or without an integral stainless steel P-trap.

The pressed and welded stainless steel construction has smoothly finished welds and a satin finish. The hinged bucket grid supports receptacles over the hopper and lifts for cleaning access.

Both configurations include a top-entry flush pipe, hinged bucket grid and Walcro 106 flush valve. B22360(TG-106) has no integral trap; B22360(TG-106-P) includes an integral stainless steel P-trap for a 110 mm soil-pipe connection.

Intended for waste disposal in hospital, clinic and institutional sluice rooms.

Compare the stainless steel slop hopper range.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B22360(TG-106). Wall-mounted Grade 304 stainless steel slop hopper with a bucket grid and Walcro 106 flush valve. Available with or without an integral stainless steel P-trap.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B22360(TG-106)	Wall-Mounted Grade 304 Stainless Steel Slop Hopper with Top-Entry Flush Pipe, Hinged Bucket Grid and Walcro 106 Flush Valve. Supplied Without an Integral Trap.	Trap Type: Without Integral Trap
B22360(TG-106-P)	Grade 304 Stainless Steel Slop Hopper with Top-Entry Flush Pipe, Hinged Bucket Grid, Walcro 106 Flush Valve and Integral Stainless Steel P-Trap for 110 mm Soil Pipes.	Trap Type: P-Trap

03 Functional features

01	Grade 304 stainless steel Pressed and welded stainless steel with a satin finish provides a smooth surface for routine cleaning.
02	Hinged bucket grid The rear-hinged grid supports a bucket over the hopper and lifts to provide access for cleaning.
03	Integral stainless steel P-trap option Choose the P-trap configuration where an integral stainless steel trap is required; the standard configuration is supplied without an integral trap.
04	Walcro 106 flush valve Both configurations include the specified flush valve and top-entry flush pipe.

04 Application information

Intended applications	Hospital Sinks, Sluice Rooms (Dirty Utility Rooms)
Industries	Hospitals & Clinics


05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images




PRODUCT IMAGE

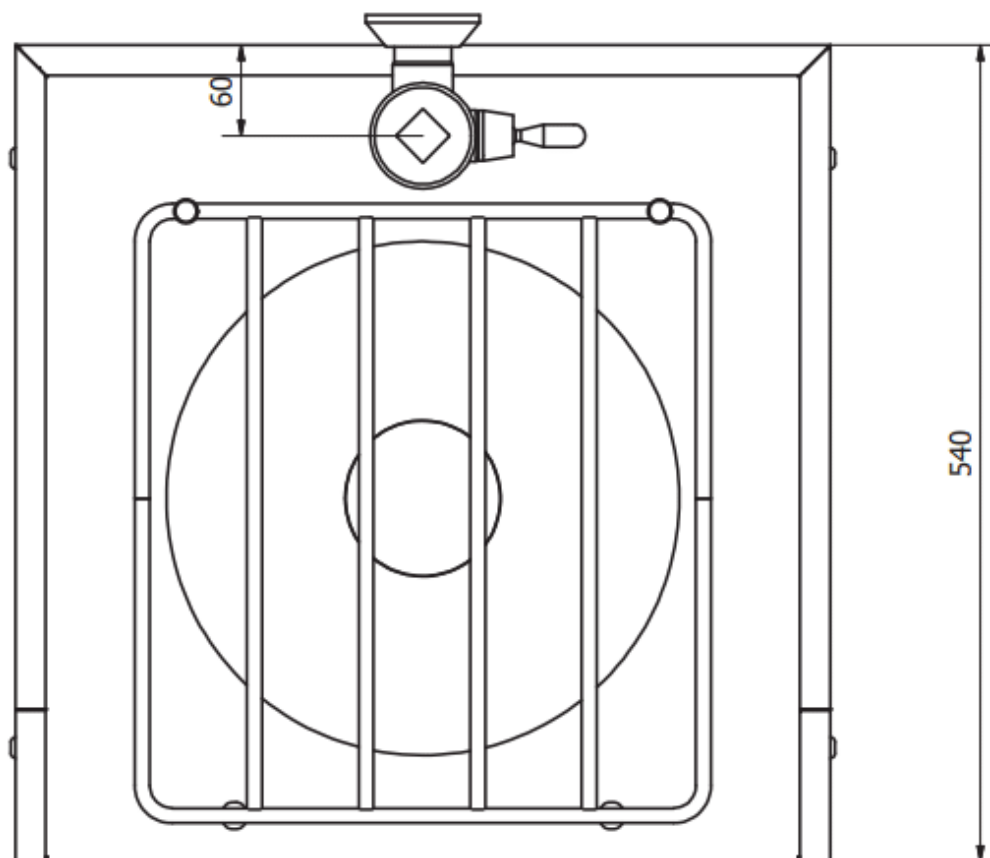

PLAN

PRODUCT IMAGE

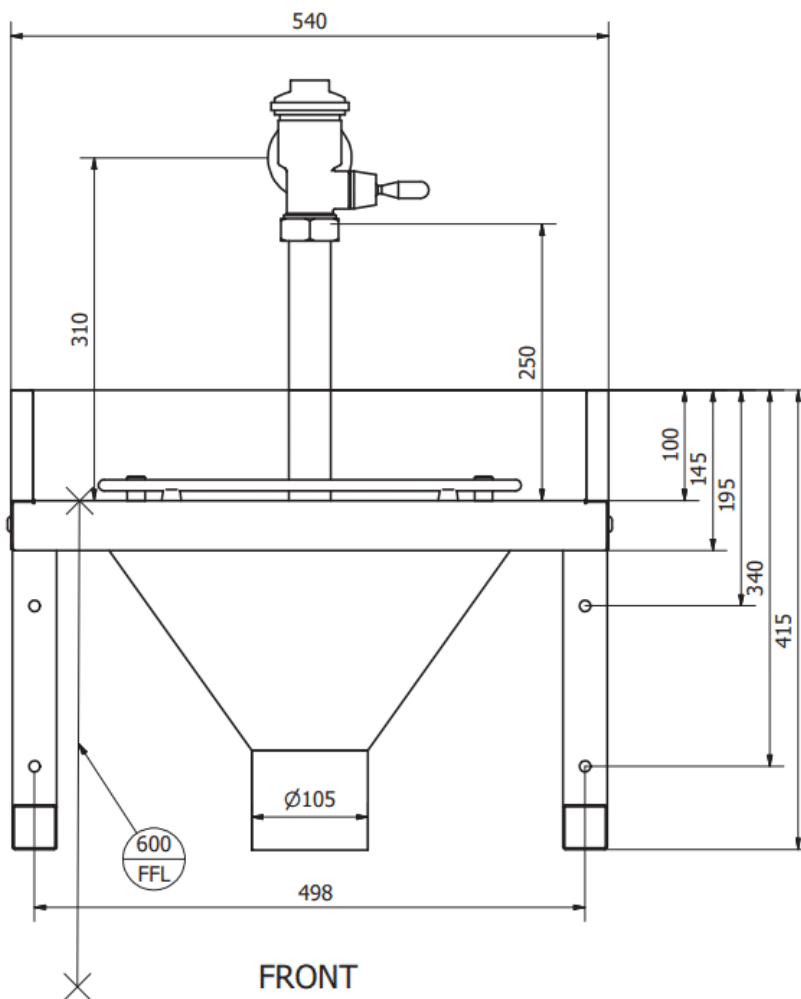

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.