PRODUCT RANGE SPECIFICATION

B22360(TG-106) – Wall-Hung Stainless Steel Slop Hopper with Grid & Flush Valve



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B22360(TG-106){PSS}	14 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b22360tg-106-wall-hung-stainless-steel-slop-hopper-with-grid-flush-valve#specifications

01 Product description and specification

Product description	Wall-mounted Grade 304 stainless steel slop hopper with a bucket grid and Walcro 106 flush valve. Available with or without an integral stainless steel P-trap.
Short Form Specification	**SPECIFICATION USE** Use this description when specifying this product range. Basterfield B22360(TG-106). Wall-mounted Grade 304 stainless steel slop hopper with a bucket grid and Walcro 106 flush valve. Available with or without an integral stainless steel P-trap.

02 Configuration options

Integral stainless steel trap	P-Trap; Without Integral Trap

Options vary by model; not every combination is available. Use the product page to select a model.

03 Functional features

01 **Grade 304 stainless steel**
Pressed and welded stainless steel with a satin finish provides a smooth surface for routine cleaning.

02 **Hinged bucket grid**
The rear-hinged grid supports a bucket over the hopper and lifts to provide access for cleaning.

03 **Integral stainless steel P-trap option**
Choose the P-trap configuration where an integral stainless steel trap is required; the standard configuration is supplied without an integral trap.

04 **Walcro 106 flush valve**
Both configurations include the specified flush valve and top-entry flush pipe.

04 Application information

Intended applications	Hospital Sinks, Sluice Rooms (Dirty Utility Rooms)

04 Application information

Industries	Hospitals & Clinics

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Frequently asked questions

Where is this model used?

It is intended for waste disposal in healthcare and institutional sluice rooms, including hospital and clinic dirty utility rooms.

What flushing components are supplied?

Both configurations include a top-entry flush pipe, hinged bucket grid and Walcro 106 flush valve. B22360(TG-106) has no integral trap; B22360(TG-106-P) includes an integral stainless steel P-trap for a 110 mm soil-pipe connection.

What is the bucket grid for?

The hinged grid supports a bucket over the hopper and folds up to provide access for cleaning.

How is this hopper supported?

The hopper is wall mounted using stainless steel gallows brackets.


What is the difference between TG-106 and TG-106-P?

Both include the Walcro 106 flush valve and bucket grid. TG-106-P also includes an integral stainless steel P-trap for connection to a 110 mm soil pipe; TG-106 has no integral trap.

Product drawings and images




PRODUCT IMAGE

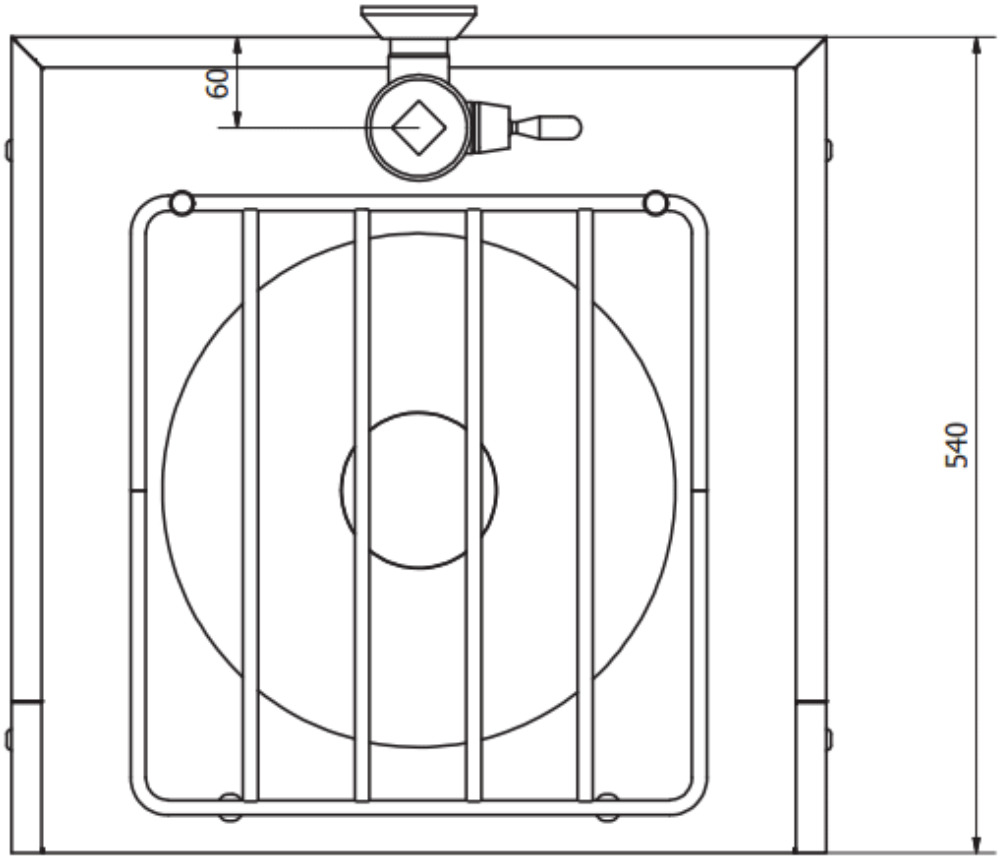

PLAN

PRODUCT IMAGE

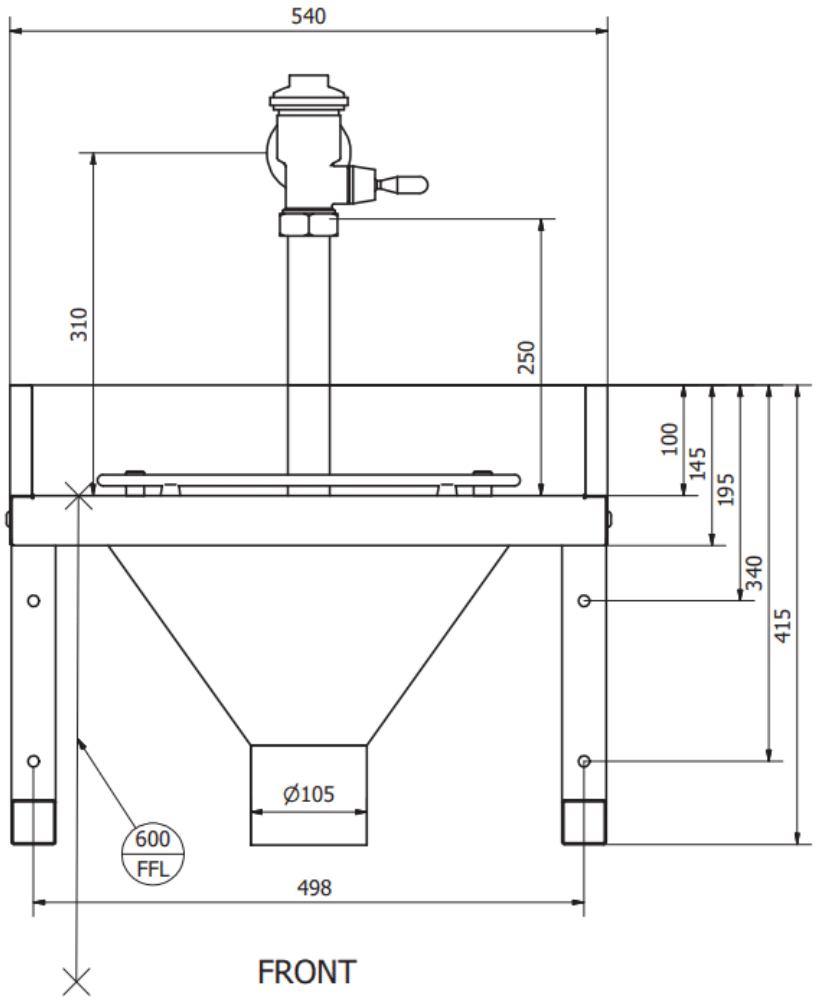

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.