PRODUCT RANGE SPECIFICATION

B22360(TG-LLC) – Stainless Steel Slop Hopper with Low Level Cistern & Bucket Grid



PRODUCT IMAGE

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	GENERATED ON
Product range	B22360(TG-LLC){PSS}	14 Nov 2026

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b22360tg-llc-stainless-steel-slop-hopper-with-low-level-cistern-bucket-grid#specifications

01 Product description and specification

Product description

Wall-mounted Grade 304 stainless steel slop hopper with a fold-up bucket grid, 11 L low-level cistern and stainless steel flush pipe.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield B22360(TG-LLC) Grade 304 stainless steel slop hopper; 1.2 mm body, 0.9 mm hopper and cistern; 540 × 540 mm hopper; rear and side splashbacks; flushing rim; 110 mm waste outlet; fold-up grid of 8 mm round bar; 1175 mm installed height. Includes 11 L low-level cistern with adjustable flush mechanism, front right-hand lever, bottom inlet and stainless steel flush pipe; 40 × 40 mm gallows brackets.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Length	540	mm	The length of the item typically as measured from left to right.
Width	540	mm	The width of the item typically as measured from front to back.
Splashback Height	100	mm	Height of the splashback above the tabletop or working surface.
Material	Stainless Steel Grade 304	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material Thickness	1.2	mm	The thickness of the material used for the item's primary construction. The thickness of individual components may vary.

03 Functional features

01 Grade 304 stainless steel construction

The main body is manufactured from 1.2 mm-thick Grade 304 stainless steel, while the hopper and cistern are manufactured from 0.9 mm-thick Grade 304 stainless steel. The corrosion-resistant, readily cleanable surfaces support routine hygiene management and daily use.

02 Integral flushing rim with 11-litre low-level cistern

An integral flushing rim is paired with a wall-mounted 11-litre low-level cistern and stainless steel flush pipe, providing a flushing arrangement for rinsing the hopper. The cistern has an adjustable internal flush mechanism, a right-hand front-mounted lever and a bottom-entry water inlet.

03 Hinged fold-up stainless steel bucket grid

The hinged bucket grid supports receptacles during emptying and folds up to give direct access to the hopper for cleaning.

04 Ø110 mm waste outlet

The hopper incorporates a Ø110 mm waste outlet for connection to the soil drainage system.

05 Heavy-duty stainless steel wall brackets

Heavy-duty 40 mm x 40 mm stainless steel square tubular gallows brackets provide wall-mounted support for the hopper.

04 Application information

Intended applications	Hospital Sinks, Sluice Rooms (Dirty Utility Rooms)
Industries	Aged Care & Nursing Homes, Hospitals & Clinics, Schools

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Frequently asked questions

Where is this slop hopper intended to be used?

This slop hopper is intended for hygienic disposal of soiled liquids and receptacle contents in healthcare and institutional sluice rooms. Stated applications include hospitals, clinics, care facilities, laboratories and other commercial or institutional environments requiring a dedicated sluice-room waste-disposal fixture.

What are the hopper dimensions?

The hopper measures 540 mm long by 540 mm wide.

What is supplied with the slop hopper?

The unit includes a wall-mounted 11-litre low-level cistern, stainless steel flush pipe and heavy-duty 40 mm × 40 mm stainless steel square tubular gallows brackets for wall mounting. It also incorporates a hinged fold-up stainless steel bucket grid.


What drainage connection does the hopper require?

The hopper has a Ø110 mm waste outlet for connection to the soil drainage system. Drainage connection requirements should be verified for the installation site.


Are water, drainage and wall fixings included in the installation?

Water supply, support fixings and drainage connections must be installed and verified for the site by suitably qualified trades, in accordance with applicable local requirements. The supporting wall must be suitable for the wall-mounted installation.


Product drawings and images

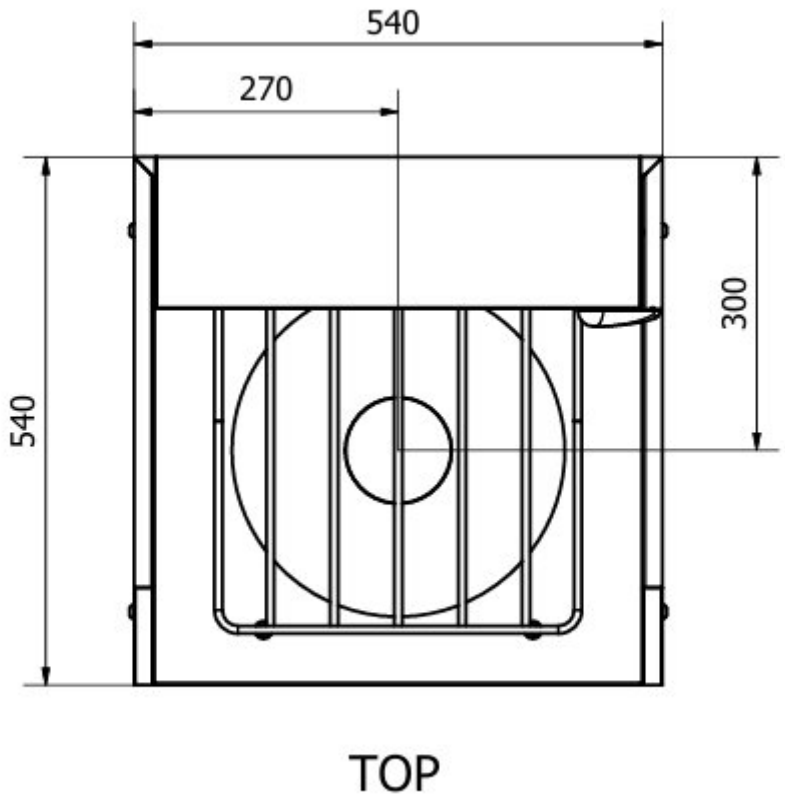


TOP VIEW

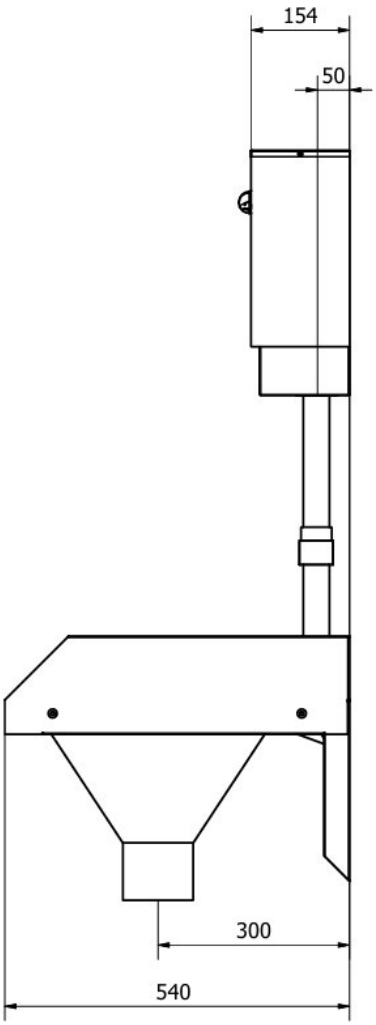

RIGHT VIEW

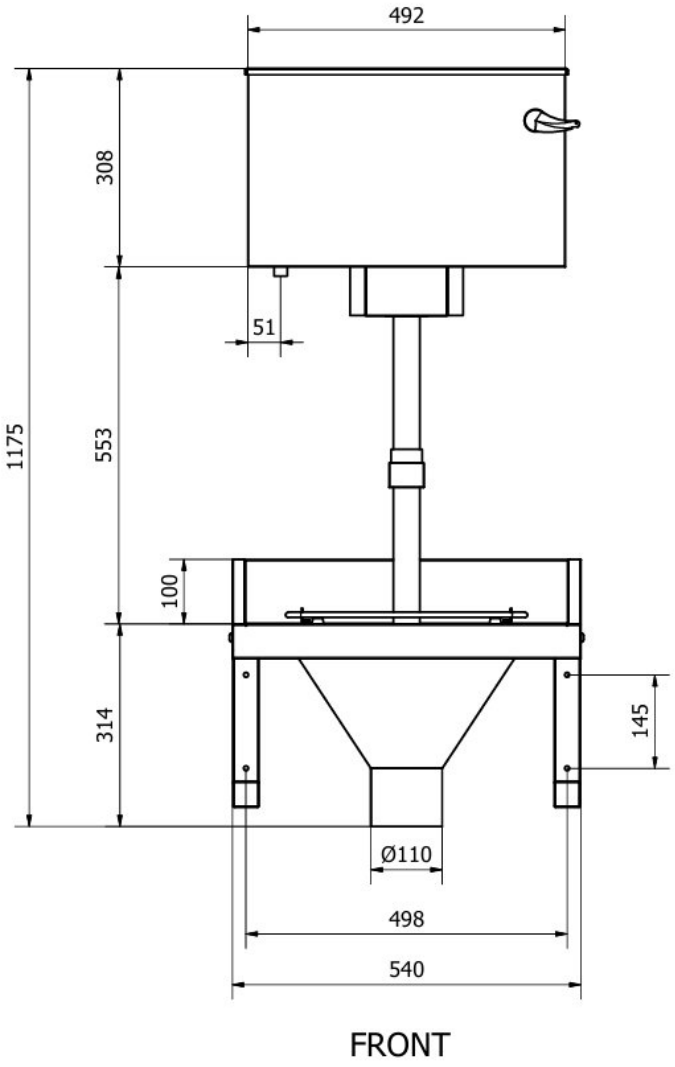


FRONT VIEW

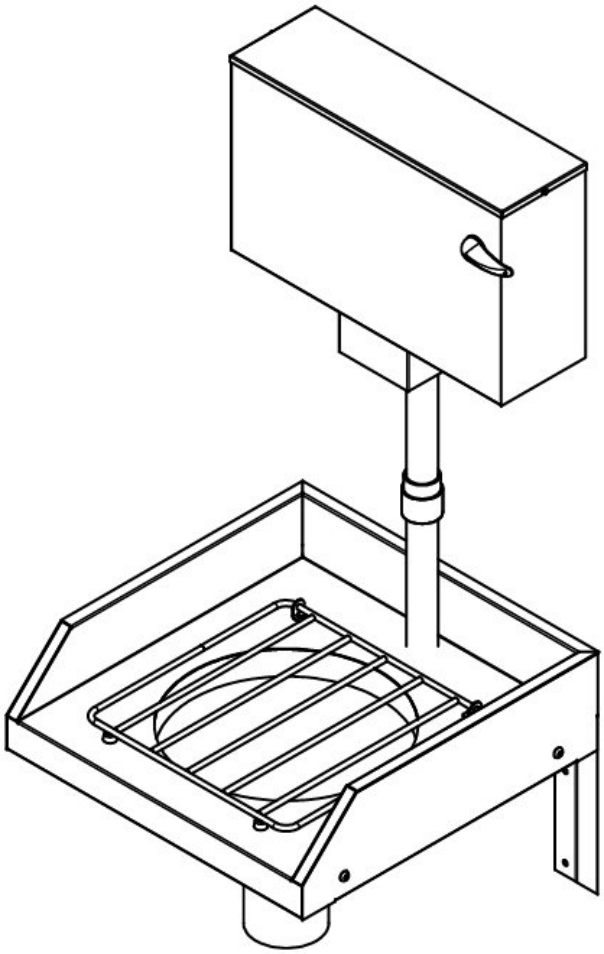

TOP RIGHT

ISOMETRIC VIEW

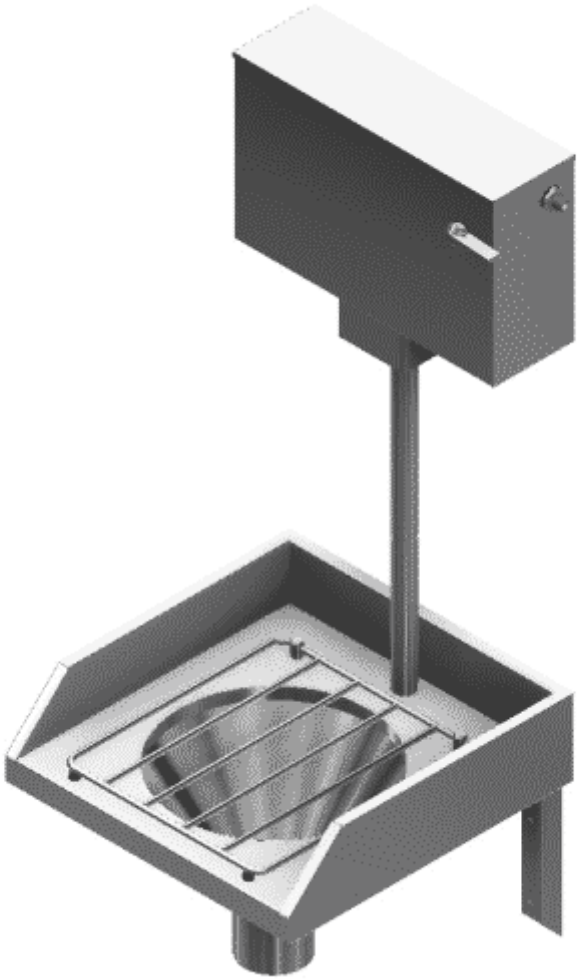

PRODUCT IMAGE

E&OE. Specifications are subject to change without notice.