

PRODUCT RANGE SPECIFICATION

B22360(TG-LLC) – Stainless Steel Slop Hopper with Low Level Cistern & Bucket Grid



PRODUCT IMAGE

① Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE

Product range

DOCUMENT REFERENCE

B22360(TG-LLC){PSS}

DATA STATUS

Published catalogue data

GENERATED ON

5 Oct 2026

01 Product description and specification

Product description

The B22360(TG-LLC) is a wall-mounted slop hopper for hospital, clinic and institutional sluice rooms. It combines a Grade 304 stainless steel hopper with a fold-up bucket grid and low-level cistern.

The main body is made from 1.2 mm stainless steel; the hopper and cistern use 0.9 mm stainless steel. Pressed and welded construction with a satin finish provides surfaces for routine cleaning.

The 11 L low-level cistern has an adjustable flushing mechanism, a front right-hand lever and bottom-entry water inlet. A stainless steel flush pipe connects the cistern to the hopper's integral flushing rim.

The hopper has a 110 mm waste outlet. Stainless steel gallows brackets support wall mounting, and the hinged grid lifts to provide access for cleaning.

Compare the stainless steel slop hopper range.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B22360(TG-LLC) Grade 304 stainless steel slop hopper; 1.2 mm body, 0.9 mm hopper and cistern; 540 × 540 mm hopper; rear and side splashbacks; flushing rim; 110 mm waste outlet; fold-up grid of 8 mm round bar; 1175 mm installed height. Includes 11 L low-level cistern with adjustable flush mechanism, front right-hand lever, bottom inlet and stainless steel flush pipe; 40 × 40 mm gallows brackets.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Length	540	mm	The length of the item typically as measured from left to right.
Width	540	mm	The width of the item typically as measured from front to back.
Splashback Height	100	mm	Height of the splashback above the tabletop or working surface.

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 304	—	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Material Thickness	1.2	mm	The thickness of the material used for the item's primary construction. The thickness of individual components may vary.

03 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B22360(TG-LLC)	Wall-Mounted Grade 304 Stainless Steel Slop Hopper with a Fold-Up Bucket Grid, 11 L Low-Level Cistern and Stainless Steel Flush Pipe.	Standard configuration

04 Functional features

01	Grade 304 stainless steel construction The main body is manufactured from 1.2 mm-thick Grade 304 stainless steel, while the hopper and cistern are manufactured from 0.9 mm-thick Grade 304 stainless steel. The corrosion-resistant, readily cleanable surfaces support routine hygiene management and daily use.
02	Integral flushing rim with 11-litre low-level cistern An integral flushing rim is paired with a wall-mounted 11-litre low-level cistern and stainless steel flush pipe, providing a flushing arrangement for rinsing the hopper. The cistern has an adjustable internal flush mechanism, a right-hand front-mounted lever and a bottom-entry water inlet.
03	Hinged fold-up stainless steel bucket grid The hinged bucket grid supports receptacles during emptying and folds up to give direct access to the hopper for cleaning.
04	Ø110 mm waste outlet The hopper incorporates a Ø110 mm waste outlet for connection to the soil drainage system.
05	Heavy-duty stainless steel wall brackets Heavy-duty 40 mm x 40 mm stainless steel square tubular gallows brackets provide wall-mounted support for the hopper.


05 Application information

Intended applications	Hospital Sinks, Sluice Rooms (Dirty Utility Rooms)
Industries	Aged Care & Nursing Homes, Hospitals & Clinics, Schools

06 Supply and support


Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

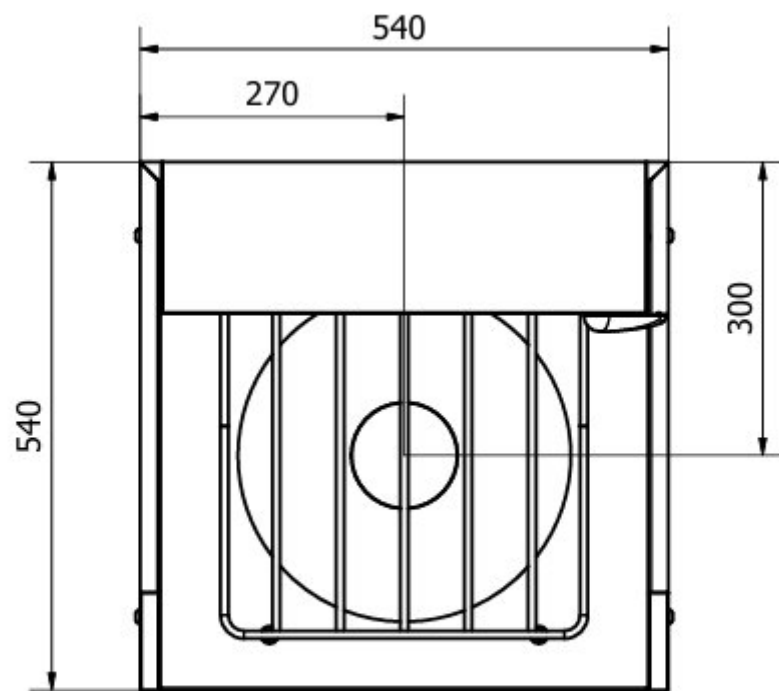


TOP

TOP VIEW

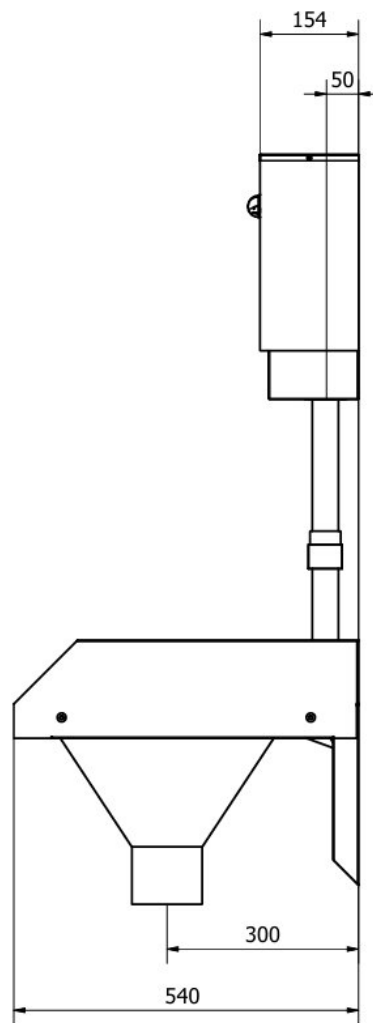


RIGHT

RIGHT VIEW

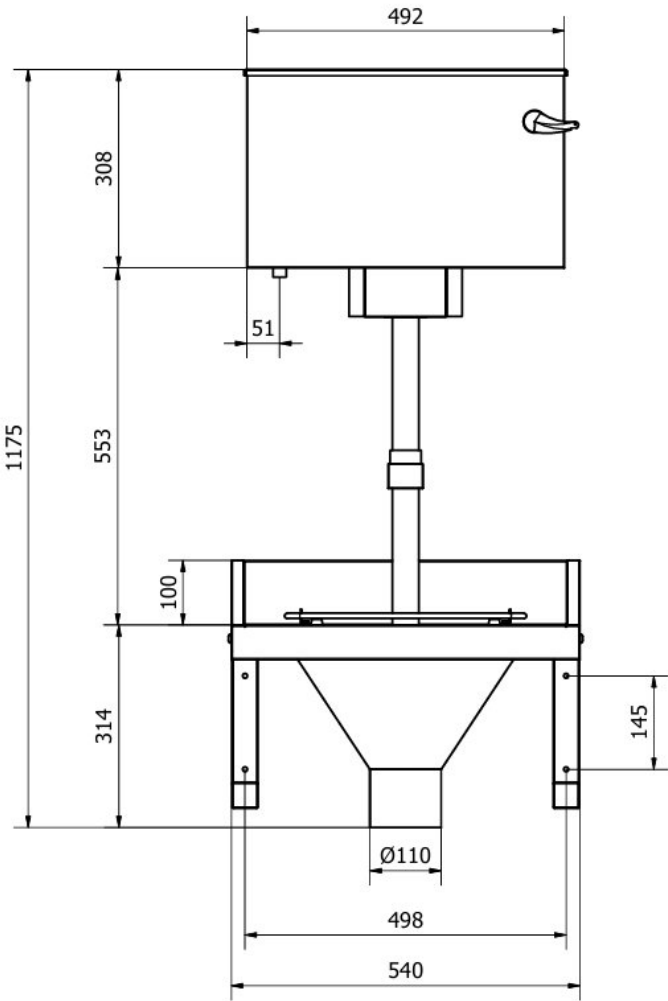


FRONT

FRONT VIEW

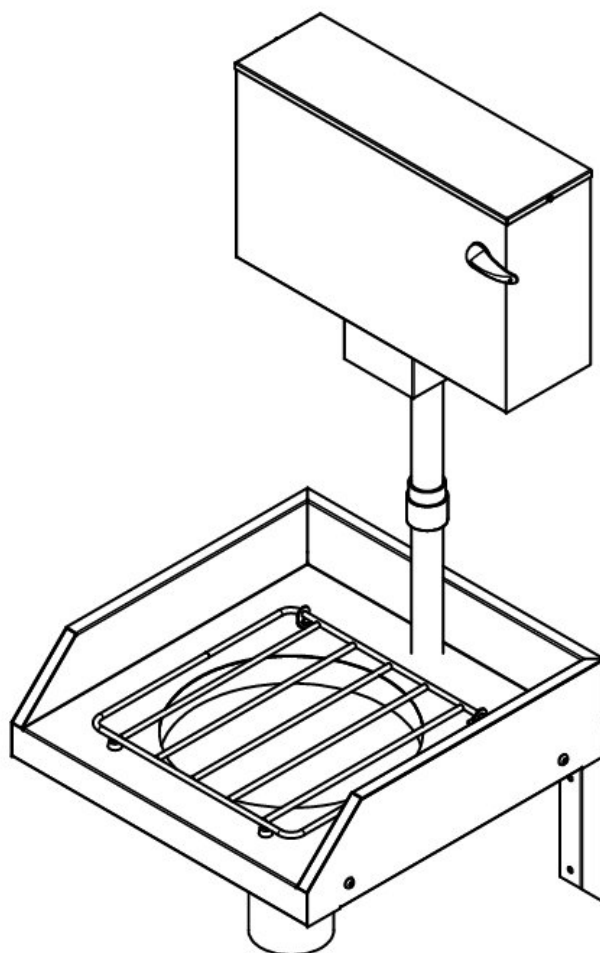

TOP RIGHT

ISOMETRIC VIEW

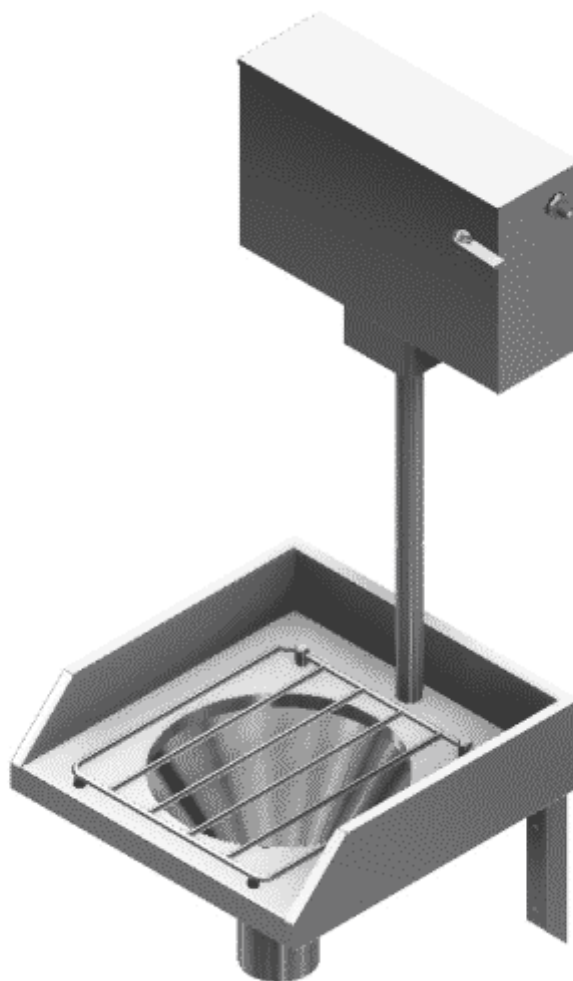

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.