

PRODUCT RANGE SPECIFICATION

B22360(TG) – Slop Hopper Top Entry With Grid

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B22360(TG){PSS}	DATA STATUS Published catalogue data	GENERATED ON 14 Sep 2026
---------------------------------	---------------------------------------	---	-----------------------------

01 Product description and specification

Product description

Slop hopper with a bucket grid and top-entry flushing connection for waste disposal in institutional sluice rooms.

Fabricated from 1.2 mm thick Grade 304 stainless steel, the unit provides exceptional durability, corrosion resistance, and easy maintenance. The fully welded and pressed construction ensures structural integrity, with all welds ground smooth and polished to a satin finish for optimal hygiene.

The wall-mounted design allows for easy cleaning underneath, making it suited to high-use environments where sanitation is a priority. The integrated hinged bucket grid enhances functionality by facilitating efficient waste disposal and easy cleaning access.

Key Features & Construction:

- Wall-mounted design for space efficiency and improved cleanliness.
- Fully welded construction with ground smooth, polished satin finish.
- Heavy-duty 38 × 38 mm stainless steel tubular gallows brackets for secure wall mounting.
- Integrated hinged bucket grid at the back for improved waste handling.

Plumbing & Drainage:

- 100 mm waste hole for efficient drainage.
- No flushing mechanism included—designed for applications where external plumbing solutions are used.

Ideal Applications:

- Hospitals & Healthcare Facilities.
- Nursing Homes & Care Centers.
- Commercial Cleaning & Janitorial Stations.
- Prisons, Schools & Public Institutions.

This model is similar to the B22360(TG-106), B22360(TG-LLC), and B22360(TG#1-HLC), but does not include a cistern or flushing mechanism. It is designed for use with an external flushing system or manual waste disposal setup.

Short Form Specification

SPECIFICATION USE

Use this description when specifying this product range.

Basterfield B22360(TG). Slop Hopper Top Entry With Grid. Heavy-duty 38 × 38 mm stainless steel tubular gallows brackets for secure wall mounting. 100 mm waste hole for efficient drainage.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B22360(TG)	Slop Hopper With Top Entry Flush Pipe, Grid & Gallows Brackets To B22360(tg){pss}	Standard configuration


03 Application information

Intended applications	Sluice Rooms (Dirty Utility Rooms)
Industries	Hospitals & Clinics

04 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

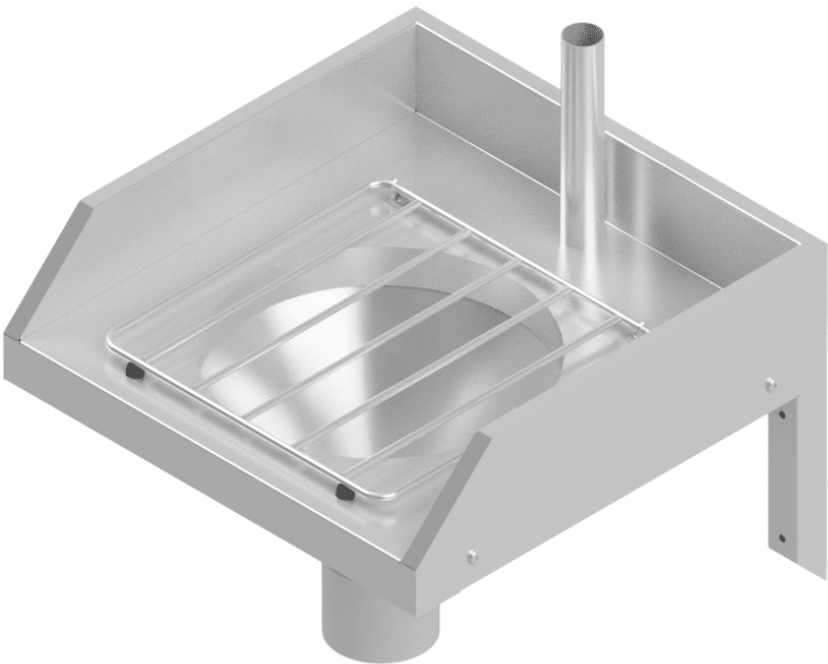

PRODUCT IMAGE



PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.