

PRODUCT RANGE SPECIFICATION

B30425(TR3) – Three-Roll Stainless Steel Toilet Roll Holder

DOCUMENT SCOPE Product range	DOCUMENT REFERENCE B30425(TR3){PSS}	DATA STATUS Published catalogue data	GENERATED ON 20 Sep 2026
---------------------------------	--	---	-----------------------------

01 Product description and specification

Product description	The Basterfield B30425(TR3) holds 3 toilet rolls in a one-piece Grade 304 stainless steel body with a satin finish. It is intended for storing and dispensing toilet rolls in commercial and institutional washrooms. Paper is dispensed manually. A front sight opening lets staff check when replenishment is needed, and empty rolls can be removed without opening the lid. The lid has a key-operated lock and is supplied with a universal key.
Short Form Specification	SPECIFICATION USE Use this description when specifying this product range. Basterfield B30425(TR3); 3-roll capacity; one-piece Grade 304 stainless steel body with satin finish; manual dispensing; front sight opening; lockable lid, universal key supplied; empty rolls removable without opening the lid.

02 Models and configurations

MODEL	DESCRIPTION	PUBLISHED CONFIGURATION
B30425(TR3)	Three-roll toilet roll holder; one-piece Grade 304 stainless steel body, satin finish; manual dispensing, front sight opening and lockable lid; universal key supplied. Empty rolls removable without opening the lid.	Standard configuration

03 Functional features

01	Three-Roll Capacity Holds 3 toilet rolls.
02	Grade 304 Stainless Steel One-piece body with a satin finish.
03	Manual Dispensing Toilet paper is dispensed manually.
04	Front Sight Opening Front sight opening for checking when replenishment is needed.
05	Lockable Lid Universal key supplied. Empty rolls can be removed without opening the lid.

04 Application information

Intended applications	Public Restrooms
-----------------------	------------------


04 Application information

Industries	Government & Public Sector , Hospitals & Clinics
------------	--

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

Product drawings and images

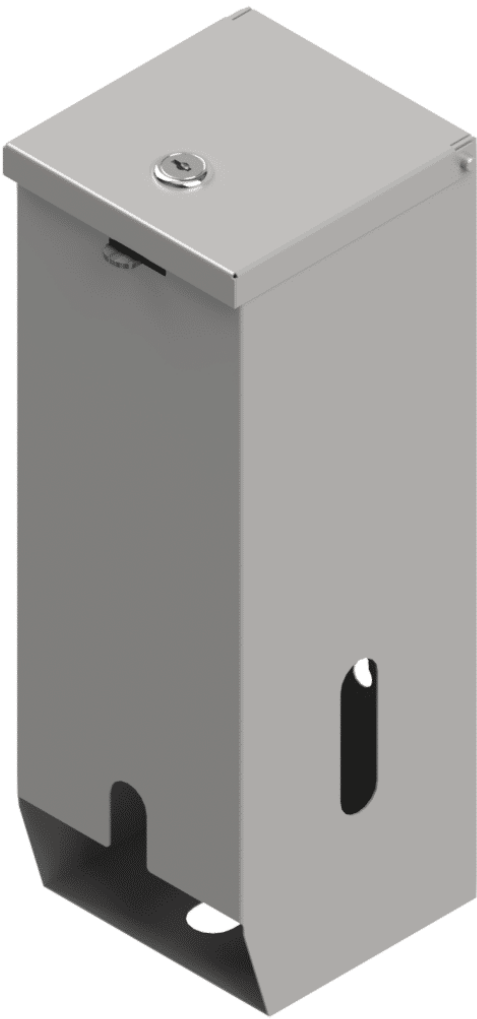

PRODUCT IMAGE

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.