PRODUCT RANGE SPECIFICATION

B30848 – Wall Mounted Breathalyser Straw Dispenser



PRODUCT IMAGE · B30848 breathalyser straw dispenser with hinged lid, opening tab and wall mounting brackets.

ⓘ Product image is representative of the range and may not reflect the actual item.

DOCUMENT SCOPE	DOCUMENT REFERENCE	DATA STATUS	GENERATED ON
Product range	**B30848{PSS}**	**Published catalogue data**	**1 Nov 2026**

Detailed item specifications

View available models and configuration options on the product page. Select a model to download its detailed specification sheet with dimensions, technical specifications and drawings. Scan the QR code or follow the link below.

https://basterfield.co.za/products/b30848-wall-mounted-breathalyser-straw-dispenser#specifications

01 Product description and specification

Product description

Wall mounted breathalyser straw dispenser in 0.9mm Grade 430 stainless steel, with a 260mm internal length to accommodate the straws, satin brushed finish, hinged lid with opening tab, hemmed body edges, rounded corners and mounting brackets.

Short Form Specification

SPECIFICATION USE
Use this description when specifying this product range.

Basterfield B30848 wall mounted breathalyser straw dispenser in 0.9mm Grade 430 stainless steel with a satin brushed finish. Internal length: 260mm to accommodate the length of the straws. Overall envelope including projecting brackets and lid tab: 290mm (L) × 252mm (W, front to back) × 806mm (H). Weight: 5.950kg. Hinged lid with tab for ergonomic opening, hemmed safety edges on the main body, rounded corners and brackets for easy, sturdy wall mounting.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Material	Stainless Steel Grade 430	–	The primary material used in the construction of the item. Certain components may be manufactured from different materials.
Material Thickness	0.9	mm	The thickness of the material used for the item's primary construction. The thickness of individual components may vary.
Length	290	mm	Overall external length including the projecting wall mounting brackets.

02 Technical specifications

PARAMETER	VALUE	UNIT	TECHNICAL NOTE
Width	252	mm	Overall external front-to-back dimension including projections.
Height	806	mm	Overall external height of the dispenser.
Internal Length	260	mm	Internal straw-storage length, specified to accommodate the length of the straws.
Weight	6	kg	Exact unit weight: 5.950kg. The specification table rounds this up to 6kg.
Finish	Satin Brushed Finish	–	–
Mounting Type	Wall Mounted	–	–
Mounting Hardware	Wall Mounting Brackets	–	–
Lid Type	Hinged with Opening Tab	–	–
Safety Edges	Hemmed Body Edges	–	–
Corner Design	Rounded	–	–

03 Functional features

01 **Dedicated Straw Storage**
Provides a defined location for breathalyser straws beside a workplace screening point.

02 **Grade 430 Stainless Steel**
Manufactured from 0.9mm Grade 430 stainless steel.

03 **260mm Internal Straw Length**
The 260mm length is internal to accommodate the straws. Overall envelope: 290mm length × 252mm front-to-back width × 806mm height.

04 **Satin Brushed Finish**
Satin brushed stainless steel finish.

05 **Wall Mounting Brackets**
Mounting brackets provide easy, sturdy wall mounting beside the screening point.

06 **Hinged Lid with Opening Tab**
A tab allows ergonomic opening of the hinged lid for refilling.

07 **Hemmed Safety Edges and Rounded Corners**
The main body has hemmed safety edges and rounded corners for a safer edge finish.

08 **5.950kg Unit Weight**
The dispenser weighs 5.950kg.

04 Application information

Intended applications	Change Rooms & Locker Rooms, PPE Storage & Dispensing, Storage & Organisation
Industries	Agriculture & Horticulture, Construction, Food & Beverage Processing, General Manufacturing, Mining & Quarrying

05 Supply and support

Typical lead time	10–15 working days
Warranty	12 months

06 Frequently asked questions

What is the B30848 used for?

It provides a dedicated storage and dispensing point for breathalyser straws at workplace screening stations and staff entry areas.

What are the dispenser dimensions?

The 260mm length is the internal straw-storage dimension, specified to accommodate the length of the straws. The overall external envelope, including projecting brackets and the lid tab, is 290mm long × 252mm wide from front to back × 806mm high. Refer to the dimensioned drawings when planning installation.

What material and thickness are used?

The dispenser is manufactured from 0.9mm Grade 430 stainless steel with a satin brushed finish.

How is the dispenser mounted?

Mounting brackets provide easy, sturdy wall mounting. Select a suitable wall and an accessible position.

How is the dispenser refilled?

The hinged lid has a tab for ergonomic opening and provides access to replenish the stored breathalyser straws.

What finish does the dispenser have?

The stainless steel has a satin brushed finish.

How many straws will it hold?

Storage quantity depends on straw dimensions and packaging. The internal length is 260mm; check the intended straws and their packaging before specifying a fill quantity.

Where can the dispenser be installed?

It can be installed at workplace breathalyser screening points, including staff entry areas at mines, construction sites, manufacturing facilities, food-processing premises and agricultural workplaces.


How much does the dispenser weigh?

The dispenser weighs 5.950kg.


What edge safety features are provided?

The main body has hemmed safety edges and the corners are rounded.


Product drawings and images

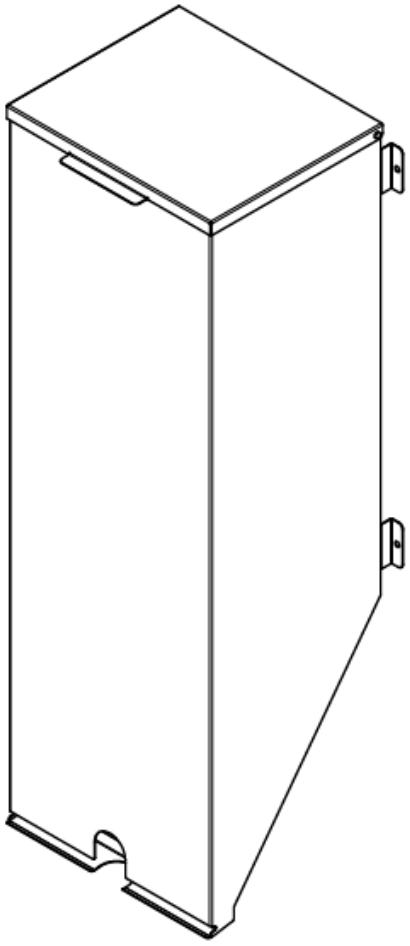


ISOMETRIC VIEW · B30848 isometric view; dimensions in millimetres.

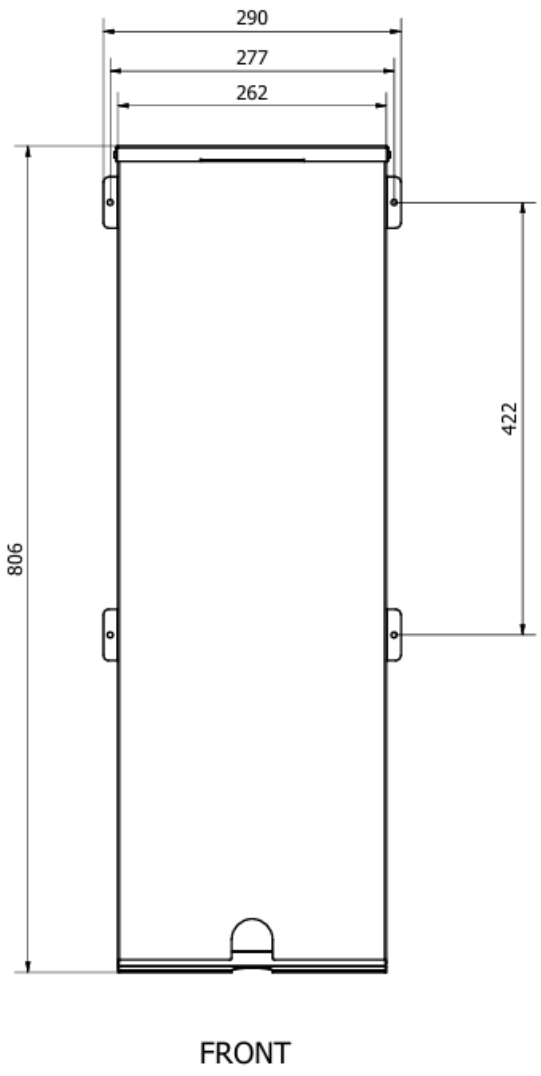

FRONT VIEW · B30848 front view; dimensions in millimetres.

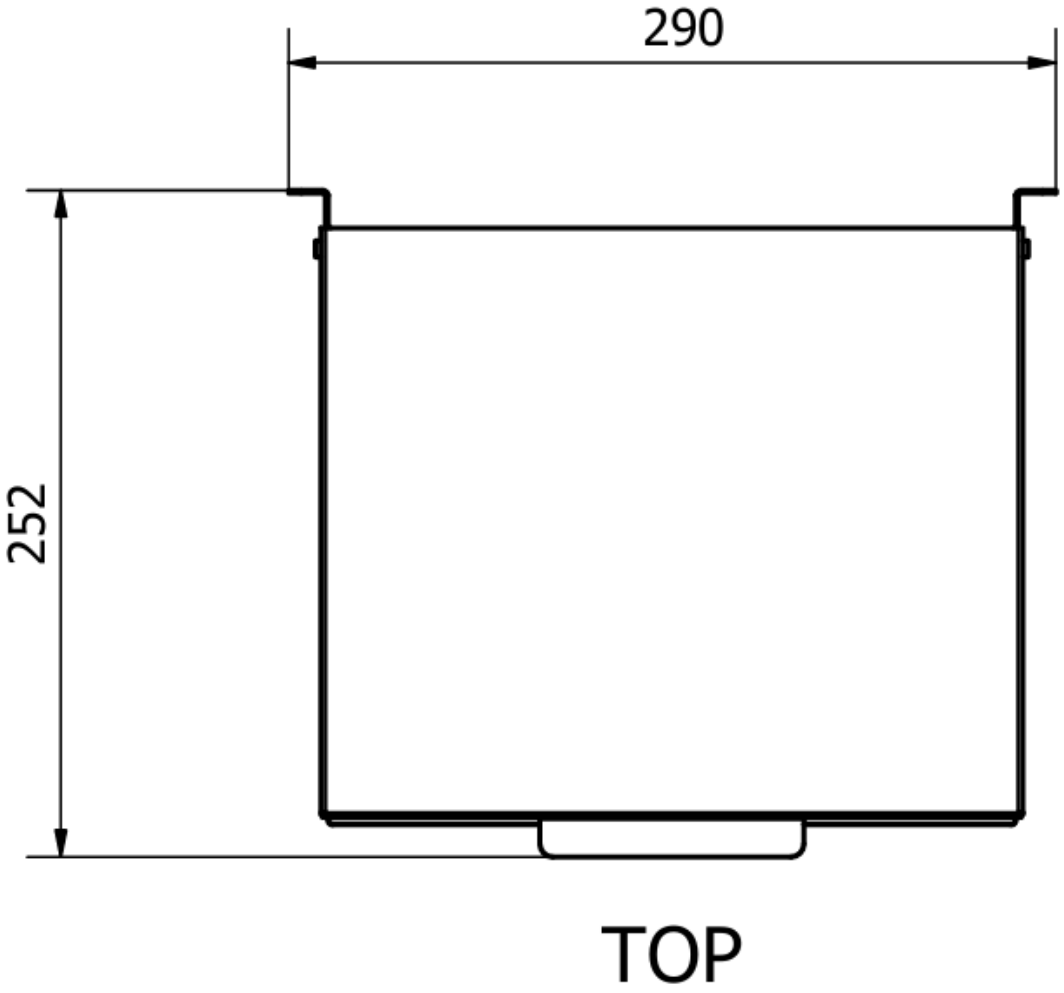

TOP VIEW · B30848 top view; dimensions in millimetres.

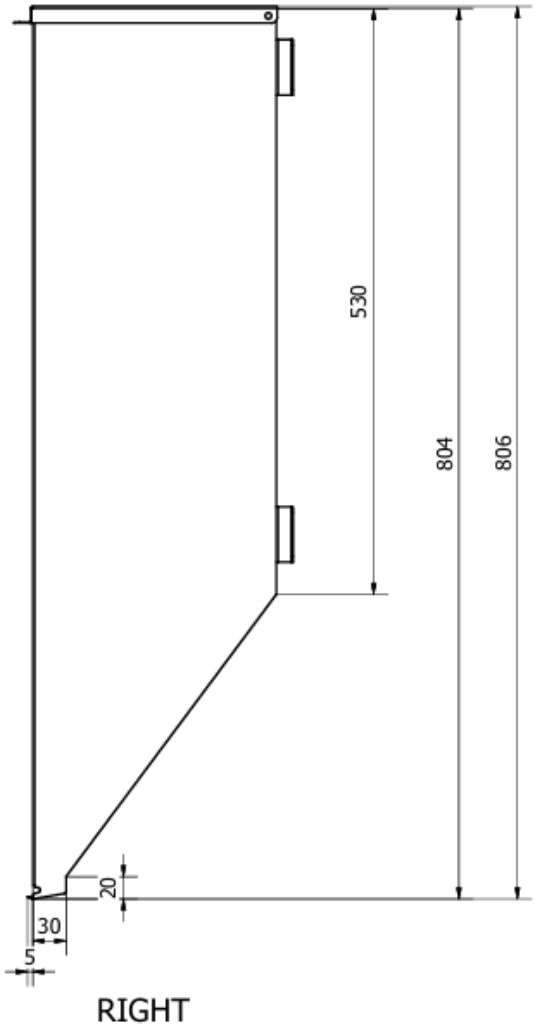

RIGHT VIEW · B30848 right view; dimensions in millimetres.

VERIFICATION REQUIRED Published values are provided for initial specification. Confirm the selected model, critical dimensions, site services, clearances, and the latest document revision with Basterfield before procurement, manufacture, or installation. E&OE. Specifications are subject to change without notice.